



This PDF is generated from authoritative online content, and is provided for convenience only. This PDF cannot be used for legal purposes. For authoritative understanding of what is and is not supported, always use the online content. To copy code samples, always use the online content.

# Genesys Predictive Engagement Administrator's Guide

5/16/2026

# Table of Contents

<b>Get started</b>	
Get started with Predictive Engagement for Genesys Cloud CX	8
Get started with Predictive Engagement for Genesys Engage on-premises	11
Get started with Genesys Predictive Engagement for Genesys Multicloud CX	13
Get started with Predictive Engagement for PureConnect	15
Video Gallery for Genesys Predictive Engagement	17
<b>Global settings</b>	
About global settings	22
Web tracking	24
Predictive Engagement tracking snippet	32
Action settings	42
<b>Segments</b>	
About segments	46
Best practices for segments	49
Examples of segments	51
View segments	54
Manage segments	60
<b>Outcomes</b>	
About outcome predictions and probabilities	73
Outcomes overview	76
View outcomes	80
Manage outcomes	86
<b>Action maps</b>	
About action maps	93
Action maps overview	98
View action maps	101
Create an action map	107
<b>Actions</b>	
About actions	111
About web messaging	114
About web chats	116
About content offers	118
About Architect flow actions	121
<b>Journey shaping</b>	
About journey shaping with sessions and events	124

Types of sessions	127
Web sessions	130
<b>Journey data</b>	
About journey data	135
Live Now	137
Customer summary (admin view)	140
Visit journey map (admin view)	147
Searches performed (admin view)	154
Segments assigned (admin view)	157
Outcome scores (admin view)	159
Additional information (admin view)	161
Unknown visitors (admin view)	166
<b>Analytics</b>	
About analytics	169
Availability of analytics data	171
Visitor Activity	174
Action map performance	181
Outcome performance	183
Segment performance	185
Billing and usage	187
<b>Compliance</b>	
About compliance	189
General Data Protection Regulation (GDPR)	191
About the data we track	195
<b>Audit logs</b>	
View audit logs	198
<b>FAQs</b>	
Genesys Predictive Engagement Administrator FAQs	199

---

## Contents

- [1 Get started](#)
- [2 Track journey events](#)
- [3 Create actions and action maps](#)
- [4 See results](#)
- [5 Third-party integrations](#)
- [6 Solutions, best practices, and business scenarios](#)
- [7 Pre-configured settings](#)
- [8 Glossary](#)

---

Configure and administer Genesys Predictive Engagement for your organization.

## Get started

Get started implementing Genesys Predictive Engagement in your organization.

- Genesys Predictive Engagement overview
- Genesys Cloud CX
- Genesys Engage on-premises
- Genesys Multicloud CX
- PureConnect

---

## Track journey events

Learn how to start tracking visitors on your website with Genesys Predictive Engagement. Then, learn about the tools for identifying and organizing types of visitors and their trackable behaviors.

- Tracking with Predictive Engagement
- Segments
- Outcomes
- Attributes
- About journey data
- Live Now
- About event tracking with tag managers

---

## Create actions and action maps

Learn about the types of actions available in Genesys Predictive Engagement. Learn how to create action maps that use actions to engage visitors and further your business goals.

- Actions

- 
- Action maps
  - Create a web messaging offer
  - Create a web chat offer
  - Create a content offer
  - Configure a content offer action map
  - Integrate with an external system using an Architect flow
- 

## See results

Learn about the analytics capabilities that Genesys Predictive Engagement provides.

- Analytics
  - Availability of analytics data
  - Action map performance
  - Visitor Activity
- 

## Third-party integrations

Use an Architect flow action to send journey context data information to third-party systems using a special type of Architect workflow.

- Salesforce lead creation and campaign attribution
- 

## Solutions, best practices, and business scenarios

Review these articles to improve and extend your use of Genesys Predictive Engagement.

- Predictive Engagement with advanced chat routing
  - Use Google Tag Manager with Genesys Predictive Engagement
  - Use Adobe Launch with Genesys Predictive Engagement
-

---

## Pre-configured settings

Learn about the pre-configured settings that Genesys Predictive Engagement contains. The settings cannot be edited.

- [Maximum entities allowed for an organization](#)
- [Maximum web tracking entries allowed for an organization](#)

---

## Glossary

Learn Genesys Predictive Engagement terminology.

- [Genesys Predictive Engagement Glossary](#)

# Get started with Predictive Engagement for Genesys Cloud CX

## Contents

- [1 Get started with Predictive Engagement and web messaging](#)
- [2 Get started with Predictive Engagement and web chat](#)
- [3 For more information](#)

To use Genesys Predictive Engagement, Genesys Cloud CX customers complete these initial tasks.

### **Related use cases:**

Genesys Predictive Engagement

### **Important**

Predictive Engagement works with web chat; however, we encourage you to use the new web messaging feature to replace web chat.

## Get started with Predictive Engagement and web messaging

Complete the following procedures:

1. Fulfill prerequisites for Genesys Predictive Engagement feature enablement, license, and permissions.
2. Review the supported web browsers listed in the Genesys Cloud CX system requirements.
3. Prepare the required Genesys Cloud CX domains.
4. Configure messenger and deploy it to your website.

### **Tip**

After you configure the allowed domains, use Live Now to verify that Genesys Predictive Engagement is tracking events.

5. Configure web tracking.
6. To use Predictive Engagement commands and events to track website activity, do the following:
  1. Load the Genesys( ) Global function.
  2. Subscribe to the Journey.ready event and then verify in your console log that the Journey plugin is working correctly.
  3. To track page views, use the Journey.pageview command.
  4. To record custom web events, use the Journey.record command.
7. Create segments.
8. Create outcomes.

9. Create action maps.

## Get started with Predictive Engagement and web chat

1. Fulfill prerequisites for Genesys Predictive Engagement feature enablement, license, permissions, and widget configuration and deployment on your website.
2. Review the supported web browsers listed in the Genesys Cloud CX system requirements.
3. Prepare the required Genesys Cloud CX domains.
4. Update your web pages with the Predictive Engagement tracking snippet.
5. Configure web tracking.

### Tip

Initially, configure only the allowed domains. Then use Live Now to verify that Genesys Predictive Engagement is tracking events. After basic tracking works, configure the rest of the web tracking settings.

6. Create segments.
7. Create outcomes.
8. Create actions.
9. Create content offers
10. Create action maps.

## For more information

- [About Predictive Engagement](#)
- [Video: Predictive Engagement for Genesys Cloud CX](#)
- [FAQs](#)
- [Glossary](#)
- [Compliance](#)

# Get started with Predictive Engagement for Genesys Engage on-premises

## Contents

- [1 Complete the following procedures](#)
- [2 For more information](#)

To use Genesys Predictive Engagement, Genesys Engage on-premises-based customers complete these initial tasks.

## Complete the following procedures

1. Provision Genesys Multicloud CX hybrid integrations.
2. Fulfill prerequisites for Genesys Engage on-premises Deployments.
3. Review the supported web browsers listed in the Genesys Cloud CX system requirements.
4. Prepare the required Genesys Cloud CX domains.
5. Deploy the Genesys Predictive Engagement Plugin for Workspace Desktop Edition.
6. Configure the Agent Pacing Service.
7. **In the Genesys Cloud CX Admin menu, assign permissions to your users.**
8. Update your web pages with the Predictive Engagement tracking snippet.
9. Configure Web tracking.

### Tip

Initially, configure only the allowed domains. Then use Live Now to verify that Genesys Predictive Engagement is tracking events. After basic tracking works, configure the rest of the web tracking settings.

10. Create segments
11. Create outcomes.
12. Create actions.
13. Create action maps.
14. Use LiveNow to see visitor activity on your website.

## For more information

- [About Predictive Engagement](#)
- [FAQs](#)
- [Glossary](#)
- [Compliance](#)

# Get started with Genesys Predictive Engagement for Genesys Multicloud CX

## Contents

- [1 Overview](#)
- [2 For more information](#)

To use Genesys Predictive Engagement, Genesys Multicloud CX-based customers complete these initial tasks.

## Overview

1. Work with your Genesys Support team to complete the initial integration with Genesys Multicloud CX.
2. Fulfill prerequisites for Genesys Multicloud CX Deployments.
3. Configure permissions and routing logic.
4. Log in to Predictive Engagement.
5. Create segments
6. Create outcomes.
7. Monitor web activity with LiveNow.
8. Configure your web pages.
9. Create actions.
10. Create action maps.
11. Receive chats in Agent Workspace.

## For more information

- [About Predictive Engagement](#)
- [FAQs](#)
- [Glossary](#)
- [Compliance](#)

# Get started with Predictive Engagement for PureConnect

## Contents

- [1 Complete the following procedures](#)
- [2 For more information](#)

To use Genesys Predictive Engagement, PureConnect customers complete these initial tasks.

### Complete the following procedures

1. Verify prerequisites for PureConnect.
2. Configure Predictive Engagement in PureConnect.
3. Review the supported web browsers listed in the Genesys Cloud CX system requirements.
4. Prepare the required Genesys Cloud CX domains.
5. Update your webpages with the Genesys Predictive Engagement tracking snippet.
6. Configure Web tracking.

#### Tip

Initially, configure only the allowed domains. Then use Live Now to verify that Genesys Predictive Engagement is tracking events. After basic tracking works, configure the rest of the web tracking settings.

7. Create segments
8. Create outcomes.
9. Create actions.
10. Create action maps.
11. Use LiveNow to see customer activity on your website

### For more information

- [About Predictive Engagement](#)
- [About Predictive Engagement in PureConnect](#)
- [FAQs](#)
- [Glossary](#)
- [Compliance](#)

# Video Gallery for Genesys Predictive Engagement

[View administrator videos.](#)

## Selected Videos

Create content offer overview

From:

Example: Create an action map for a web chat offer

From:

Example: How to create an action map

From:

Example: Link a content offer to an action map

From:

Prepare an action map to use an Architect flow action

From:

Prepare the Salesforce Lead Creation and Campaign Attribution example workflow

From:

Prepare the Salesforce integration and data actions

From:

Segment based on how a visitor searches

From:

## Site search settings

From:

## Contents

- [1 Selected Videos](#)



# About global settings

Learn how to configure Genesys Predictive Engagement at a global (organizational) level.

## Contents

- [1 Tracking settings](#)
- [2 Tracking snippet](#)
- [3 Action settings](#)

## Tracking settings

Configure how to track visitors as they move through your website. For example, you can specify the domains to track and configure web-related tracking settings, such as whether to exclude query parameters and track URL fragments.

- Configure web tracking
- 

## Tracking snippet

Start tracking visitors on your website using the tracking snippet.

If you are a Genesys Cloud CX customer, we encourage you to use the new web messaging feature to replace web chat. To start tracking visitors on your website, configure and deploy messenger instead.

- Copy and deploy the tracking snippet
- 

## Action settings

Configure frequency capping for presenting web chats and content offers to visitors during a single session.

- Configure frequency capping
-

# Web tracking

## Contents

- [1 Configure web tracking](#)
- [2 Allowed domains](#)
- [3 Exclude IP addresses](#)
- [4 IP examples](#)
  - [4.1 Valid IP addresses \(IPv4\)](#)
  - [4.2 Valid IP addresses \(IPv6\)](#)
- [5 Short ID length](#)
- [6 Exclude URL query parameters](#)
- [7 Keep URL fragments](#)
- [8 Site search settings](#)

Configure how Genesys Predictive Engagement tracks visitors as they move through your website.

### Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Settings > Edit**, or **View**
- Deploy one of the following:
  - For Genesys Cloud CX customers using web messaging, configure and deploy Genesys Messenger.
  - For all other customers, deploy the tracking snippet.

## Configure web tracking

---

**Tracking Settings** | Tracking Snippet | Action Settings

## Web Tracking

Define how you track the paths your customers take through your website. Save

**Allowed Domains**

alto-universal.com ✎ 🗑

Add more

---

**Exclude IP Addresses**

Add IP address

---

**Short ID Length**

5 ▾

---

**Exclude URL Query Parameters**

license ✎ 🗑

zipCode ✎ 🗑

Add more

---

**Keep URL Fragments**

Yes  
 No

---

**Site Search Settings**

term ✎ 🗑

Add more


1. In Admin in Genesys Cloud CX, open the **Global Settings** page and then click the **Tracking Settings** tab.
2. Specify the allowed domains.

### Tip

Initially, configure only the allowed domains. Then use Live Now to verify that Genesys Predictive Engagement is tracking events. After basic tracking works, configure the rest of the web tracking settings.

3. Specify any excluded IP addresses.
4. Specify the short ID length.
5. Specify any URL query parameters for Genesys Predictive Engagement to ignore.
6. Indicate whether Genesys Predictive Engagement should keep URL fragments.
7. Specify any site search settings.
8. Save your changes.

## Allowed domains

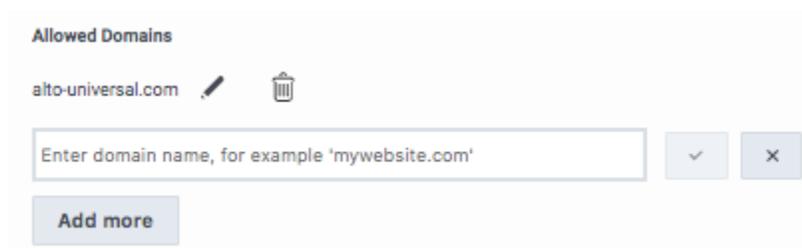

**Allowed Domains**

alto-universal.com  

Enter domain name, for example 'mywebsite.com'  

**Add more**

### Important

To configure the allowed domains if you are a Genesys Cloud CX customer using web messaging, see "Restrict domain access" in the Deploy Messenger article in the Genesys Cloud CX Resource Center.

Identify the website domains from which to accept web traffic.

### Important

- Include only domain and sub-domain labels. Do not include other "/paths" after the domain.
- Genesys Predictive Engagement validates your domain entries and, if any are incorrect, displays an error message.

- **NEW:** This list of allowed domains should match the list of allowed domains for the widget.

## Exclude IP addresses



**Exclude IP Addresses**

Add IP address

---

**Short ID Length**

5

You can designate IP addresses for which you don't want Genesys Predictive Engagement to generate web events. For example, when you don't want to track visits from internal users.

### Important

- This feature works in addition to whatever blocking your corporate IT department does to block external traffic (for example, from competitors, robo-spammers).
- You can add up to 10 IP filters.
- If you are not sure what IP addresses to exclude, check with your network administrator and watch incoming traffic on your website logs.
- IP filtering works only when Genesys Predictive Engagement processes web beacons. Therefore, you cannot use this setting to block Genesys Predictive Engagement's tracking of custom events.

To block an IP address, add it to the list of IP addresses to exclude.

**IP filter:** Specify either a single IP address or use CIDR notation to specify a range of IP addresses.

- Genesys Predictive Engagement supports both IPv4 and IPv6 protocols. For IPv6, Genesys Predictive Engagement supports the shorthand and expanded version.
- IP examples

**Reference name for the IP filter:** Specify a recognizable name for the IP address.

**Tip**

To see the implied CIDR range of the IP address that you provided, rest your mouse on it.

## IP examples

### Valid IP addresses (IPv4)

Valid IPv4 CIDR input follows the format: *./*.

Good examples	Bad examples
<ul style="list-style-type: none"><li>• 10.10.10.10/8</li><li>• 10.10.10.10/16</li><li>• 10.10.10.10/24</li><li>• 10.10.10.10/32</li></ul>	<ul style="list-style-type: none"><li>• 10.10.10.10/33 (the max for IPv4 is /32)</li><li>• 10.10.10.10/-1 (cannot be a negative number)</li><li>• 10.10.10.10/.10 (must be a whole number)</li><li>• 10.10.10.10/&amp; (no special characters allowed)</li><li>• 10.10.10.10/8/16 (only 1 slash allowed)</li></ul>

### Valid IP addresses (IPv6)

Valid IPv6 CIDR input follows the format: *./*.

Good examples	Bad examples
<ul style="list-style-type: none"><li>• ::1/32</li><li>• ::1/64</li><li>• ::1/128</li></ul>	<ul style="list-style-type: none"><li>• ::1/129 (the max for IPv6 is /128)</li><li>• ::1/-1 (cannot be a negative number)</li><li>• ::1/.10 (must be a whole number)</li><li>• ::1/&amp; (no special characters allowed)</li><li>• ::1/128/64 (only 1 slash allowed)</li></ul>

## Short ID length

Genesys Predictive Engagement assigns each visit a unique number based on a lengthy, automatically-generated ID. In the Short ID box, specify the number of digits for Genesys Predictive Engagement to use for each visit ID.

Choose a short ID length that is long enough to be unique among all visitors that are active on your website currently. The more traffic your site gets, the longer your short ID should be. For example, if you always have less than 10,000 visitors at any time, a short ID length of 4 will suffice. If you could have more than 100,000 visitors at any one time, choose a short ID length of 6.

### Important

You can increase the length of the short ID at any time. Your changes are effective immediately.

## Exclude URL query parameters

Specify any URL Query Parameters for Genesys Predictive Engagement to ignore. URL query parameters appear near the end of URLs. They can lead to overly-specific tracking data. They also have the potential to expose personally identifiable information, which violates GDPR.

## Keep URL fragments

You can configure whether Genesys Predictive Engagement uses URL fragments to identify web pages.

URL fragments appear after a URL. For example, in "predictive-engagement.com#pagename", #pagename is a URL fragment.

While URL fragments can identify specific webpages, they also have the potential to expose personally identifiable information, which violates GDPR. They can also result in an excess amount of tracking data.

### Important

Unless you want to track the URL fragments, do not enable this option.

## Site search settings

---

### Link to video

Each time a visitor searches your site, the URL for your webpage changes. Since Genesys Predictive Engagement tracks URL changes, the information about each visitor's specific searches can appear as part of the customer journey data. You can see this information in Live Now under Searches performed. Your agents have a similar view.

To configure, in the **Site search settings** box type the URL parameter for search terms on your website. For example, suppose that when a visitor searches for "Sale," the string, "?term=Sale#search" appends to the end of your URL. In this case, type **term** in the **Site search settings** box.

### Tip

If you do not know your URL parameter for search terms, try searching for something on your website. Then note what appears when the URL changes.

# Predictive Engagement tracking snippet

## Contents

- [1 About the tracking snippets](#)
- [2 Before you begin](#)
- [3 Copy the snippet](#)
- [4 Ad blockers](#)
- [5 Types of tracking snippets and recommendations](#)
  - [5.1 Website snippet](#)
  - [5.2 SPA snippet](#)
  - [5.3 Snippet recommendations](#)
- [6 Deployment overview](#)
- [7 \(Optional\) Customize how the snippet tracks activity](#)
- [8 Deploy the snippet](#)
  - [8.1 About deploying the snippet](#)
  - [8.2 Deployment instructions](#)
- [9 Verify that the snippet works](#)
  - [9.1 Troubleshoot the snippet](#)
  - [9.2 Error reference](#)
- [10 Call the tracking snippet](#)
- [11 Other tracking options](#)
  - [11.1 Web tracking](#)
  - [11.2 Custom modules](#)
  - [11.3 Event tracking with tag managers](#)
  - [11.4 Domain and subdomain tracking with cookies](#)

Learn about Genesys Predictive Engagement's tracking abilities and how you can start tracking visitors on your website.

### Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Settings > Edit**, or **View**

#### Important

This article only applies to customers using web chat. If you are a Genesys Cloud CX customer, we encourage you to use the new web messaging feature to replace web chat.

## About the tracking snippets

Customers who want to use web chat must deploy the Predictive Engagement tracking snippet. This snippet deploys Predictive Engagement tracking on your website and also allows you to use the web chat feature.

Genesys Cloud CX customers who want to use web messaging must deploy the Messenger snippet. This snippet deploys Predictive Engagement tracking on your website and also allows you to use the web messaging feature.

#### Important

This article provides instructions for deploying the Predictive Engagement tracking snippet only.

## Before you begin

Read about the type of data that Genesys Predictive Engagement tracks and how to ensure that you track visitor data in a regulatory-compliant manner. Understand the implications of using ad blocking software. Finally, learn how the tracking snippet works and the types of tracking snippets available.

- About the data we track

- Predictive Engagement and GDPR
- Ad blockers
- About the tracking snippet
  - Types of snippets
  - Snippet recommendations
- Genesys Predictive Engagement and widgets
- Deployment overview

## Copy the snippet

[Tracking Settings](#) **[Tracking Snippet](#)** [Action Settings](#)

### Tracking Snippet

Use Predictive Engagement's tracking snippet to track visitor activity on your webpages.

Documentation related to advanced configuration options can be found [here](#)

### Website Snippet

This snippet should be used if the website loads a new page from a remote server when navigating to a new URL

```
<script>
(function(a,t,c,l,o,u,d){a['_genesysJourneySdk']=o;a[o]=a[o]||function(){
(a[o].q=a[o].q||[]).push(arguments)},a[o].l=1*new Date();u=t.createElement(c),
d=t.getElementsByTagName(c)[0];u.async=1;u.src=1;u.charset='utf-8';d.parentNode.insertBefore(u,d)
})(window, document, 'script', 'https://[redacted]', 'ac');
ac('init', '[redacted]', { environment: 'dev' });
ac('pageview');
</script>
```

Copy snippet

### SPA Snippet

This snippet should be used if the website does not load a new page from a remote server when navigating to a new URL

```
<script>
(function(a,t,c,l,o,u,d){a['_genesysJourneySdk']=o;a[o]=a[o]||function(){
(a[o].q=a[o].q||[]).push(arguments)},a[o].l=1*new Date();u=t.createElement(c),
d=t.getElementsByTagName(c)[0];u.async=1;u.src=1;u.charset='utf-8';d.parentNode.insertBefore(u,d)
})(window, document, 'script', 'https://[redacted]', 'ac');
ac('init', '[redacted]', { environment: 'dev' });
ac('load', 'autotrackUrlChange');
</script>
```

Copy snippet

Genesys Predictive Engagement provides a tracking snippet that you can copy and paste. Since you are logged in to Genesys Cloud CX, the tracking snippet already contains your organization ID and region.

1. Determine which snippet to use.
2. In Admin in Genesys Cloud CX, open the **Global Settings** page and then click the **Tracking Snippet** tab.
3. Copy the tracking snippet.
4. Paste the snippet. For more information about where to paste the snippet, see [Deploy the snippet](#).

## Ad blockers

Ad blockers are plug-ins or browser extensions that improve page load times and minimize questionable tracking. The majority of ad blockers tested with out-of-the-box settings do not interfere with Genesys Predictive Engagement's tracking capabilities. However, there are a couple considerations if you use uBlock Origin:

- uBlock Origin disables Genesys Predictive Engagement's tracking web beacons; this effectively prevents Genesys Predictive Engagement's tracking capabilities.
- uBlock Origin and uBlock Plus Adblocker block popular tag managers such as Adobe Tag Manager, Google Tag Manager, and more.

### Important

If you use a tag manager to manage JavaScript and tracking on your website, consider adding ad blocker detection to your site to notify visitors with detected ad blockers that they may be missing some important functionality. Also, instead of using a tag manager to deploy the Genesys Predictive Engagement tracking snippet, consider placing the tracking snippet directly in the body or header of your website.

## Types of tracking snippets and recommendations

### Website snippet

The Website snippet provides tracking support to traditional webpages that contain little or no dynamic content. Traditional websites load a new HTML page whenever the visitor navigates to a different URL. To provide tracking support to traditional webpages, the Website snippet calls `ac('pageview')` each time the web browser loads a new page.

### SPA snippet


The SPA snippet can track activity on Single Page Applications (SPAs). SPAs load dynamic content on

demand without requiring a hard reload of the HTML page. The SPA snippet can also track when visitors click relative links, which the Website snippet does not. The SPA snippet works on SPAs such as Angular, React, and Vue.js. For more information about the additional tracking options available with the SPA snippet, see `autotrackURLChange`.

### Snippet recommendations

<b>If you have this type of website...</b>	<b>Use this snippet...</b>
Not sure	SPA
Mix of traditional and SPA pages	SPA
Traditional pages only	Website

### Deployment overview

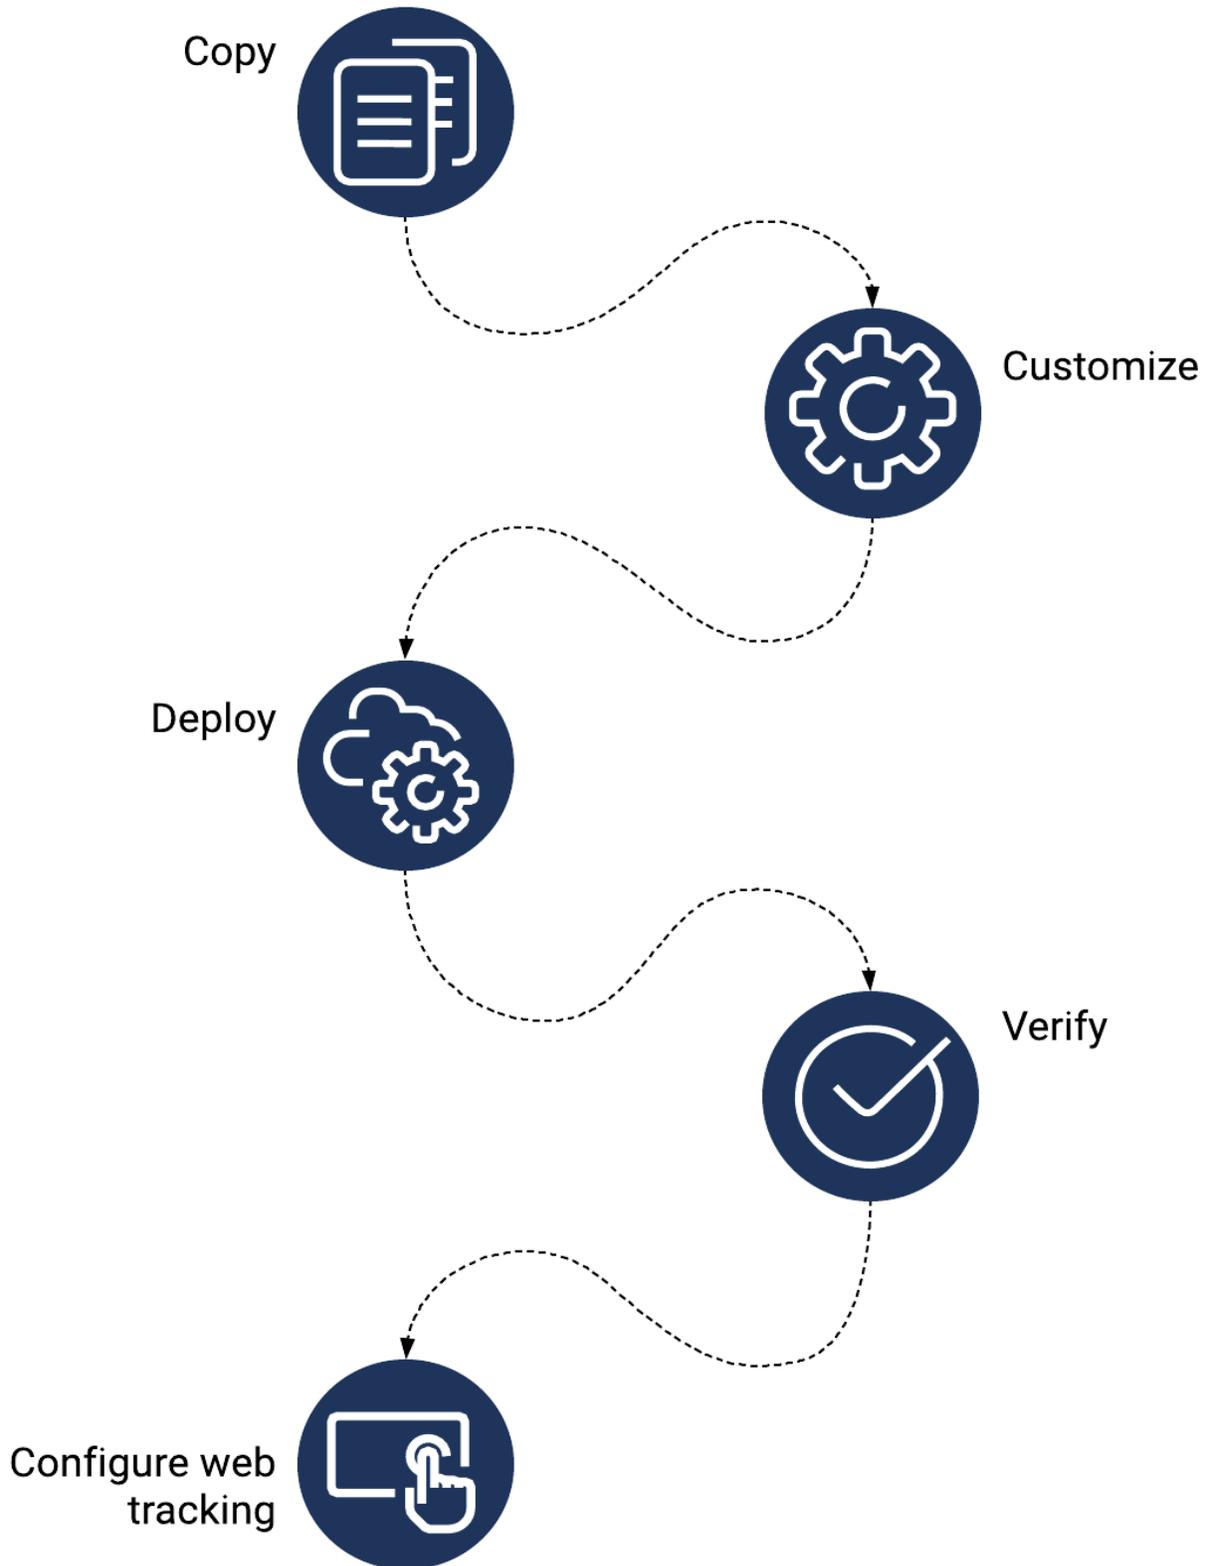

1. Copy the snippet.
2. (Optional) Customize the snippet.
3. Deploy the snippet.
4. Verify that the snippet works.
5. Configure web tracking.

### Tip

For more information about advanced chat routing, see [Genesys Predictive Engagement with advanced chat routing](#).

## (Optional) Customize how the snippet tracks activity

You can customize how the snippet tracks activity on your website.

- To customize how Genesys Predictive Engagement tracks activity on your website, see [About event tracking with tag managers](#).
- To customize the Genesys Predictive Engagement tracking snippet with functions, see the [Journey JavaScript SDK](#).

## Deploy the snippet

### About deploying the snippet

- Deploy the widgets transport above the location where you deploy the Genesys Predictive Engagement tracking snippet.
- Deploy the Genesys Predictive Engagement tracking snippet on the main window of the website to track.
- Paste the tracking snippet in the head section of the website template page before the closing tag.
- Do not deploy the tracking snippet in an iframe.
- The Genesys Predictive Engagement tracking snippet loads JavaScript asynchronously without slowing down page loading. For more information about how the tracking snippet works, see [About the tracking snippet](#).

## Deployment instructions

### Important

Deploy the widgets transport transport above the location where you deploy the Genesys Predictive Engagement tracking snippet.

After you copy the snippet, do one of the following:

- To deploy the tracking snippet manually, paste the copied snippet on your website.
- To deploy the tracking snippet using Google Tag Manager, see [Deploy the tracking snippet with Google Tag Manager](#).
- To deploy the tracking snippet using Adobe Launch, see [Use Adobe Launch with Genesys Predictive Engagement](#).
- To deploy the tracking snippet using another tag manager, see the tag manager vendor's instructions.

### Important

uBlock and other ad blocking software is known to block tag managers, in which case the tracking snippet deployed through the tag manager would also be blocked. For more information, see [Ad blockers](#).

## Verify that the snippet works

After deploying the tracking snippet, use Live Now to verify that Genesys Predictive Engagement is tracking your website activity. You should see an update every 4-5 seconds.

## Troubleshoot the snippet

If the tracking snippet does not work properly when you load your web pages, check the following:

- Is the snippet on the correct page?
- Is the snippet in the correct place in the page header?
- Are the parameters defined correctly?
- Are there any typos, missing characters, or extra white space?
- Were any characters replaced with their printable equivalents?
- Is the domain on the list of allowed domains?

For more suggestions, see about deploying the snippet.

### Error reference

Error code	Description
403 error	Is your domain in the list of allowed domains?
404 error	Is there extra white space in the snippet? <b>Note:</b> In a URL, white space is encoded as %20.
Bad request	Is there extra white space in the snippet? <b>Note:</b> In a URL, white space is encoded as %20.
Initialization error	Are there any of the following in the snippet: <ul style="list-style-type: none"><li>• Typos</li><li>• Missing characters</li><li>• Dashes and quotes in URLs replaced with printable equivalents</li></ul>

### Call the tracking snippet

After the tracking snippet is on your webpages, call it using one of the following:

- If you use the traditional snippet, call `ac('init')` to initialize the Journey JavaScript SDK. For more information, see `init`.
- If you use the SPA snippet, use `ac('load')` to load the **autotrackUrlChange** module and initialize the Journey JavaScript SDK. For more information, see `load` and `autotrackURLChange`.

After you initialize the Journey JavaScript SDK, Predictive Engagement tracks pageview events when visitors arrive on your webpages. For more information, see `Tracking methods`.

### Other tracking options

#### Web tracking

Use the Web tracking feature to specify the domains to track and configure web-related tracking settings.

## Custom modules

Use a set of modules to enhance the functionality that the Journey JavaScript SDK provides.

## Event tracking with tag managers

Use your tag manager to build custom tags and triggers that define how Predictive Engagement tracks activity on your website. For more information, see [About event tracking with tag managers](#).

## Domain and subdomain tracking with cookies

Use cookies to track domains and subdomains. For more information, see [Cookies and Advanced tracking with cookies](#).

# Action settings

## Contents

- [1 Configure frequency capping](#)
- [2 Web chats](#)
- [3 Content offers](#)
- [4 Web messaging](#)

Configure frequency capping of web chats, content offers, and web messaging.

### Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Settings > Edit**, or **View**

## Configure frequency capping

The screenshot shows the 'Action Settings' tab in the Genesys Cloud CX interface. The page is titled 'Frequency Capping' and includes a 'Save' button. It is divided into two sections: 'Web Chat' and 'Content Offer'. Each section contains three settings: a toggle for 'Don't offer another [type] after a conversation with an agent', a toggle for 'Don't offer another [type] after a rejection', and a text input for 'Apply a minimum time duration before offer of next [type]'. The 'Web Chat' section has the first two toggles set to 'On' and 'Off' respectively, and a time duration of '00:20'. The 'Content Offer' section has all three settings set to 'On' and a time duration of '00:45'.

Section	Setting	Value
Web Chat	Don't offer another web chat after a conversation with an agent.	On
	Don't offer another web chat after a rejection.	Off
	Apply a minimum time duration before offer of next web chat.	00:20 HH:MM
Content Offer	Don't offer another content offer after an acceptance.	On
	Don't offer another content offer after a rejection.	On
	Apply a minimum time duration before offer of next content offer.	00:45 HH:MM

If a visitor qualifies for multiple action maps during a single session, Genesys Predictive Engagement could offer each web engagement separately. The offers can present even though the visitor rejected, accepted, or completed an offer previously during the same session.

To stop offering web chats, content offers, or web messaging to visitors **during the same session**

after specific criteria is met, configure the global frequency capping settings.

1. In Admin in Genesys Cloud CX, open the **Global Settings** page and then click the **Action Settings** tab.
2. Configure the web chat, content offer, or web messaging settings as needed.

### Important

You can override these global settings for an individual action map. For more information, see [Override global frequency capping settings](#).

## Web chats

Configure whether to stop offering web chats to a visitor **during the same session** and under certain conditions.

- **Don't offer another web chat after a conversation with an agent:** Indicates whether to stop offering web chats to a visitor after the visitor chats with an agent.
- **Don't offer another web chat after a rejection:** Indicates whether to stop offering web chats to a visitor after the visitor rejects a web chat.
- **Apply a minimum wait time before offering next web chat:** Period of time, in HH:MM format, to stop offering web chats to a visitor. A session can last for hours but if it times out after 20 minutes of inactivity, this setting is inapplicable. The maximum number of hours that you can specify is 23; and the maximum number of minutes is 59.

### Important

If both toggles are set to **Yes**, the time picker is unavailable as it has no effect in this instance.

## Content offers

Configure whether to stop presenting content offers to a visitor **during the same session** and under certain conditions.

- **Don't present another content offer after an acceptance:** Indicates whether to stop presenting content offers to a visitor after the visitor accepts a content offer.
- **Don't present another content offer after a rejection:** Indicates whether to stop presenting content offers to a visitor after the visitor rejects a content offer.
- **Apply a minimum wait time before presenting next content offer:** Period of time, in HH:MM format, to stop presenting content offers to a visitor. A session can last for hours but if it times out after 20 minutes of inactivity, this setting is inapplicable. The maximum number of hours that you can

specify is 23; and the maximum number of minutes is 59.

### Important

If both toggles are set to **Yes**, the time picker is unavailable as it has no effect in this instance.

## Web messaging

### Feature coming soon: Web messaging

If you are a Genesys Cloud CX customer, we encourage you to use the new web messaging feature to replace web chat.

### Important

If your organization doesn't use web messaging, these options aren't visible.

Configure whether to stop presenting web messaging offers to a visitor **during the same session** and under certain conditions.

- **Don't present another web messaging offer after a conversation with an agent:** Indicates whether to stop offering web messaging to a visitor after the visitor chats with an agent.
- **Don't present another web messaging offer after a rejection:** Indicates whether to stop offering web messaging to the visitor after a visitor rejects a web messaging offer.
- **Apply a minimum wait time before presenting next web messaging offer:** Period of time, in HH:MM format, to stop offering web messaging to a visitor. A session can last for hours but if it times out after 20 minutes of inactivity, this setting is inapplicable. The maximum number of hours that you can specify is 23; and the maximum number of minutes is 59.

### Important

If both toggles are set to **Yes**, the time picker is unavailable as it has no effect in this instance.

# About segments

Learn how to identify (segment) visitors based on their shared characteristics. Later, you design action maps to engage specific segments of visitors and then filter by segments to evaluate how well you are engaging them.

## Contents

- [1 Best practices and examples](#)
- [2 Segments](#)
- [3 Attributes and operators](#)
- [4 Segment usage](#)

## Best practices and examples

Review best practices and examples to improve how you create segments.

- Best practices
  - Examples
  - Video: Segment based on search queries
  - Video: Use an event tag to build a segment of users who wait 6 seconds on a page
- 

## Segments

### **Feature coming soon: Customer segments**

Create and maintain session segments, customer segments, and third-party segments. Determine when segments are available for use in action maps and reports, and when agents can see them in the Journey gadget.

- Search for and view your segments
  - Manage segments
  - Duplicate a segment
  - Delete a segment
- 

## Attributes and operators

Conditions are the criteria by which Genesys Predictive Engagement assigns visitors to segments. Every condition must have an operator.

- About attributes
  - Operators
-

## Segment usage

Use segments to trigger action maps and evaluate visitor activity.

- Trigger an action map when a segment matches
  - Filter the Visitor Activity report by segments
  - View the segments assigned to a user in LiveNow (admins)
  - View the segments assigned to a user in the Journey gadget (agents)
  - View segment metrics
  - View segment report
-

# Best practices for segments

## Contents

- [1 Best practices](#)

Learn about best practices for improving how you create outcomes.

## Best practices

Genesys Predictive Engagement tracks activity on your website at a detailed level. To trigger a specific action map, the visitor's behavior must match exactly to the segments defined for the action map.

### Important

- Create segment-based conditions with a specific action map in mind: group them logically and define them in the correct sequence.
- To define a segment, you must specify at least one condition.
- You can use a combination of segment-based conditions and outcome-based conditions.
- The more conditions you define, the fewer number of visitors match the segment.
- Conditions are not shared across segments and outcomes.

# Examples of segments

## Contents

- [1 Segment based on how a visitor searches](#)
- [2 Trigger based on visitor activity: abandoned form](#)

Review examples of segments to get ideas for your own segments.

## Segment based on how a visitor searches

[Link to video](#)

To add visitors to segments based on their search queries, define a "Search query" attribute. For more information, see Visitor journey attributes.

### Visitor journey

For example, all visitors who come to your Home page or purchase something on your website

Search query ▾	equals ▾	switch, discount	✓	✕
----------------	----------	------------------	---	---

### Important

Because of frequent updates, the user interface in the accompanying video may appear different in your environment.

## Trigger based on visitor activity: abandoned form

In the following example, an action map triggers when a visitor using Chrome version 56 goes to the **Request Quote** page, but then navigates to the **About** page before completing the request.

First define the visitor attributes:

### Visitor attributes

For example, identify all visitors from Canada or who use Google Chrome

Browser family ▾	equals ▾	Chrome	✓	✕
Browser version ▾	equals ▾	56	✓	✕

⊕ add detail

Add next attribute

Then define the journey details:

---

## Examples of segments

---

### Visitor journey

For example, all visitors who come to your Home page or purchase something on your site

Event name	▼	equals	▼	form.abandoned	✓	✕
Page URL	▼	like	▼	about	✓	✕

⊕ add detail

**Add next activity**

# View segments

## Contents

- [1 View segments list](#)
- [2 AI-318 Third party segments](#)
- [3 Search for segments](#)
- [4 Create a segment](#)
- [5 Edit a segment](#)
- [6 Duplicate a segment](#)
- [7 Delete a segment](#)
- [8 View segment report](#)

Learn how to search for, create, edit, duplicate, and delete segments.

### Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Segment > Add , Delete, Edit, View**

## View segments list

Segments  
Group your customers by their shared characteristics or behaviors.

[Create segment](#) [Segment Reporting can be found here](#)

Name	Updated	Description	Type	Source	Active	Color	Options
30-45 Prospect Score 500+	July 28, 2021	Journey representation of an Adobe segment edited to appear in audit	Customer			Teal	
a exp segeg	April 23, 2021		Customer			Orange	
A1#B1	July 21, 2021	test	Customer			Orange	
A2	March 29, 2021		Customer			Orange	
aaaaa	July 28, 2021		Customer			Orange	

**Name:** Segment name.

**Updated:** Date the segment was last modified in Predictive Engagement.

**Description:** Segment description.

**Type:** Segment type (such as session or customer).

**Active:** Indicates whether the segment is ready to match visitors on your website.

**Color:** Background color to use when displaying the segment name (for example, in Live Now and the Action Map Report).

**Options:** Menu of options available for the segment, such as edit, delete, and duplicate.

## Search for segments

## View segments

Segments  
Group your customers by their shared characteristics or behaviors.

[Create segment](#) [Segment Reporting can be found here](#)

Q d

Name	Updated	Description	Type	Source	Active	Color	Options
30-45 Prospect Score 500+	July 28, 2021	Journey representation of an Adobe segment edited to appear in audit	Customer	o	o	Teal	⋮
Abandoned Check	July 10, 2020	GSol Test edited2	Session	o	o	Orange	⋮
Agent Assist - Dev	September 21, 2020	Segment usedd for agent assist development	Session	o	o	Orange	⋮
asdasdasdasdad	February 12, 2021		Session	o	o	Orange	⋮
ATM - Cash Withdrawal	July 26, 2021	Describes customers who have made a cash withdrawal in an ATM session.	Session	o	o	Purple	⋮
ATM - Pin Changed	November 20, 2019	Describes customers who have changed their PIN in an ATM session.	Session	o	o	Light blue	⋮
ATM - Pin Incorrect	September 14, 2020	Describes customers who have entered their PIN incorrectly in an ATM session.	Session	o	o	Orange	⋮
atmid not 4	February 24, 2020		Session	o	o	Blue	⋮
auto insurance	November 4, 2020	edited	Session	o	o	Pink	⋮
cd_Test	October 7, 2020		Session	o	o	Navy	⋮
cd_test3	July 14, 2020		Session	o	o	Orange	⋮
cd_Test3	July 14, 2020		Session	o	o	Orange	⋮
cd_Test3	July 14, 2020		Session	o	o	Orange	⋮

1 - 25 of 218  per page Page 1 of 9

Type one or more characters (not case-sensitive) for which to search. As you type, only the segments that match your criteria appear in the list.

A column heading with an arrow indicates that you can click the arrow to sort the list by that entity. An upward-pointing arrow indicates that the list is in ascending order and a downward-pointing arrow indicates that the list is in descending order.

## Create a segment

Segments  
Group your customers by their shared characteristics or behaviors.

[Create segment](#) [Segment Reporting can be found here](#)

Q Search

Name	Updated	Description	Type	Source	Active	Color	Options
30-45 Prospect Score 500+	July 28, 2021	Journey representation of an Adobe segment edited to appear in audit	Customer	o	o	Teal	⋮
a exp segeg	April 23, 2021		Customer	o	o	Orange	⋮
A1#B1	July 21, 2021	test	Customer	o	o	Orange	⋮
A2	March 29, 2021		Customer	o	o	Orange	⋮
aaaaa	July 28, 2021		Customer	o	o	Orange	⋮
AB bughunt II	February 19, 2021		Session	o	o	Orange	⋮
Abandoned Check	July 10, 2020	GSol Test edited2	Session	o	o	Orange	⋮

To create a segment, click **Create segment** and then follow the instructions in [Manage segments](#).

## Edit a segment

## View segments

Segments  
Group your customers by their shared characteristics or behaviors.

Create segment [Segment Reporting can be found here](#)

Name	Updated	Description	Type	Source	Active	Color	Options
30-45 Prospect Score 500+	July 28, 2021	Journey representation of an Adobe segment edited to appear in audit	Customer		<span>●</span>	Teal	View
a exp segeg	April 23, 2021		Customer	o.u.	<span>●</span>	Orange	Edit
A1+B1	July 21, 2021	test	Customer	o.u.	<span>●</span>	Orange	Duplicate
A2	March 29, 2021		Customer	o.u.	<span>●</span>	Orange	Delete
aaaaa	July 28, 2021		Customer	o.u.	<span>●</span>	Orange	
AB bughunt II	February 19, 2021		Session	o.u.	<span>●</span>	Orange	
Abandoned Check	July 10, 2020	GSol Test edited2	Session	o.u.	<span>●</span>	Orange	
Agent Assist - Dev	September 21, 2020	Segment usedd for agent assist development	Session	o.u.	<span>●</span>	Orange	
Another external segmentation system - Hot Prospect	April 14, 2021	Journey representation of a segment from an external system	Customer	o.u.	<span>●</span>	Orange	
asdasdasdasd	February 12, 2021		Session	o.u.	<span>●</span>	Orange	
ATM - Cash Withdrawal	July 26, 2021	Describes customers who have made a cash withdrawal in an ATM session.	Session	o.u.	<span>●</span>	Purple	
ATM - Pin Changed	November 20, 2019	Describes customers who have changed their PIN in an ATM session.	Session	o.u.	<span>●</span>	Light blue	
ATM - pin incorrect	November 22, 2019		Session	o.u.	<span>●</span>	Teal	

To modify a segment, search for it and then click the **Edit** menu option. Follow the instructions in Manage segments.

## Duplicate a segment

Segments  
Group your customers by their shared characteristics or behaviors.

Create segment [Segment Reporting can be found here](#)

Name	Updated	Description	Type	Source	Active	Color	Options
30-45 Prospect Score 500+	July 28, 2021	Journey representation of an Adobe segment edited to appear in audit	Customer		<span>●</span>	Teal	
a exp segeg	April 23, 2021		Customer	o.u.	<span>●</span>	Orange	View
A1+B1	July 21, 2021	test	Customer	o.u.	<span>●</span>	Orange	Edit
A2	March 29, 2021		Customer	o.u.	<span>●</span>	Orange	Duplicate
aaaaa	July 28, 2021		Customer	o.u.	<span>●</span>	Orange	Delete
AB bughunt II	February 19, 2021		Session	o.u.	<span>●</span>	Orange	
Abandoned Check	July 10, 2020	GSol Test edited2	Session	o.u.	<span>●</span>	Orange	
Agent Assist - Dev	September 21, 2020	Segment usedd for agent assist development	Session	o.u.	<span>●</span>	Orange	
Another external segmentation system - Hot Prospect	April 14, 2021	Journey representation of a segment from an external system	Customer	o.u.	<span>●</span>	Orange	
asdasdasdasd	February 12, 2021		Session	o.u.	<span>●</span>	Orange	
ATM - Cash Withdrawal	July 26, 2021	Describes customers who have made a cash withdrawal in an ATM session.	Session	o.u.	<span>●</span>	Purple	
ATM - Pin Changed	November 20, 2019	Describes customers who have changed their PIN in an ATM session.	Session	o.u.	<span>●</span>	Light blue	
ATM - pin incorrect	November 22, 2019		Session	o.u.	<span>●</span>	Teal	
ATM - Pin incorrect	September 14, 2020	Describes customers who have entered their PIN incorrectly in an ATM session.	Session	o.u.	<span>●</span>	Orange	
atmid net 4	February 24, 2020		Session	o.u.	<span>●</span>	Blue	

To simplify the process of creating a segment, you can duplicate an existing segment. Search for the segment to duplicate and then click the **Duplicate** menu option. The duplicate segment displays in edit mode. Specify a new name for the duplicate segment and then modify the remaining information as appropriate.

## Delete a segment



**Segment Matches:** Number of visitors matched to the segment.

**Action Maps:** Number of action maps configured to use the segment.

**Outcomes Achieved:** Number of outcomes achieved for the segment.

**Active:** Indicates whether the segment is ready to match visitors on your website.

**Updated:** Date the outcome was last modified.

**Color:** Background color to use when displaying the segment name (for example, in Live Now and the Action Map Report).

**Options:** Menu of options available for the segment, such as edit, delete, and duplicate.

For more information about Journey Segments, see the Journey Segments view in the Genesys Cloud CX Resource Center.

# Manage segments

## Contents

- [1 Select segment type](#)
- [2 Create or edit a segment](#)
- [3 Visitor attributes](#)
- [4 Visitor journey session types](#)
- [5 Visitor journey attributes](#)
- [6 Related articles](#)

Learn how to manage segments that identify and classify visitors based on their shared behavior and characteristics.

### Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Segment > Add , Delete, Edit, View**

### Select segment type

Select Segment Type

**Session Segment**  
Assign this segment to a sequence of customer activity, such as a web visit

**Customer Segment**  
Assign this segment to a customer profile

Cancel Create

**Feature coming soon:** Customer segments

If you are creating a segment, specify whether to create a session or customer segment. A session segment expires when the single session ends. A customer segment persists across sessions.

### Create or edit a segment

## Manage segments

Journey > Segments > Create segment Cancel Save Save and close

### Session Segment

Group customers by their shared characteristics or behaviours

**Name \***

**Description**

**Define segment conditions \*** At least one condition must be defined

---

**Visitor attributes**  
For example, identify all visitors from Canada or who use Google Chrome

Add first attribute

---

**Visitor journey**  
For example, all visitors who come to your Home page or purchase something on your website

Add first event

---

**Segment display color** Preview

Orange ↓ Orange

---

**Display to Agent**

Yes

---

**Active**

Yes

To simplify the process of creating a segment, you can duplicate an existing segment.

### Important

- If you are creating a session segment, you must specify at least one condition.
- If you specify multiple conditions, the segment matches a visitor only when all the conditions match.
- To create a segment after you reach the 500 segment limit, delete an existing segment.

Entity	Description
Name	Descriptive name of the segment.
Description	(Optional) Description of the segment.
Visitor attributes	Attributes that identify visitors based on characteristics such as location, browser, or device type.
Visitor journey	Attributes that identify visitors based on their shared behaviors. For example, completing a form or going to a specific webpage.
Session type	Session type for grouping data about a visitor's activities.
Segment display color	Background color to use when displaying the segment name (for example, in Live Now and the Action Map Report).
Display to Agent	<p>Session segments display to agents by default. Agents can see when Genesys Predictive Engagement matches visitors to a segment. However, not all segments are relevant to all agents. For example, a segment that matches based on a visitor's search for a specific product that an agent does not support. Or, a segment that matches based on sensitive personal data or data that an agent should not see because of privacy restrictions. To prevent agents from seeing a segment, slide the toggle to <b>No</b>.</p> <div data-bbox="824 1060 1380 1186" style="border: 1px solid #ccc; padding: 5px;"> <p><b>Important</b></p> <p>Segments that don't display to agents appear in Live Now and reports. The segments can also trigger action maps. These segments remain in a customer's record.</p> </div>
Active	<p>Segments are active by default. When a segment is active, it is ready to match visitors on your web site.</p> <p>To deactivate a segment temporarily from matching, slide the toggle to <b>No</b>. To remove a segment permanently, delete it.</p>

## Visitor attributes

**Visitor attributes**

For example, identify all visitors from Canada or who use Google Chrome

For more information about visitor attribute operators, see operators.

For more information about visitor attributes that enable UTM-tracking of campaign-specific activities, see Campaign attributes.

**Important**

The system doesn't validate free form text. If you misspell a value, the segment doesn't trigger. For example, typing "moble" instead of "mobile" as the device category.

Attribute name	Description	Examples
Device category	Category of device that the visitor is using.	desktop mobile other tablet
Device type	Type of device that the visitor is using.	Apple Archos Asus Google HTC Huawei Nokia Samsung SUN Microsystems Unknown
OS family	Operating system family that the visitor is using.	Android Chrome OS

Attribute name	Description	Examples
		Firefox OS Google iOS Linux Mac OS Tizen Unknown Windows 9x Windows CE Windows NT Windows Phone Ubuntu
Browser family	Browser family that the visitor is using, including all versions of the browser within that family.	Chrome Firefox HTC_HD2_T8585 Opera IE Mobile Internet Explorer Opera Safari SamsungBrowser Viera
Browser version	Major version of the browser that the visitor is using.	55
Campaign source*	A search engine, newsletter, or other source (UTM parameter).	direct adWords Google
Campaign medium*	Medium such as email or cost-per-click (UTM parameter).	direct organicsocialppcwebsite-ppc
Campaign name*	Specific product promotion or strategic campaign (UTM parameter).	test campaign Summer19
Campaign term*	Keywords for this ad (UTM parameter).	device trialsubscription
Campaign content*	Ads or links that point to the	

Attribute name	Description	Examples
	same URL (UTM parameter).	
Campaign Click ID*	Unique number that generates when a potential customer clicks an affiliate link (UTM parameter).	CjwKCAiA1ZDiBRAXEiwAIWyNC2J6QZBJYwXHJPSZ khECGKaZ7nRjmNEQzmn1Hqh8Labvn3FQ-Tn1pRoCEDYQAvD_BwE
Campaign network*	Ad network to which the click ID belongs (UTM parameter).	search network display network
Country	Visitor's country.	United States
City	Visitor's city or town.	Chicago
Region	Visitor's region. To track by U.S. states, supply the 2-digit state code (all caps).	Midwest IN
Post code	Visitor's postal code.	60610
CCA2 code	Two-letter country code.	US
Browser language code	Language to which the visitor's browser is set.	en-gb Standard browser language codes
Organization name	Organization name derived from the IP.	alto-universal.com
Referral URL	Referrer page URL.	https://alto-universal.com/auto#quote-details
Referral hostname	Referrer host or hostname.	alto-universal.com

## Visitor journey session types

### Visitor journey

For example, all visitors who come to your Home page or purchase something on your website

### Session type

For more information about web session, see [Web sessions](#).

Session type	Example	Example events in the session
Web	A user goes to your website and completes a form to place an online order.	1. Go to the website.

Session type	Example	Example events in the session
		<ol style="list-style-type: none"><li>2. Go to the online order form.</li><li>3. Complete the form.</li><li>4. Submit the form.</li></ol>

## Visitor journey attributes

### Visitor journey

For example, all visitors who come to your Home page or purchase something on your website

#### Session type

Web

#### Event details

is\_first\_visit  

Page URL equals https://www.genesys.com/ ✓ ✕

Select one equals  ✓ ✕

+ add detail

Add next event

When you define a condition that includes a visitor journey attribute, Genesys Predictive Engagement matches visitors based on whether they take the action. For example, visitors who complete a form, go to a specific webpage, or add a product to their shopping cart but don't complete the purchase.

For more information about visitor journey attribute operators, see operators.

### Important

To track a more complex visitor journey, define multiple conditions. Genesys Predictive Engagement evaluates all conditions in the visitor journey sequentially, in the order that you define them.

## Important

- The system doesn't validate free form text. If you misspell a value, the segment doesn't trigger. For example, typing "ACB Retailer" when the page title is "ABC Retailer".
- When specifying time for a custom web event, include milliseconds.
- When specifying numeric values for a custom web event, only numeric relational operators are available. For example, say you have a custom event called "CartValue" and you want to target all customers who have a cart value of \$100 or more. You would select the "greater than or equal to" operator and type **100** in the value box. **Note:** You can include decimal points but not the currency symbol.

Attribute name	Description	Example
autotrackClick	To track when and where a visitor clicks on a webpage. For more information, see autotrackClick.	Clicks 'More' button.
Custom attribute	Allows you to identify groups of visitors based on characteristics and behaviors that are specific to your business.	packageDeliveryStatus
Event name	Represents actions that occur on your website. For example, object clicked (such as a button, link, or menu option), error generated, inactivity detected, URL changed, or scroll detected.  For more information about configuring events, see About modules.	The recommended format is object_action.  <ul style="list-style-type: none"> <li>• button_click</li> <li>• link_click</li> <li>• page_scroll</li> <li>• key_press</li> <li>• textbox_entry</li> </ul>
form:track	To track the value of webpage form submissions. For more information, see forms:track.	sign-up-form
Page URL	URL of the page. Full protocol required.	https://www.genesys.com/?s&q=predictive%20e
Page title	Meta title of the page (not the heading on the page).	Contact Us
Page hostname	Host name of the page's URL.	app.genesys.cloud
Page domain	Domain of the page's URL.	app.genesys.cloud
Page fragment	Fragment of the page's URL, sometimes called a named anchor. It usually appears at the end of a URL and begins with a hash (#) character followed by	#/journey/segment/create

## Manage segments

	the identifier.	
Page keywords	Keywords from the HTMLtag of the page.	contact
Page pathname	Path name of the page.	/journey/admin/
Search query	Represents the keywords in a visitor's search query.	test
URL query string	Query string that passes to the page in the current event.	q=test

## Related articles

- Custom attributes
- Operators
- About segments

Journey > Segments > Mortgage Applicant Cancel Save Save and close

**Segment Source**  
Adobe Experience Platform

**Segment Name**  
Mortgage Applicant

**Segment ID**  
6a090451-c184-4b9c-85fa-4f76c2f59699

**Name \***

**Description**

**Segment display color** Preview  
 Mortgage Applicant

**Display to Agent**  
 No

**Active**  
 Yes

### AI-318 Edit segments from third-party system

New section for AI-318.

Your organization can create segments in a third-party system (such as Adobe Experience Platform, Segment.io, Tealium AudienceStream, Emarsys, or Pega) and use the segments in Predictive Engagement. The only segment information that you can edit in Predictive Engagement is the Predictive Engagement-related information. Any segment information that you change in Predictive Engagement does not update in your third-party system.

For more information about including segments from a third-party system, see </api/v2/journey/segments> in the Genesys Cloud CX Developer Tools.

### AI-318 Add sentence

Add the following sentence to the "Create or edit a segment" section when AI-318 releases:

To edit a segment from a third-party system, see [Edit segments from third-party system](#).

Entity	Description
Segment Source	Third-party system where your organization created the segment.
Segment Name	Name of the segment in your third-party system.
Name	Descriptive name of the segment in Predictive Engagement. Changing this name does not change the segment name in the third-party system.
Description	(Optional) Description of the segment in Predictive Engagement.
Segment display color	Background color to use when displaying the segment name (for example, in Live Now and the Action Map Report).
Display to Agent	<p>This feature isn't available for segments from a third-party system.</p> <div style="border: 1px solid #ccc; background-color: #fff9e6; padding: 5px; margin-top: 10px;"> <p><b>Important</b></p> <p>Segments that don't display to agents appear in Live Now and reports. The segments can also trigger action maps. These segments remain in a customer's record.</p> </div>
Active	<p>Segments are active by default. When a segment is active, it is ready to match visitors on your web site.</p> <p>To deactivate a segment temporarily from matching, slide the toggle to <b>No</b>. To remove a segment permanently, delete it.</p>

## Manage segments

---

**Name \***

**Description**

**Define segment conditions \*** At least one condition must be defined

---

**Visitor attributes**  
For example, identify all visitors from Canada or who use Google Chrome

---

**Visitor journey**  
For example, all visitors who come to your Home page or purchase something on your website

---

**Segment expiration**  
Define how long this segment will stay assigned to a customer profile.

---

**Segment display color**      **Preview**

↓      

---

**Display to Agent**  
 No

---

**Active**  
 Yes

AI-317 Replace screen capture and edit table in "Create or edit a segment" section

Entity	Description
Segment expiration	For <b>customer segments only!</b>

Entity	Description
	<p>This feature isn't available for session segments. Number of days that the segment remains assigned to a customer profile before the segment assignment expires. The minimum number of days that you can assign is 2 and the maximum number of days is 60. Segment expiration only applies to segments that you assign <b>after</b> you set the expiration days. Segment expiration does not apply to segments that you assigned before setting the expiration days.</p>
<p>Display to Agent</p>	<p><b>For session segments only!</b></p> <p>This feature isn't available for customer segments. Session segments display to agents by default. Agents can see when Genesys Predictive Engagement matches visitors to a segment. However, not all segments are relevant to all agents. For example, a segment that matches based on a visitor's search for a specific product that an agent does not support. Or, a segment that matches based on sensitive personal data or data that an agent should not see because of privacy restrictions.</p> <p>To prevent agents from seeing a segment, slide the toggle to <b>No</b>.</p> <div style="border: 1px solid #ccc; background-color: #fff9e6; padding: 5px;"> <p><b>Important</b></p> <p>Segments that don't display to agents appear in Live Now and reports. The segments can also trigger action maps. These segments remain in a customer's record.</p> </div>

AI-23 Add to "Create or edit a segment" section

For more information about the number of segments that you can create for your organization, see [Limits for Genesys Predictive Engagement objects](#).

(Adding the link to the [Object\\_limits](#) article causes the article not to save. So, add it at publication time.)

# About outcome predictions and probabilities

Genesys Predictive Engagement uses AI-powered machine learning to predict the probability of visitors achieving your unique business outcomes.

## Contents

- [1 Outcome score prediction](#)
- [2 Create outcomes](#)
- [3 Attribute and operators](#)
- [4 Use outcomes in an action map](#)
- [5 View outcome scores](#)

## Outcome score prediction

When visitors come to your website, Genesys Predictive Engagement tracks how they navigate your website and complete web-based forms. Genesys Predictive Engagement uses AI and machine learning to analyze the traffic on your website to identify patterns of behavior. Based on these patterns, Genesys Predictive Engagement determines the probability, or likelihood of a visitor completing an outcome.

- Predicting outcome scores
  - How Predictive Engagement gathers outcome probability data
  - Start training your prediction models
  - Ongoing model training
  - Improve your predictions
- 

## Create outcomes

To allow Genesys Predictive Engagement to predict visitor behavior, define your business goals as outcomes.

- Search for and view your outcomes
  - Manage outcomes
  - Duplicate an outcome
  - Delete an outcome
- 

## Attribute and operators

When you create an outcome, you specify the conditions that make it possible. To specify the conditions, define an expression that includes an attribute and an operator.

- About attributes
  - Operators
- 
-

## Use outcomes in an action map

After you create an outcome, you can configure an action map to trigger based on the probability of a visitor achieving it.

- Create an action map
  - Configure an outcome probability
- 

## View outcome scores

You can see the outcome scores for users changing in real time in Live Now.

- View outcomes scores in Live Now
  - View outcome metrics
  - View outcome report
-

# Outcomes overview

## Contents

- [1 Predicting outcome scores](#)
- [2 AI-148 Outcome score updates](#)
- [3 How Genesys Predictive Engagement gathers outcome probability data](#)
- [4 Start training your models](#)
- [5 Ongoing training](#)
- [6 Improve predictions](#)
- [7 Predict based on custom events](#)
  - [7.1 Questions](#)

Genesys Predictive Engagement's AI-powered outcome scoring service learns to predict your business outcomes using machine learning models that are unique to your business.

## Predicting outcome scores

Genesys Predictive Engagement uses AI to predict whether a visitor will achieve a particular business objective. These business objectives are called **outcomes**. For each outcome you define, there is a machine learning model that evaluates a visitor's behavior against the behavior of other visitors on your website to determine the visitor's outcome score. Your organization's models are unique to you.

Each outcome score represents the likelihood that the visitor will achieve the particular business outcome, based on the actions the visitor has taken so far during the session or on other activities related to the visitor that are included in the appropriate events (for example, geolocation).

The model updates a visitor's score for each outcome in real-time, and a visitor's scores can change as they navigate your website.

If a visitor communicates with an agent, the agent can see the visitor's outcome scores while viewing the visitor's complete set of journey context data. Also, the outcome scores can trigger action maps that enhance a visitor's engagement on your site.

### Important

Because our internal service handles the training and deployment of models, it is not possible to deploy customer-specific models with Genesys Predictive Engagement. Our team investigates and integrates new algorithms into the scoring service based on customer use cases.

## How Genesys Predictive Engagement gathers outcome probability data

Genesys Predictive Engagement monitors all the ways that visitors arrive on and interact with your webpages. For example, if you are an e-commerce site, Genesys Predictive Engagement tracks how visitors navigate your website and place items in their shopping cart as they proceed to the checkout page.

### Important

- How a visitor achieves a certain probability score is unique to your business and website.
- Outcome scores and the associated data science are scored in a GDPR-compliant manner. Predictive Engagement's data scientists work exclusively on anonymized GDPR-compliant data.

For more information, see [About the data we track](#).

## Start training your models

Each of your machine learning models require training before they can make predictions.

To start the training:

1. Create an outcome.
2. Have visitors use your tracked website. To verify user activity, use [Live Now](#).

After you complete these steps, the model training begins automatically within 24 hours. The training process completes and the model is ready to work before the start of the next business day.

### Important

Initially, you see only a green bar with a check next to it in the **Outcome Scores** section. This bar indicates that the outcome condition was met. You see outcome scores after your model is trained.

## Ongoing training

The model training process is fully automated. You do not need a data scientist to start, monitor, or maintain the training. Your model is retrained nightly using the last 30 days of your user data. Also, your model is evaluated periodically and retrained on fresh data.

While the model is undergoing retraining, outcome scores are predicted using the previously trained version of the model. During the training process, agents can continue working as normal.

Your newly trained model is tested to ensure that it performs better than the previous version in terms of its precision and recall. If the new model does not work at least as well as the previous model, the previous model is reinstated until more data is gathered. Historical models are not retained.

### Important

- When you add a new outcome, your model training accounts for it automatically.
- Automated model training and predictions are performed on the original customer journey events, which are not anonymized and generally contain PII.

## Improve predictions

In general, the longer your models run and the more data they evaluate, the better their predictions are.

The best way to improve a model's predictions is to increase the number of achieved outcomes. In general, your dataset should contain several hundred positive examples for your model to be adequately trained to make reliable predictions.

Other factors can affect the accuracy of your model's performance, including:

- Total number of visitor journeys recorded
- Frequency that an outcome occurs in the data
- Richness of events that the visitor produces

### Tip

You can exclude IP addresses to prevent events generated internally from influencing your models.

# View outcomes

## Contents

- [1 View outcomes list](#)
- [2 Search for outcomes](#)
- [3 Create an outcome](#)
- [4 Edit an outcome](#)
- [5 Duplicate an outcome](#)
- [6 Delete an outcome](#)
- [7 View outcome report](#)

Learn how to search for, create, edit, duplicate, and delete outcomes.

### Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Outcome >Add , Delete, Edit, View**

## View outcomes list

Outcomes  
Identify the business objectives you want to track.

[Create outcome](#) [Outcome Reporting can be found here](#)

Name	Updated	Description	Active	Options
<a href="#">a segment-COPY1cvxdf</a>	July 19, 2021	hj	<span style="color: green;">●</span>	⋮
<a href="#">claire incorrect test</a>	March 16, 2021		<span style="color: grey;">●</span>	⋮
<a href="#">claire incorrect test-COPYwss</a>	July 19, 2021		<span style="color: grey;">●</span>	⋮
<a href="#">eamonn-an-outcome-to-test</a>	July 5, 2021		<span style="color: green;">●</span>	⋮
<a href="#">edisa</a>	July 16, 2021	asassac	<span style="color: green;">●</span>	⋮
<a href="#">eoin's test</a>	July 23, 2021	test outcome	<span style="color: green;">●</span>	⋮
<a href="#">Josh's test outcome (feel free to delete)</a>	June 21, 2021	Testing outcome limits	<span style="color: green;">●</span>	⋮
<a href="#">Made Payment</a>	December 8, 2020	Visitor paid for insurance.	<span style="color: green;">●</span>	⋮
<a href="#">marks demo outcome</a>	May 11, 2021		<span style="color: green;">●</span>	⋮
<a href="#">MarksOutcomeForSuccess</a>	July 2, 2019	This outcome is based on canadian customers who do the thing that triggers the sdk call with an event attribute 'didTheThingWantedThemToDo' which is fired from visiting the hidden search winner page.	<span style="color: green;">●</span>	⋮
<a href="#">my big test</a>	April 15, 2021		<span style="color: green;">●</span>	⋮

**Name:** Outcome name.

**Updated:** Date the outcome was last modified in Predictive Engagement.

**Description:** Outcome description.

**Active:** Indicates whether the outcome is ready to use on your website.

**Options:** Menu of options available for the outcome, such as edit, delete, and duplicate.

## Search for outcomes

## View outcomes

Outcomes  
Identify the business objectives you want to track.

[Create outcome](#) [Outcome Reporting can be found here](#)

Q Search

Name	Updated	Description	Active	Options
a segment-COPY1cvadf	July 19, 2021	hj	●	⋮
claire incorrect test	March 16, 2021		●	⋮
claire incorrect test-COPYwssa	July 19, 2021		●	⋮
eamonn-an-outcome-to-test	July 5, 2021		●	⋮
edssa	July 16, 2021	esasscsc	●	⋮
eoin's test	July 23, 2021	test outcome	●	⋮
Josh's test outcome (feel free to delete)	June 21, 2021	Testing outcome limits	●	⋮
Made Payment	December 8, 2020	Visitor paid for insurance.	●	⋮
marks demo outcome	May 11, 2021		●	⋮
MarksOutcomeForSuccess	July 2, 2019	This outcome is based on canadian customers who do the thing that triggers the sdk call with an event attribute 'didTheThingWantedThemToDo' which is fired from visiting the hidden search winner page.	●	⋮
my big test	April 15, 2021		●	⋮

Type one or more characters (not case-sensitive) for which to search. As you type, only the outcomes that match your criteria appear in the list.

A column heading with an arrow indicates that you can click the arrow to sort the list by that entity. An upward-pointing arrow indicates that the list is in ascending order and a downward-pointing arrow indicates that the list is in descending order.

## Create an outcome

Outcomes  
Identify the business objectives you want to track.

[Create outcome](#) [Outcome Reporting can be found here](#)

Q Search


Name	Updated	Description	Active	Options
a segment-COPY1cvadf	July 19, 2021	hj	●	⋮
claire incorrect test	March 16, 2021		●	⋮
claire incorrect test-COPYwssa	July 19, 2021		●	⋮
eamonn-an-outcome-to-test	July 5, 2021		●	⋮
edssa	July 16, 2021	esasscsc	●	⋮
eoin's test	July 23, 2021	test outcome	●	⋮
Josh's test outcome (feel free to delete)	June 21, 2021	Testing outcome limits	●	⋮
Made Payment	December 8, 2020	Visitor paid for insurance.	●	⋮

To create an outcome, click **Create outcome** and then follow the instructions in Manage outcomes.

### Important


Starting on June 14, 2021, you can no longer create more than 10 outcomes. For more information, see Outcome limitation change.

## Edit an outcome

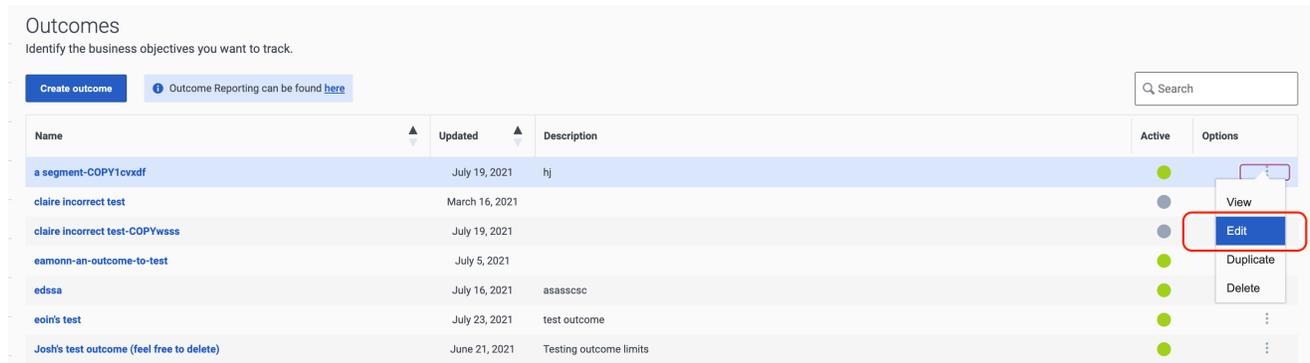

To modify an outcome, search for it and then click the **Edit** menu option. Follow the instructions in [Manage outcomes](#).

## Duplicate an outcome

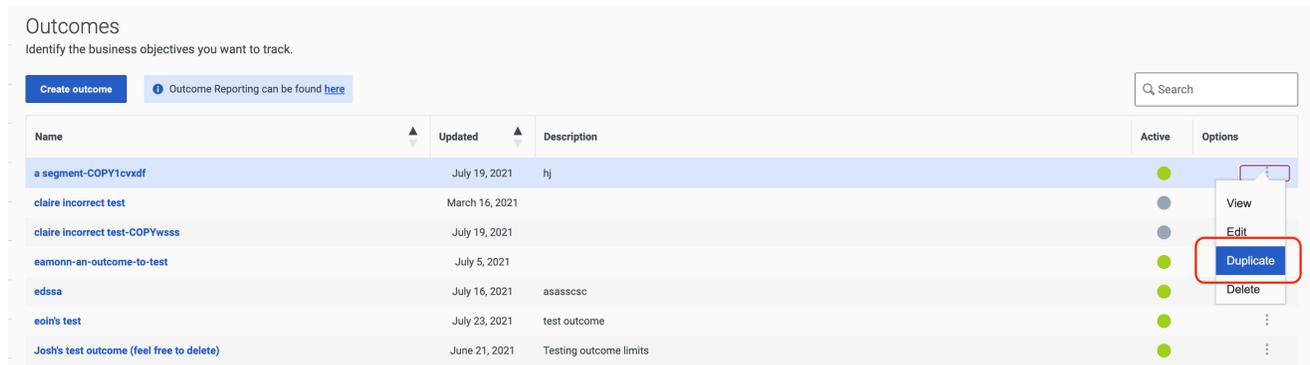

To simplify the process of creating an outcome, you can duplicate an existing outcome. Search for the outcome to duplicate and then click the **Duplicate** menu option. The duplicate outcome displays in edit mode. Specify a new name for the duplicate outcome and then modify the remaining information as appropriate.

### Important

Genesys Predictive Engagement scores the new outcome independently from the original outcome based on visit data gathered after you save and activate the new outcome. If you edit any of the conditions for the outcome, click the **checkmark** for each changed condition before you save the outcome.

## Delete an outcome

Outcomes  
Identify the business objectives you want to track.

[Create outcome](#) [Outcome Reporting can be found here](#)

Name	Updated	Description	Active	Options
a segment-COPY1cvxdf	July 19, 2021	hj	●	View Edit Duplicate Delete
claire incorrect test	March 16, 2021		●	⋮
claire incorrect test-COPYwsss	July 19, 2021		●	⋮
eamonn-an-outcome-to-test	July 5, 2021		●	⋮
edssa	July 16, 2021	asasscsc	●	⋮
eoin's test	July 23, 2021	test outcome	●	⋮
Josh's test outcome (feel free to delete)	June 21, 2021	Testing outcome limits	●	⋮

To delete an outcome permanently, search for the outcome, click the **Delete** menu option, and then confirm.

### Important

Deletion is permanent. To suspend the outcome from use temporarily, deactivate it instead.

## View outcome report

Outcomes  
Identify the business objectives you want to track.

[Create outcome](#) [Outcome Reporting can be found here](#)

Name	Updated	Description	Active	Options
a segment-COPY1cvxdf	July 19, 2021	hj	●	⋮
claire incorrect test	March 16, 2021		●	⋮
claire incorrect test-COPYwsss	July 19, 2021		●	⋮
eamonn-an-outcome-to-test	July 5, 2021		●	⋮
edssa	July 16, 2021	asasscsc	●	⋮
eoin's test	July 23, 2021	test outcome	●	⋮
Josh's test outcome (feel free to delete)	June 21, 2021	Testing outcome limits	●	⋮
Made Payment	December 8, 2020	Visitor paid for insurance.	●	⋮
marks demo outcome	May 11, 2021		●	⋮
MarksOutcomeForSuccess	July 2, 2019	This outcome is based on canadian customers who do the thing that triggers the sdk call with an event attribute 'didTheThing/WantedThemToDo' which is fired from visiting the hidden search winner page.	●	⋮
my big test	April 15, 2021		●	⋮

To learn how well you are engaging specific segments of visitors, click the **Outcome Reporting can be found here** menu option.

## View outcomes

---

<b>Entity</b>	<b>Description</b>
Name	Outcome name.
Action Maps	Number of action maps that have assisted in an outcome achievement.
Achieved	Number of times that the outcome was achieved.
Achieved w/ Action	Number of outcomes achieved that were associated to a web action (such as, web chat or content offer).
Achieved w/ Action %	Percent of actions that achieved the outcome (Achieved with Action / number of actions).
Segments	Number of segments that achieved the outcome.
Active	Indicates whether the outcome is ready to use on your web site.
Updated	Date the outcome was last modified.

For more information about Journey Outcomes, see the Journey Outcomes view in the Genesys Cloud CX Resource Center.

# Manage outcomes

## Contents

- [1 Create or edit an outcome](#)
- [2 Visitor attributes](#)
- [3 Visitor journey attributes](#)
- [4 Related articles](#)

Learn how to define the business goals that you want to track and predict.

### Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Outcome > Add , Delete, Edit, View**

To simplify the process of creating an outcome, duplicate an existing outcome.

### Important

- You must specify as least one condition.
- Starting on June 14, 2021, you can no longer create more than 10 outcomes. To create an outcome after you reach the outcome limit, delete an existing outcome. For more information, see Outcome limitation change.

## Create or edit an outcome

Entity	Description
<b>Outcome Details</b>	
Name	Descriptive name of the outcome.
Description	(Optional) Description of the outcome.
Status	Outcomes are active by default. When an outcome is active, it is ready to use on your web site. To deactivate an outcome temporarily, slide the toggle to <b>No</b> . To remove an outcome permanently, delete it instead.
<b>Define your outcome conditions</b>	
Session type	Select the type of session:

Entity	Description
	<ul style="list-style-type: none"> <li>Web session: An example of a web session is when a user goes to your website and completes a form to place an online order. The associated events for the web session are: visitor visiting a website, visitor filling out the online order form, and visitor submitting the form. For more information, see Web sessions.</li> </ul>
First event	Attributes that identify visitors based on shared behaviours. For example, completing a form or going to a specific webpage.
Assign value to first event	<p>When you create an outcome, you can attach a perceived value to quantify the benefit of the specified outcome. For example, you can derive the value of an abandoned cart by creating an outcome. In the Value field, provide a value to be extracted from the outcome that you are tracking. Currently, only numeric value types are supported.</p> <p>Important You can assign a value only to the event you added last. For example, if define a series of three events to achieve your outcome, you can assign a value only to the third event.</p>
<b>Define your visitor characteristics</b>	
Visitor attributes	Attributes that identify visitors based on characteristics such as location, browser, or device type

## Visitor attributes

### Visitor attributes

For example, identify all visitors from Canada or who use Google Chrome

Device categ... ▾

equals ▾

tablet

✓

✕

Select one ▾

equals ▾

✓

✕

Add next attribute

For more information about visitor attribute operators, see operators.

For more information about visitor attributes that enable UTM-tracking of campaign-specific activities, see Visitor attributes.

### Important

The system doesn't validate free form text. If you misspell a value, the segment doesn't trigger. For example, typing "moble" instead of "mobile" as the device category.

Attribute name	Description	Examples
Device category	Category of device that the visitor is using.	desktop mobile other tablet
Device type	Type of device that the visitor is using.	Apple Archos Asus Google HTC Huawei Nokia Samsung SUN Microsystems Unknown
OS family	Operating system family that the visitor is using.	Android Chrome OS Firefox OS Google iOS Linux Mac OS Tizen Unknown Windows 9x Windows CE Windows NT Windows Phone Ubuntu
Browser family	Browser family that the visitor is	Chrome

Attribute name	Description	Examples
	using, including all versions of the browser within that family.	Firefox HTC_HD2_T8585 Opera IE Mobile Internet Explorer Opera Safari SamsungBrowser Viera
Browser version	Major version of the browser that the visitor is using.	55
Campaign source*	A search engine, newsletter, or other source (UTM parameter).	direct adWords Google
Campaign medium*	Medium such as email or cost-per-click (UTM parameter).	direct organicsocialppcwebsite-ppc
Campaign name*	Specific product promotion or strategic campaign (UTM parameter).	test campaign Summer19
Campaign term*	Keywords for this ad (UTM parameter).	device trialssubscription
Campaign content*	Ads or links that point to the same URL (UTM parameter).	
Campaign Click ID*	Unique number that generates when a potential customer clicks an affiliate link (UTM parameter).	CjwKCAiA1ZDiBRAXEiwAIWyNC2J6QZBJYwXHJPsz khECGKaZ7nRjmNEQzmn1Hqh8Labvn3FQ-Tn1pRoCEDYQAvD_BwE
Campaign network*	Ad network to which the click ID belongs (UTM parameter).	search network display network
Country	Visitor's country.	United States
City	Visitor's city or town.	Chicago
Region	Visitor's region. To track by U.S. states, supply the 2-digit state code (all caps).	Midwest IN
Post code	Visitor's postal code.	60610
CCA2 code	Two-letter country code.	US
Browser language code	Language to which the visitor's	en-gb

Attribute name	Description	Examples
	browser is set.	Standard browser language codes
Organization name	Organization name derived from the IP.	alto-universal.com
Referral URL	Referrer page URL.	https://alto-universal.com/auto#quote-details
Referral hostname	Referrer host or hostname.	alto-universal.com

## Visitor journey attributes

When you define a condition that includes a visitor journey attribute, Genesys Predictive Engagement matches visitors based on whether they take the action. For example, visitors who complete a form, go to a specific webpage, or add a product to their shopping cart but don't complete the purchase.

For more information about visitor journey attribute operators, see operators.

### Important

To track a more complex visitor journey, define multiple conditions. Genesys Predictive Engagement evaluates all conditions in the visitor journey sequentially, in the order that you define them.

### Important

- The system doesn't validate free form text. If you misspell a value, the segment doesn't trigger. For example, typing "ACB Retailer" when the page title is "ABC Retailer".
- When specifying time for a custom web event, include milliseconds.
- When specifying numeric values for a custom web event, only numeric relational operators are available. For example, say you have a custom event called "CartValue" and you want to target all customers who have a cart value of \$100 or more. You would select the "greater than or equal to" operator and type **100** in the value box. **Note:** You can include decimal points but not the currency symbol.

Attribute name	Description	Example
autotrackClick	To track when and where a visitor clicks on a webpage. For more information, see autotrackClick.	Clicks 'More' button.
Custom attribute	Allows you to identify groups of	packageDeliveryStatus

	visitors based on characteristics and behaviors that are specific to your business.	
Event name	<p>Represents actions that occur on your website. For example, object clicked (such as a button, link, or menu option), error generated, inactivity detected, URL changed, or scroll detected.</p> <p>For more information about configuring events, see About modules.</p>	<p>The recommended format is object_action.</p> <ul style="list-style-type: none"> <li>• button_click</li> <li>• link_click</li> <li>• page_scroll</li> <li>• key_press</li> <li>• textbox_entry</li> </ul>
form:track	To track the value of webpage form submissions. For more information, see forms:track.	sign-up-form
Page URL	URL of the page. Full protocol required.	https://www.genesys.com/?s&q=predictive%20e
Page title	Meta title of the page (not the heading on the page).	Contact Us
Page hostname	Host name of the page's URL.	app.genesys.cloud
Page domain	Domain of the page's URL.	app.genesys.cloud
Page fragment	Fragment of the page's URL, sometimes called a named anchor. It usually appears at the end of a URL and begins with a hash (#) character followed by the identifier.	#/journey/segment/create
Page keywords	Keywords from the HTMLtag of the page.	contact
Page pathname	Path name of the page.	/journey/admin/
Search query	Represents the keywords in a visitor's search query.	test
URL query string	Query string that passes to the page in the current event.	q=test

## Related articles

- Custom attributes
- Operators
- About outcomes

# About action maps

Learn how to create action maps that use different types of actions to enhance and extend a visitor's journey.

## Contents

- [1 Overview and best practices](#)
- [2 Create an action map](#)
- [3 Trigger an action map](#)
- [4 Attributes and operators](#)
- [5 Select an action](#)
- [6 Define outcome probabilities](#)
- [7 Apply to webpages](#)
- [8 Route the action map](#)
- [9 Schedule group](#)
- [10 Override global frequency capping](#)
- [11 Prioritize the action maps](#)
- [12 Maintain action maps](#)
- [13 Monitor action maps](#)

### Overview and best practices

Improve your action maps by reviewing the overall process for creating them and our suggested best practices.

- Action maps overview
  - Best practices
  - Video: Create an action map that offers a proactive chat
- 

### Create an action map

Learn how to create and manage your action maps. Action maps work on desktop applications and mobile devices.

- Create an action map
- 

### Trigger an action map

Configure an action map to trigger based on segment match, outcome probability, and/or visitor activity. Use the audience size estimator to understand the potential reach based on the segments and the outcome probability you set.

- About triggers
  - Audience size estimator
  - Trigger based on segment match
  - Trigger based on outcome probability
  - Trigger based on user activity
- 

### Attributes and operators

When you create an action map, you specify the conditions that make it possible. To specify the

---

---

## About action maps

---

conditions, define an expression that includes an attribute and an operator.

- About attributes
  - Operators
- 

## Select an action

Select and configure the action for the action map to use to engage your visitors.

- About actions
  - Web messaging
  - Web chat
  - Content offer
  - Architect flow
- 

## Define outcome probabilities

Predictive Engagement uses AI to predict the actions that your visitors will take. Help refine its modeling by identifying outcome probabilities.

- Manage outcomes
  - Trigger an action map based on outcome probability
- 

## Apply to webpages

An action map can trigger on any page where you use Genesys Predictive Engagement to track visitor activity. When you build an action map that uses a web action, identify the webpages where you want the offer to appear. You can also specify pages where you don't want the offer to appear.

- Apply an action map to specific webpages
  - OR conditions
  - AND conditions
- 
-

## Route the action map

Configure how Genesys Predictive Engagement routes visitors who respond to a web action and who are ready to work with an agent or sales representative directly.

- Route an action map to an agent queue
- 

## Schedule group

For an action map that offers a web chat, you can select a schedule group to designate when agents are available. Genesys Predictive Engagement offers chats only when agents are available to connect with visitors who accept the chat offers.

- Overview
  - Schedules
- 

## Override global frequency capping

If frequency capping for web engagements is configured at the global level, you can override it for an individual action map.

- Override global frequency capping settings
- 

## Prioritize the action maps

Multiple action maps can trigger on a webpage. To ensure that Genesys Predictive Engagement picks the most appropriate one, configure the priority for each action map.

- Prioritize an action map
- 

## Maintain action maps

Genesys Predictive Engagement provides several features for maintaining action maps.

- Search
- 
-

## About action maps

---

- Duplicate
  - Edit
  - Delete
- 

## Monitor action maps

Use analytics to assess the effectiveness of your action maps.

- Action map performance report
  - View action map metrics
  - View action maps report
-

# Action maps overview

## Contents

- [1 Actions](#)
- [2 Qualified action maps](#)
- [3 Offered action maps](#)
- [4 Best practices](#)

An action map represents the steps that Genesys Predictive Engagement takes to achieve a particular business result.

## Actions

For each action map, you must select its action.

- Some action maps use web actions. Web actions engage with a visitor directly. For example, you can create an action map that presents a web chat to visitors who go to a particular page for your current promotional campaign. The chat might ask the visitor whether they want to speak directly with someone in sales, who could then help them complete their purchase.
- Some action maps, such as Architect flows, use actions that react to visitor behavior, but do not interact with a visitor directly.

## Qualified action maps

### Feature coming soon: Customer segments

When you create an action map, you define its trigger. The trigger determines when the action map is "qualified." When an action map is qualified, it means that Genesys Predictive Engagement could offer the action, depending on the other offer-related conditions.

An individual action maps can qualify only once for each session. If multiple action maps qualify during a given session, the number of actions that are offered depend upon the offer conditions, specifically the frequency capping settings.

The types of triggers that you can define are:

- Who the visitor is (what group or segment the visitor belongs to)
- What actions the visitor takes on your website (for example, searches for something or visits a specific page)

## Offered action maps

The following considerations determine whether a qualified action map gets offered to a visitor:

- **Priority:** The action map's priority determines which action map is offered in the event that multiple action maps are qualified for a visitor.

- **URL:** For web-based actions (web chats, web messaging, and content offers), you can apply an action map to specific webpages.
- **Timing:** When you select the action for an action map, you specify when the action works.
- **Schedule:** For action maps that offer web chats, you can select a schedule that indicates when the contact center is open to interact with visitors.
- **Activation status:** An action must be active for it to work.

## Best practices

When you design action maps, consider the following points:

- If a visitor is progressing toward a business outcome, do not impede their progress by popping a chat window unnecessarily. Intervene only when a visitor's activity indicates that they are no longer on track to achieve the outcome that you want. To prevent this occurrence, use the drop in outcome scoring probability.
- Configure searching on your site to use the site search settings.
- Genesys Predictive Engagement tracks when a visitor does any of the following:
  - Completes fields in a form
  - Searches for something
  - Responds to a chat offer
  - Does not respond to a chat offer
  - Responds to a chat offer initially but then remains inactive until the offer times out
- Genesys Predictive Engagement can also track custom web events that you define. Then, you can configure the action map to trigger when one of these custom web events occurs. For example, you can implement a custom web event to track a visitor who adds an item to their shopping cart but then removes the item or abandons the shopping cart.
- The priority of an action map affects when it triggers. This priority is a relative setting, based on priorities of other action maps applied to the same webpage.

# View action maps

## Contents

- [1 View action maps list](#)
- [2 Search for an action map](#)
- [3 Create an action map](#)
- [4 Edit an action map](#)
- [5 Duplicate an action map](#)
- [6 Delete an action map](#)
- [7 Change the status of an action map](#)
- [8 View action map report](#)

## View action maps

Learn how to search for, create, edit, duplicate, and delete action maps.

### Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Action Map > Add, Delete, Edit, and View** (to create action maps)
  - **Journey > Action Target > View** (to select a team to handle interactions from the action map)
- Create segments.
- Create outcomes.

## View action maps list

Name	Updated	Type	Active	Options
Blocking Conditions AM	May 31, 2021	Webchat	Yes	⋮
CRS 2	December 16, 2020	Content offer	Yes	⋮
CallBack	September 29, 2020	Webchat	Yes	⋮
Coin - Explicit Bot Chat Offer	August 26, 2020	Webchat	No	⋮
Coin - Segment Bot Chat Offer	May 25, 2020	Webchat	No	⋮
Customer Scope	October 27, 2020	Webchat	Yes	⋮

**Name:** Action map name.

**Updated:** Date the action map was last modified in Predictive Engagement.

**Type:** Type of web action associated to the action map, such as web chat or content offer.

**Active:** Indicates whether the action map is active and ready to trigger on your website.

**Options:** Menu of options available for the action map, such as edit, delete, and duplicate.

## Search for an action map

## View action maps

Action Maps  
Design when and how your website engages customers.

[Create action map](#) [Action Map Reporting can be found here](#)

Q d

Name	Updated	Type	Active	Options
Blocking Conditions AM	May 31, 2021	Webchat	<input checked="" type="checkbox"/> Yes	⋮
Daniel's 2nd AM	August 4, 2021	Webchat	<input checked="" type="checkbox"/> Yes	⋮
Daniels Long Unsaveable Action Map	July 14, 2021	Web messaging offer	<input checked="" type="checkbox"/> Yes	⋮
Dylan Test <span style="color: orange;">⚠</span>	May 13, 2021	Webchat	<input type="checkbox"/> No	⋮
Eamonn_abandoned_checkout_test	November 20, 2019	Webchat	<input type="checkbox"/> No	⋮
FreqCapDemo1	February 5, 2021	Content offer	<input type="checkbox"/> No	⋮
FreqCapDemo2	February 5, 2021	Content offer	<input checked="" type="checkbox"/> Yes	⋮
FreqCapDemoContentOffer	February 5, 2021	Content offer	<input checked="" type="checkbox"/> Yes	⋮
Jitender-content-offer-test-am	July 7, 2020	Content offer	<input type="checkbox"/> No	⋮

26 - 50 of 199  per page

« < Page 2 of 8 > »

Type one or more characters (not case-sensitive) for which to search. As you type, only the action maps that match your criteria appear in the list.

A column heading with an arrow indicates that you can click the arrow to sort the list by that entity. An upward-pointing arrow indicates that the list is in ascending order and a downward-pointing arrow indicates that the list is in descending order.

## Create an action map

[Create action map](#) [Action Map Reporting can be found here](#)

Q Search

Name	Updated	Type	Active	Options
Blocking Conditions AM	May 31, 2021	Webchat	<input checked="" type="checkbox"/> Yes	⋮
CRS 2	December 16, 2020	Content offer	<input checked="" type="checkbox"/> Yes	⋮
Callback	September 29, 2020	Webchat	<input checked="" type="checkbox"/> Yes	⋮
Colin - Exploit Bot Chat Offer	August 25, 2020	Webchat	<input type="checkbox"/> No	⋮
Colin - Segment Bot Chat Offer <span style="color: orange;">⚠</span>	May 25, 2020	Webchat	<input type="checkbox"/> No	⋮
Customer Scope	October 27, 2020	Webchat	<input checked="" type="checkbox"/> Yes	⋮
Daniel's 2nd AM	August 4, 2021	Webchat	<input checked="" type="checkbox"/> Yes	⋮
Daniels Long Unsaveable Action Map	July 14, 2021	Web messaging offer	<input checked="" type="checkbox"/> Yes	⋮
Dylan Test <span style="color: orange;">⚠</span>	May 13, 2021	Webchat	<input type="checkbox"/> No	⋮
EWT test chat	July 20, 2020	Webchat	<input type="checkbox"/> No	⋮
EY - unicorn AMap	May 6, 2021	Webchat	<input checked="" type="checkbox"/> Yes	⋮
Eamonn_abandoned_checkout_test	November 20, 2019	Webchat	<input type="checkbox"/> No	⋮

To create an action map, click **Create action map** and then follow the instructions in Create an action map.

## Edit an action map

## View action maps

Action Maps

Design when and how your website engages customers.

Create action map [Action Map Reporting can be found here](#)

Name	Updated	Type	Active	Options
Blocking Conditions AM	May 31, 2021	Webchat	<input checked="" type="checkbox"/> Yes	⋮
CRS 2	December 16, 2020	Content offer	<input checked="" type="checkbox"/> Yes	⋮
Callback	September 29, 2020	Webchat	<input checked="" type="checkbox"/> Yes	⋮
Colm - Explicit Bot Chat Offer	August 25, 2020	Webchat	<input type="checkbox"/> No	⋮
Colm - Segment Bot Chat Offer 	May 25, 2020	Webchat	<input type="checkbox"/> No	⋮
Customer Scope	October 27, 2020	Webchat	<input checked="" type="checkbox"/> Yes	⋮
Daniel's 2nd AM	August 4, 2021	Webchat	<input checked="" type="checkbox"/> Yes	⋮
Daniel's Long Unsaveable Action Map	July 14, 2021	Web messaging offer	<input checked="" type="checkbox"/> Yes	⋮
Dylan Test 	May 13, 2021	Webchat	<input type="checkbox"/> No	⋮
EWT test chat	July 20, 2020	Webchat	<input type="checkbox"/> No	⋮
EY - unicorn AMap	May 6, 2021	Webchat	<input checked="" type="checkbox"/> Yes	⋮

To modify an action map, search for it and then click the **Edit** menu option. Follow the instructions in Create an action map.

## Duplicate an action map

Action Maps

Design when and how your website engages customers.

Create action map [Action Map Reporting can be found here](#)

Name	Updated	Type	Active	Options
Blocking Conditions AM	May 31, 2021	Webchat	<input checked="" type="checkbox"/> Yes	⋮
CRS 2	December 16, 2020	Content offer	<input checked="" type="checkbox"/> Yes	⋮
Callback	September 29, 2020	Webchat	<input checked="" type="checkbox"/> Yes	⋮
Colm - Explicit Bot Chat Offer	August 25, 2020	Webchat	<input type="checkbox"/> No	⋮
Colm - Segment Bot Chat Offer 	May 25, 2020	Webchat	<input type="checkbox"/> No	⋮
Customer Scope	October 27, 2020	Webchat	<input checked="" type="checkbox"/> Yes	⋮
Daniel's 2nd AM	August 4, 2021	Webchat	<input checked="" type="checkbox"/> Yes	⋮
Daniel's Long Unsaveable Action Map	July 14, 2021	Web messaging offer	<input checked="" type="checkbox"/> Yes	⋮
Dylan Test 	May 13, 2021	Webchat	<input type="checkbox"/> No	⋮
EWT test chat	July 20, 2020	Webchat	<input type="checkbox"/> No	⋮
EY - unicorn AMap	May 6, 2021	Webchat	<input checked="" type="checkbox"/> Yes	⋮

To simplify the process of creating an action map, duplicate an existing one. Search for the action map to duplicate and then click the **Duplicate** menu option. The duplicate action map displays in edit mode. Specify a new name for the duplicate action map and then modify the remaining information as appropriate.

## View action maps

## Delete an action map

Action Maps  
Design when and how your website engages customers.

Create action map Action Map Reporting can be found [here](#)

Name	Updated	Type	Active	Options
Blocking Conditions AM	May 31, 2021	Webchat	<input checked="" type="checkbox"/> Yes	⋮
CRS 2	December 16, 2020	Content offer	<input checked="" type="checkbox"/> Yes	⋮
Callback	September 29, 2020	Webchat	<input checked="" type="checkbox"/> Yes	⋮
Colm - Explicit Bot Chat Offer	August 25, 2020	Webchat	<input type="checkbox"/> No	⋮
Colm - Segment Bot Chat Offer <span>⚠</span>	May 25, 2020	Webchat	<input type="checkbox"/> No	⋮
Customer Scope	October 27, 2020	Webchat	<input checked="" type="checkbox"/> Yes	⋮
Daniel's 2nd AM	August 4, 2021	Webchat	<input checked="" type="checkbox"/> Yes	⋮
Daniels Long Unsaveable Action Map	July 14, 2021	Web messaging offer	<input checked="" type="checkbox"/> Yes	⋮

**Options menu for 'Callback':** View, Edit, Duplicate, **Delete**

To delete an action map permanently, search for the outcome, click the **Delete** menu option, and then confirm.

### Important

Deletion is permanent. To suspend the action map from triggering, change its status to inactive.

## Change the status of an action map

Action Maps  
Design when and how your website engages customers.

Create action map Action Map Reporting can be found [here](#)

Name	Updated	Type	Active	Options
Blocking Conditions AM	May 31, 2021	Webchat	<input checked="" type="checkbox"/> Yes	⋮
CRS 2	December 16, 2020	Content offer	<input checked="" type="checkbox"/> Yes	⋮
Callback	September 29, 2020	Webchat	<input checked="" type="checkbox"/> Yes	⋮
Colm - Explicit Bot Chat Offer	August 25, 2020	Webchat	<input type="checkbox"/> No	⋮

When you create an action map, it is active and ready to trigger on your site immediately. To prevent an action map from triggering, slide the toggle to **No**. The toggle is also available when you create or edit an action map.

## View action map report

## View action maps

---

To learn how visitors interacted with a specific action map and whether the outcome of the action map was achieved, see the Action maps report. For more information about action maps view, see Journey Action Maps view in the Genesys Cloud CX Resource Center.

# Create an action map

## Contents


- [1 High-level steps](#)
- [2 AI-23 Add to High-level steps section](#)
- [3 Example: How to create an action map](#)

Learn how to create an action map that Genesys Predictive Engagement uses to engage visitors.

### Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Action Map > Add, Delete, Edit, and View** (to create action maps)
  - **Journey > Action Target > View** (to select a team to handle interactions from the action map)
- Deploy one of the following:
  - For Genesys Cloud CX customers using web messaging, configure and deploy Genesys Messenger.
  - For all other customers, deploy the tracking snippet on the website to track so that you can trigger the action map based on pageview events. To trigger an action map based on other events, use `ac('record')` to send Genesys Predictive Engagement data about the events to track.
- Create segments.
- Create outcomes.
- Create the action.

## High-level steps

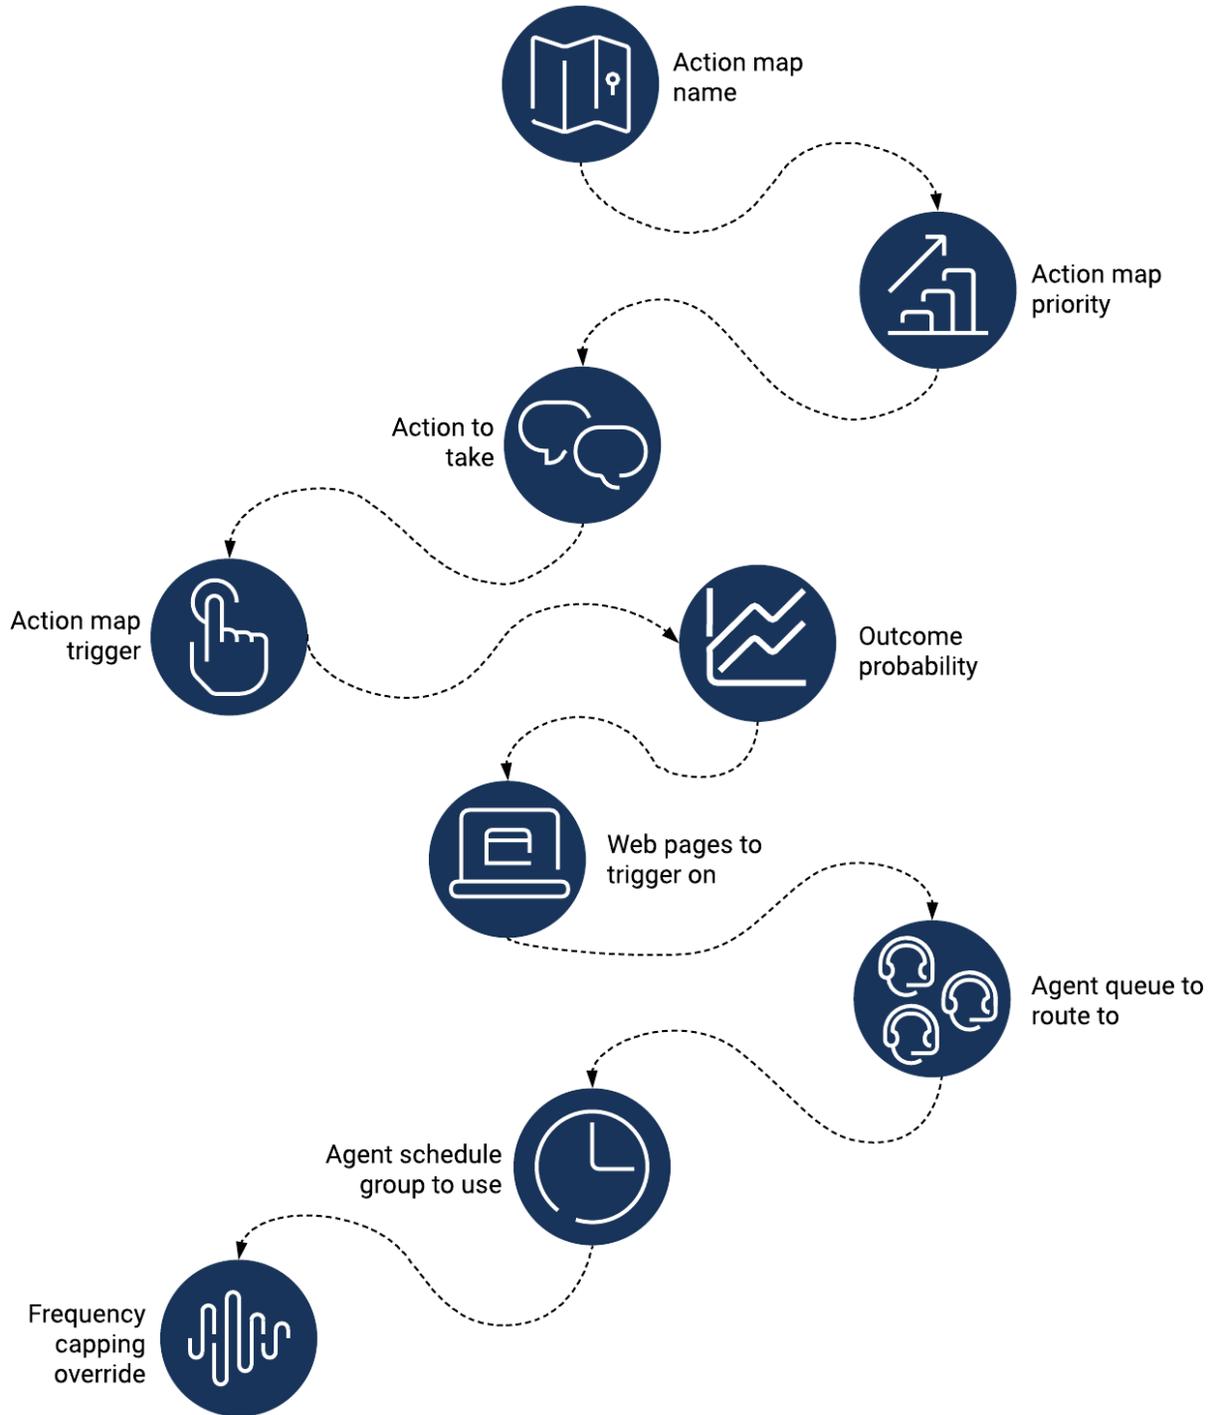

### Important

- Some options are only available for certain actions.
- To create an action map after you reach the limit of 200 action maps, delete an existing action map.

1. Specify a descriptive name for the action map.
2. Set the action map's priority relative to similar action maps.

### Tip

The action map is active and ready to trigger on your site by default. To prevent the action map from triggering on your site, slide the toggle to **No**.

3. Select which action to use when the action map triggers: web messaging, web chat, content offer, or advanced orchestration flow.
4. Specify what triggers the action map (segment, visitor activity, outcome).
5. Configure an outcome probability.
6. Specify the webpages where you do or don't want the action map to trigger.
7. If the action map is for a web chat offer:
  - a. To route the action map to a specific agent queue, select an agent queue.
  - b. To only present chat offers when agents are available to receive them, select a schedule group.
3. To ignore the global frequency cap settings and always offer web engagements that this action map qualifies, override the frequency cap for this action map.

## Example: How to create an action map

[Link to video](#)

This video shows how to create an action map for offering a proactive chat to visitors on your website.

# About actions

An action represents the steps to take to engage with visitors or to further related business outcomes.

## Contents

- [1 Overview of actions and action maps](#)
- [2 Content offers](#)
- [3 Web chats](#)
- [4 Web messaging](#)
- [5 Architect flow actions](#)
- [6 Monitor your actions](#)

## Overview of actions and action maps

An action represents the steps to take to engage with users or to further related business outcomes. Genesys Predictive Engagement supports numerous types of actions, including content offers, webhooks, web messaging, and webchats.

An action map defines when and how you use an action.

- [About action maps](#)
- 

## Content offers

Content offers allow you to present highly customized, personalized offers to your website visitors.

- [Overview](#)
  - [Video: Create a content offer](#)
  - [Create a content offer](#)
  - [Publish a content offer](#)
  - [Monitor a content offer's performance](#)
  - [Content offers lifecycle](#)
- 

## Web chats

Web chats allow you to present a standalone chat window to visitors.

- [Overview](#)
  - [Video](#)
  - [Chat offer](#)
  - [Chat window](#)
  - [Monitor a web chat's performance](#)
  - [Web chat lifecycle](#)
-

## Web messaging

Web messaging allows you to support interactions that occur when a visitor enters and exits your site numerous times. For example, a visitor might converse with an agent, leave your site, return to your site, resume the conversation, and then place an order.

- [About web messaging](#)
- 

## Architect flow actions

Architect flows allow you to send journey context data to third-party systems using a special type of Architect workflow. For example, you can send information about campaign contacts to Salesforce or another CRM.

- [Overview of Architect flow actions](#)
  - [Salesforce lead creation and campaign attribution integration](#)
  - [Configure a Genesys Cloud CX integration](#)
  - [Configure Genesys Cloud CX data actions](#)
  - [Campaign parameters](#)
  - [Prepare the workflow](#)
  - [Update referential integrity constraints](#)
  - [Create an action map for the Architect flow action](#)
  - [Override default variables](#)
  - [Go-live checklist](#)
  - [Monitor an Architect flow action's performance](#)
- 

## Monitor your actions

Genesys Predictive Engagement's analytics allow you to evaluate the effectiveness of your actions.

- [Action map performance report](#)
- 
-

# About web messaging

Learn how to work with web messaging in Genesys Predictive Engagement.

## Contents

- [1 Overview](#)
- [2 Get started with web messaging](#)
- [3 Monitor web messaging offers](#)

## Overview

Learn what web messaging is and how it works in Genesys Predictive Engagement.

- Web messaging overview
  - Supported browsers for web messaging
- 

## Get started with web messaging

Learn how to start using web messaging with Genesys Predictive Engagement. If you are using web chat offers currently, you must complete the migration tasks first.

- Migrate from web chat offers to web messaging offers
  - Configure and deploy Genesys Messenger
  - Create a web messaging offer
- 

## Monitor web messaging offers

Learn how to monitor the performance of your web messaging offers.

- Action Map Performance report metrics
  - Web messaging performance
-

# About web chats

Learn how to work with web chats in Genesys Predictive Engagement.

## Contents

- [1 Overview](#)
- [2 Create and monitor web chat offers](#)

## Overview

Learn what a web chat is and how it works in Genesys Predictive Engagement.

- Web chat overview
  - How throttling works
  - Web chat lifecycle
  - Genesys Predictive Engagement with advanced chat routing
- 

## Create and monitor web chat offers

Learn how to create a web chat offer and monitor its performance.

- Create a web chat offer
  - Monitor web chat performance
-

# About content offers

Learn how to create a content offer that engages visitors on your website and encourages them to take a pre-defined action.

## Contents

- [1 Overview](#)
- [2 Create and publish a content offer](#)
- [3 Configure an action map to use a content offer](#)
- [4 Monitor a content offer](#)
- [5 Manage a content offer](#)

## Overview

Learn what a content offer is and how it works in Genesys Predictive Engagement.

- Content offers overview
  - How content offers work
  - View content offers
- 

## Create and publish a content offer

Learn how to create a content offer and publish it for use with action maps.

- Video: Create a content offer
  - Create a content offer
  - Content options
  - Style options
  - Publish a content offer
- 

## Configure an action map to use a content offer

Learn how to configure an action map to use a content offer.

- Configure an action map to use a content offer
- 

## Monitor a content offer

Learn about the tools you can use to see who is viewing your content offer and how effective it is.

- Monitor content offers
  - View the number of times offered
- 
-

## About content offers

---

- View the click through rate
  - Metrics in the Action Map Performance Report
  - Content offer lifecycle
- 

## Manage a content offer

Learn how to manage content offers in the Action Library.

- Edit
  - Duplicate
  - Revert to draft mode
  - Archive
-

# About Architect flow actions

Genesys Predictive Engagement integrates with third-party platforms using Genesys Cloud CX integrations, data actions, and Architect workflows.

## Contents

- [1 Overview](#)
- [2 Prepare Genesys Cloud CX components](#)
- [3 Prepare Architect components](#)
- [4 Prepare Predictive Engagement components](#)
- [5 Monitor an Architect flow action's performance](#)

### Overview

Learn the purpose of Architect flow actions, review the process of creating Architect flow actions, and review a business scenario to understand how Architect flow actions work.

- Overview of Architect flow actions
  - Salesforce lead creation and campaign attribution
- 

### Prepare Genesys Cloud CX components

The first step in creating an Architect flow action is to configure an integration and configure its data action in Genesys Cloud CX.

- Configure a Genesys Cloud CX integration
  - Configure Genesys Cloud CX data actions
- 

### Prepare Architect components

To use Architect to integrate Genesys Predictive Engagement with a third-party system, prepare a special type of flow called a workflow that calls a session ID. Genesys Predictive Engagement provides a predefined example workflow that you can use. You just need to import it and update the referential integrity constraints.

- Campaign parameters
  - Prepare the workflow
  - Update referential integrity constraints
- 

### Prepare Predictive Engagement components

Finally, create an action map that uses the Architect flow action.

- Use action maps to trigger an advanced orchestration flow
  - Override default variables
- 
-

- Go-live checklist
- 

## Monitor an Architect flow action's performance

Use the Action Map Performance report to monitor an Architect flow action's performance.

- Monitor an Architect flow action's performance
-

# About journey shaping with sessions and events

Web sessions and conversation sessions provide rich context for agents about each customer's personal journey with your company.

## Contents

- [1 Overview](#)
- [2 Web sessions](#)
- [3 Event types](#)

## Overview

As a business, you want to collect data about all the ways in which a customer interacts with your company, along with the outcomes of those interactions. Genesys Predictive Engagement captures this information as sessions and events.

You can analyze this data to acquire business intelligence, develop a unified view of the customer, improve agent and bot performance, deflect calls, improve customer satisfaction, and improve business outcomes.

- Types of sessions
- 

## Web sessions

Genesys Predictive Engagement allows agents to view the complete history of web-based interactions that customers have with your website. We verify contacts when web sessions begin and track specific types of web events.

- Overview
  - How we verify contacts on your website
  - Web session type
  - Web session events
  - Customize how agents view web events
  - Capture custom website events with one of the following:
    - If you deployed the tracking snippet to your website, see `ac('record')`
    - If you deployed the messenger snippet to your website, see `Journey.record`
- 

## Event types

Event types are templates of attributes that you capture for events. You can view the available event types and configure how specific instances of events appear to agents.

- Overview
  - Where agents see event-specific information
  - How you make event information meaningful to agents
- 
-

- View event types for a session
  - Configure the list of events
  - Configure the tooltip
  - Delete an event type
-

# Types of sessions

## Contents

- [1 Types of sessions](#)

**Feature coming soon!** Learn about the types of sessions that Genesys Predictive Engagement uses to organize groups of related events.

## Types of sessions

Genesys Predictive Engagement organizes data about each customer's activity into sessions. In its simplest terms, a session is a set of related events that involve a single customer, within a given timeframe.

Session type	Examples	Example events in the session
Web sessions	Customer goes to your website and completes a form to place an online order.	<ol style="list-style-type: none"><li>1. Go to the website.</li><li>2. Go to the online order form.</li><li>3. Complete the form.</li><li>4. Submit the form.</li></ol>

DOC-3294 Removed conversation entry temporarily

Session type	Examples	Example events in the session
Conversation	<p>Customer calls your help desk and speaks to an agent.</p> <p>Customer accepts a web chat and the conversation routes to an agent.</p>	<ol style="list-style-type: none"><li>1. Call the help desk.</li><li>2. Route to an agent.</li><li>3. Receive the resolution.</li><li>4. End the call.</li><li>5. Assign a wrap-up code.</li></ol>

Removed custom sessions as part of AI-381 rollback.

Custom	Order ships.	<ol style="list-style-type: none"><li>1. Remove from inventory stock.</li><li>2. Put on a plane.</li><li>3. Deliver to a distribution</li></ol>
--------	--------------	---

## Types of sessions

---

		center. 4. Put on a truck. 5. Deliver to customer's address.
--	--	--

# Web sessions

## Contents

- [1 Overview](#)
- [2 How we verify contacts on your website](#)
- [3 Web session type](#)
- [4 Web events](#)
- [5 Custom web events](#)
- [6 Web session cards](#)
- [7 Where agents see event-specific information](#)
- [8 Configure web session cards](#)

**Feature coming soon!** Learn how to capture information about customer activity on your website and present it to agents.

### Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - To see custom sessions and custom events, assign agents specific permissions.
- Deploy one of the following:
  - For Genesys Cloud CX customers using web messaging, configure and deploy Genesys Messenger.
  - For all other customers, deploy the tracking snippet.

### Overview

When you track your website with Genesys Predictive Engagement, we capture the history of web interactions. This history includes all the times and ways that customers visited and interacted with your website.

Each time a customer arrives on your website, a new web session begins. The web session ends when a customer is inactive for 20 minutes or longer.

### How we verify contacts on your website

When a customer comes to your website, we attempt to verify their identity using their cookie. If no cookie is available, we attempt to verify their identity with identifiers that we collect from the web, such as phone or email.

#### Important

- Successful verification requires a phone number in E164 format.
- We do not create contacts from cookies.
- We do add cookies to existing Genesys Cloud CX external contacts.

If you deployed the tracking snippet to your website and you use the Journey JavaScript SDK to capture a customer's personal data while they are on your website, it's possible for us to identify them. For example, you can use `ac 'identify'` and map traits to link visitor records.

If we are unable to verify that the customer has a corresponding customer record, the customer's name appears as "Unknown" in the session card.

## Web session type

We assign each web session the predefined web session type. You cannot change this type.

## Web events

As a customer navigates your website, Genesys Predictive Engagement collects the following data about the customer's activity during a web session. Agents can view this information in the web session card. You can use this data to create segments, outcomes, and action maps that orchestrate future visitor journeys:


- Page views (only available if you deployed the tracking snippet to your website)
- Custom web events
- Searches

For more information about web event tracking for billing purposes, see [Billing and usage](#).

AI-23 Add to section above

For more information about tracking limits, see [Limits for Genesys Predictive Engagement objects](#).

## Custom web events

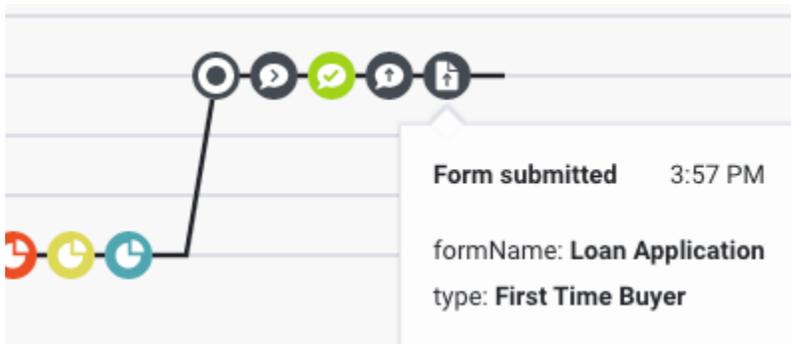

You can track custom web events using one of the following:

- If you deployed the tracking snippet to your website, see `ac('record')`
- If you deployed the messenger snippet to your website, see `Journey.record`

For example:

- Button clicks (for example, add to cart, submit a form)
- Check out
- Play video
- In-page messaging (for example, wrong password, form errors)

For these custom web events, you can track custom attributes. When an agent clicks the event's icon on the customer journey map, the custom attributes and their corresponding values appear in the tooltip.

## Web session cards

Agents see a separate session card for each web session. The session card includes:


- Title
- Icon
- Duration
- Current page
- Session information
- Journey map
- Searches performed
- Segments matched during the session
- Outcomes achieved during the session

## Where agents see event-specific information


Agents see event-related data in the journey map when they view session details. The following image shows a web session. The pages that the customer viewed appear along the left, and the specific events that occurred during the session appear in the customer journey map. When the agent rests their mouse on an icon in the map, a tooltip provides more details.

As the following section explains, you can change the names of the events and the information in the tooltip.

## Web sessions

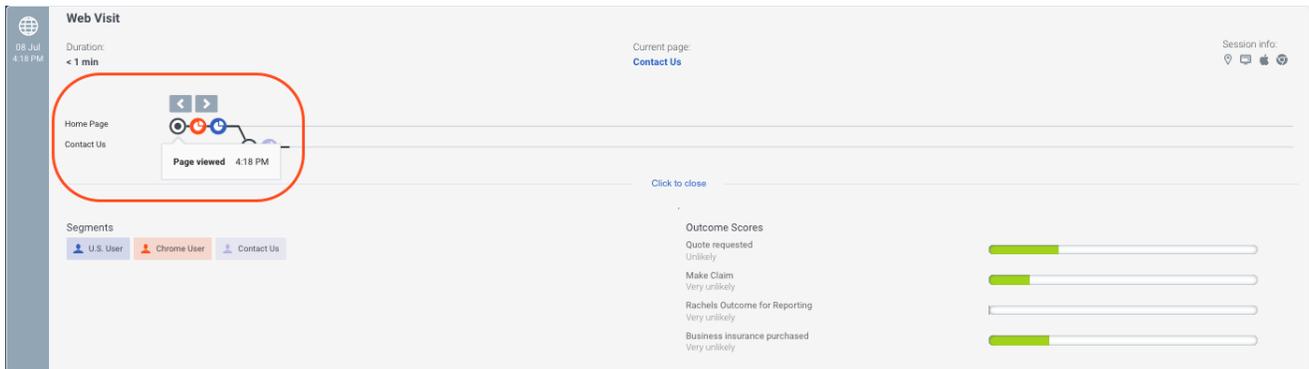

## Configure web session cards

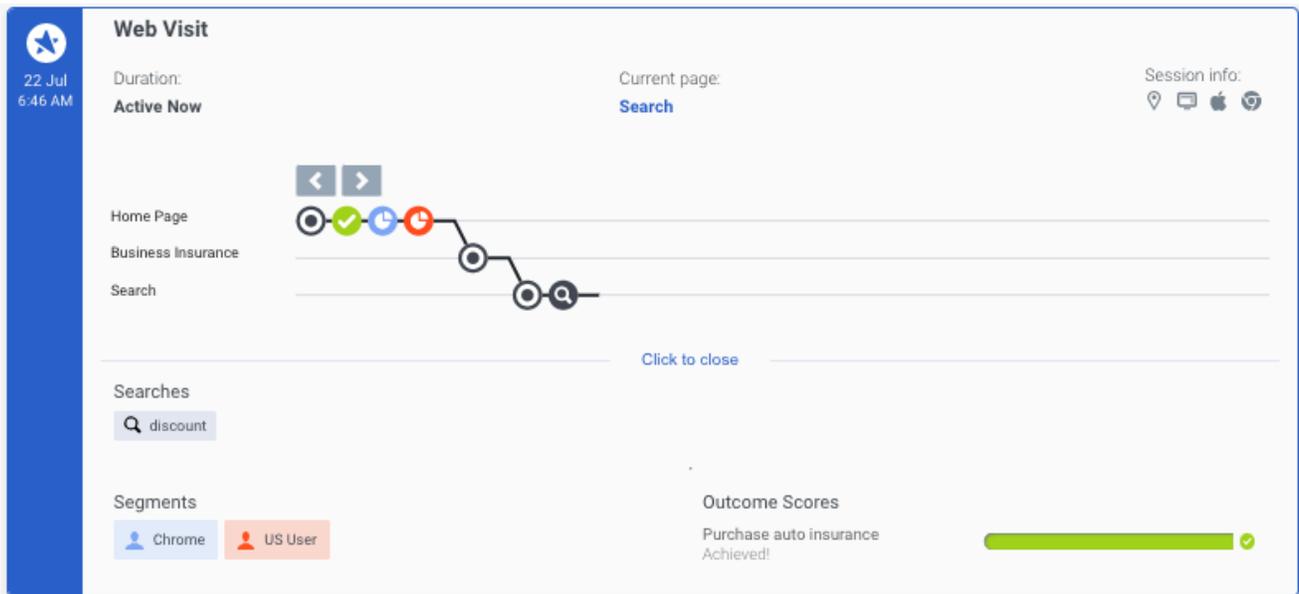

You can configure the appearance of the web session cards:

- Name that appears as the title on all web session cards (Ex: "Web Visit")
- Appearance of attributes in the tooltip

# About journey data

Learn what types of customer journey data that you and your agents can see about a visitor's interactions with your website.

## Contents

- [1 Customer journey data](#)

## Customer journey data

Learn what types of customer journey data that you and your agents can see about the visitors on your website.

- Live Now
  - Customer summary (admin view)
  - Unknown users
-

# Live Now

## Contents

- [1 See who is active on your website](#)

Learn how to see real-time information about visitors on your website. Skip to the visit journey map or the description of the icons.

### Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Customer > View** (to see information about existing customers)
  - **Journey > Event > View** (to see events on the customer journey map)
  - **Journey > Outcome > View** (to see outcomes achieved and scores for a visit)
  - **Journey > Segment > View** (to see matched segments for a visit)
  - **Journey > Visit > View** (to see live tracking information about visitors who are currently on your website)

### See who is active on your website

The Live Now view shows who is active on your website. In Admin in Genesys Cloud CX, open the **Live Now** page.

Action	Description
Last Active (1)	The last active reflects the visitor's status on your website:

Action	Description
	<ul style="list-style-type: none"> <li>• <b>Green:</b> Visitor is active on your website.</li> <li>• <b>Yellow:</b> Visitor has been inactive for 45 seconds. For example, the visitor minimized the browser window or is looking at a different site in a separate tab. It remains inactive unless the customer triggers another web event (for example, a page view), at which point the interaction shows as “live” again.</li> <li>• For <b>past interactions</b>, the date the interaction occurred appears.</li> </ul>
View visitor details (2)	To see the details about a visitor, click the visitor's name. For more information about the types of details available, see Customer summary (admin view).
View the webpage the visitor is on (3)	To see the webpage that the visitor is on currently, click the link under <b>Browsing</b> .
Filter by segments (4)	<p>To see only visitors who belong to specific segments, in the <b>Choose segments</b> list, select the segment.</p> <p>You can select active segments that display to agents. For more information about configuring these options, see Manage segments.</p> <p>For more information on how to create and use segments, see About segments and Trigger an action map based on segment match.</p>
Search for visitors (5)	<p>You can search for visitors by their:</p> <ul style="list-style-type: none"> <li>• Name</li> <li>• Browsing website</li> <li>• Location</li> </ul> <p>For example, a search for "Atl" displays visitors from Atlanta. A search for "Ho" displays all visitors who are browsing the "Home Insurance" webpage and the visitors in the "Hot Prospect" segment.</p> <p>Search is not case-sensitive.</p>
Refresh (6)	Live Now displays the most recent information of all the sessions listed on the page. To view the newer web sessions (that are not listed yet), click <b>Refresh</b> .

# Customer summary (admin view)

## Contents


- [1 Customer summary](#)
- [2 Session cards](#)
- [3 View journey details](#)
- [4 View searches performed](#)
- [5 Outcome predictions](#)
- [6 Segments matched](#)
- [7 Copy activity data](#)
- [8 View more cards](#)
- [9 AI-381 updates](#)

In Live Now, learn how to see details about a visitor and their previous engagements with your company.

### Prerequisites


- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Customer > View** (to see information about existing customers)
  - **Journey > Event > View** (to see events on the customer journey map)
  - **Journey > Visit > View** (to see live tracking information about visitors who are currently on your website)

## Customer summary

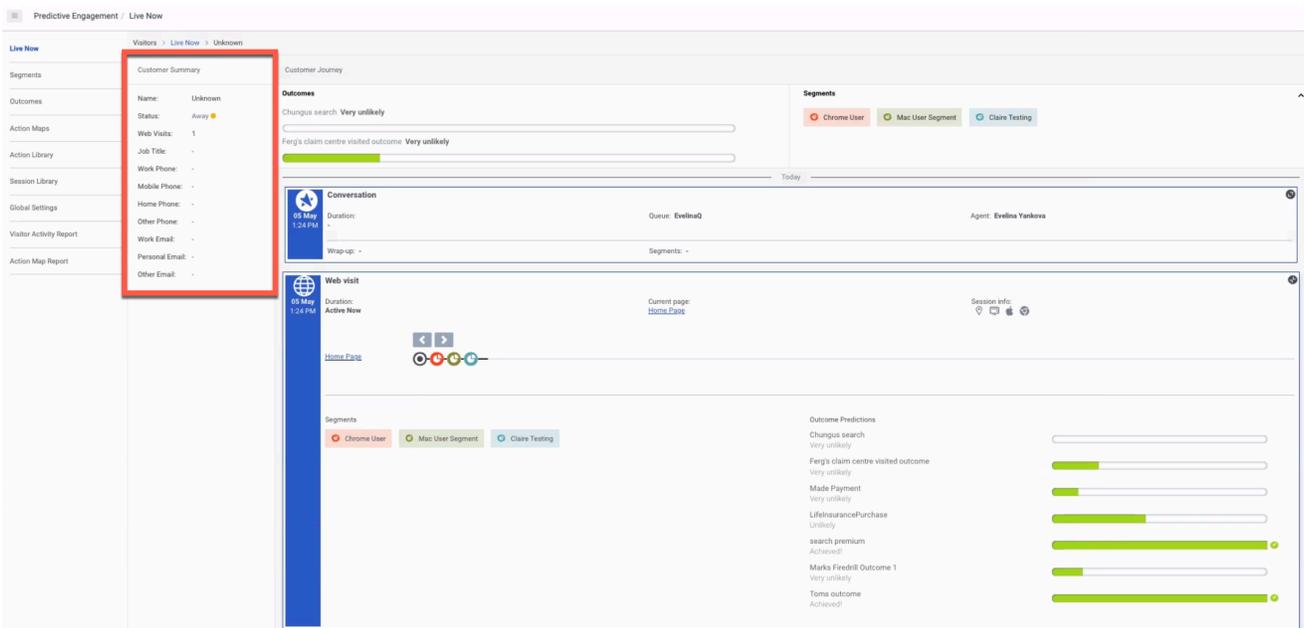

Customer summary details include the visitor's current status and the total number of times that they viewed any of your tracked web pages during the current session. When a logged-in user logs out and continues to use the website, Predictive Engagement considers the user as a new user and creates a new visitor journey map for all actions of the unauthenticated user.

## Session cards

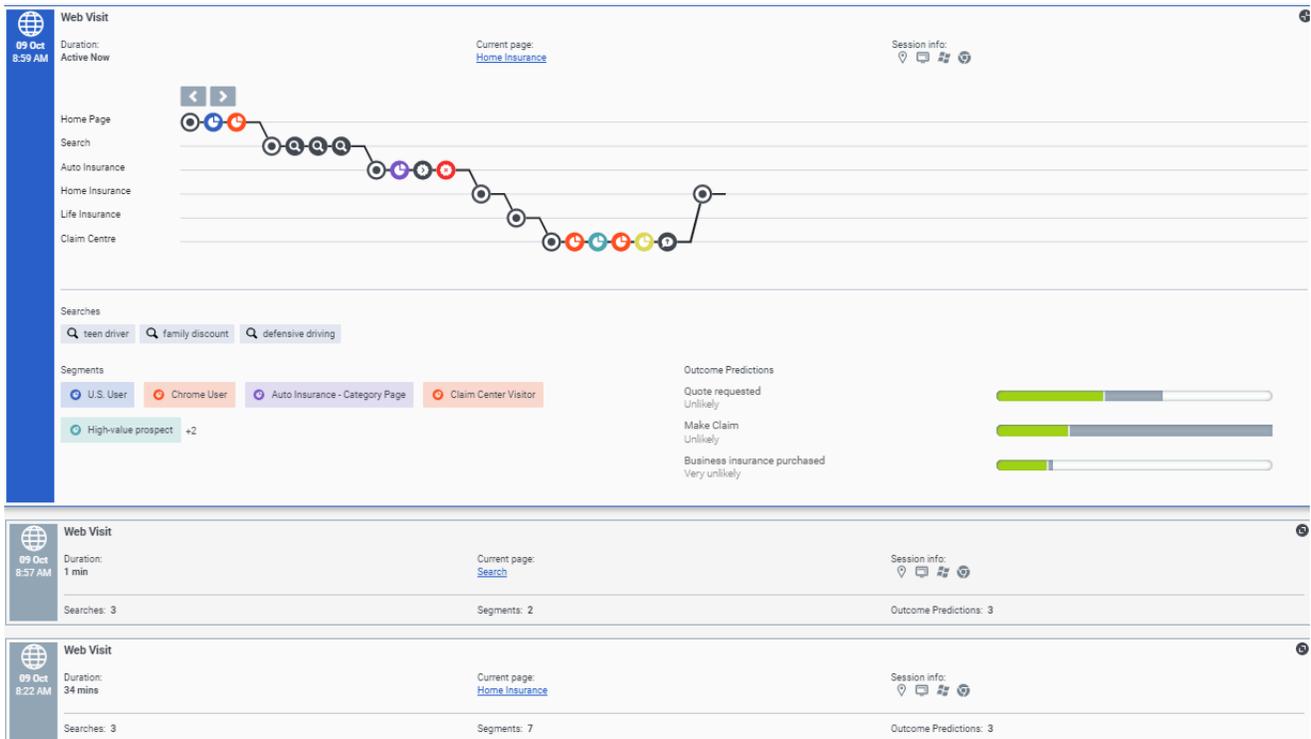

Session cards organize journey data so that you can see current and historical activity. Each card represents what the customer did during a particular period called a session.

The newest session card appears at the top. If the session card is blue, the customer is active on your website. After 30 minutes of inactivity, the card color changes to gray.

### Important

- If the customer provides an email address or phone number after the current session begins, you may see more sessions because we try to match external contact records based on this data.
- We show data only about webpages that we track. If a customer leaves your website and then comes back, we do not show you where the customer went.

## View journey details



To see more details about a card, click it. In this view, you see the journey map.

The visitor journey map indicates:

- Which pages a visitor saw and in what order
- The engagement types that the visitor had with an agent or with Genesys Predictive Engagement while on a page
- The segments that the visitor matched
- The outcomes that the visit achieved
- The searches that the visitor performed
- Traits of the visitor

The map updates in real time as the customer navigates your website, responds to interaction requests, and matches segments. To see the details of an item on the map, click its icon. For more information about the icons, see Journey map icons.

**Tip**


- You can expand multiple cards simultaneously.
- The color of a segment matched icon corresponds to the color of the actual segment.

## Important

If there are no segments, searches, or outcomes, there is no expanded view.

When a logged in user logs out and continues to use the website, Predictive Engagement considers the user as a new user and creates a new journey map for all actions of the unauthenticated user actions.

## View searches performed

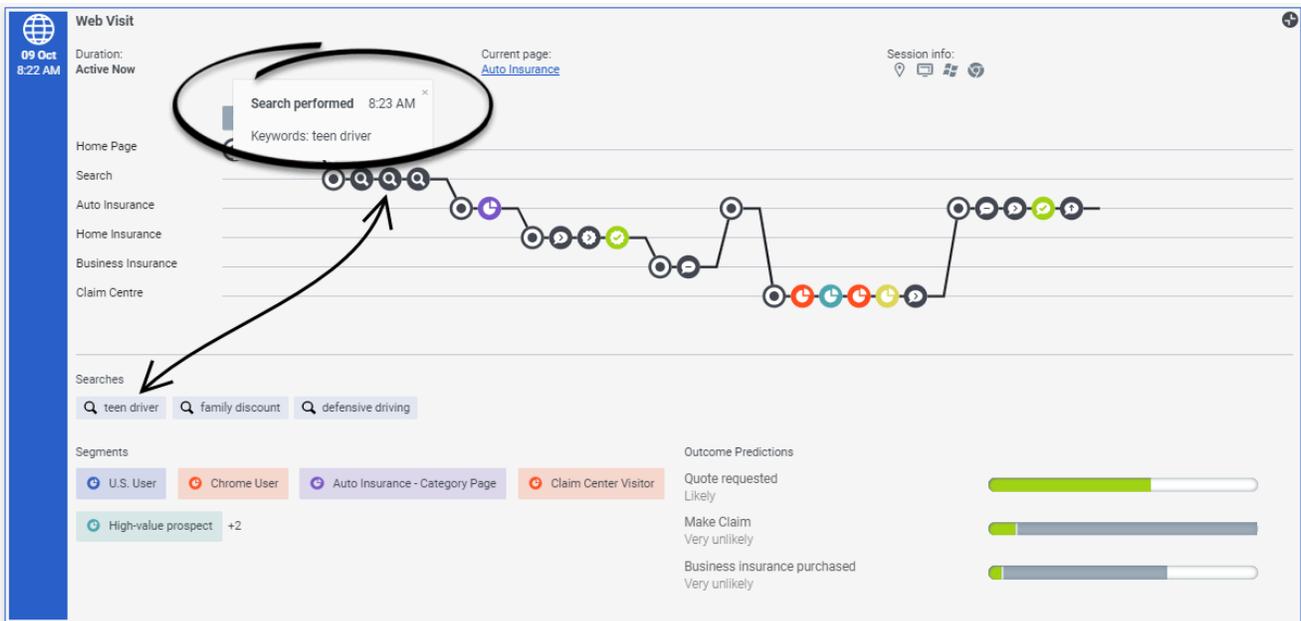


Knowing what customers searched for on your website prepares you to answer questions that they may have. Search information appears in two places on the **Predictive Engagement Customer Journey** tab.

- In the journey map, click a search icon to see what the customer searched for at a specific point in the customer's journey.
- in the "Searches performed" section of the **Predictive Engagement Customer Journey** tab, you can view a list of all the terms that the customer searched for during the session.

## Outcome predictions

**Outcomes**

Quote requested Unlikely




Make Claim Achieved!




An outcome represents a particular goal and the colored bars represent the customer's progress toward that goal. For example, if the goal is to purchase a product, the customer's progress moves toward that goal when the customer puts an item in their shopping cart. These bars update in real time as the customer's progress changes. For more information about outcomes, see [About outcome predictions and probabilities](#).

### Segments matched

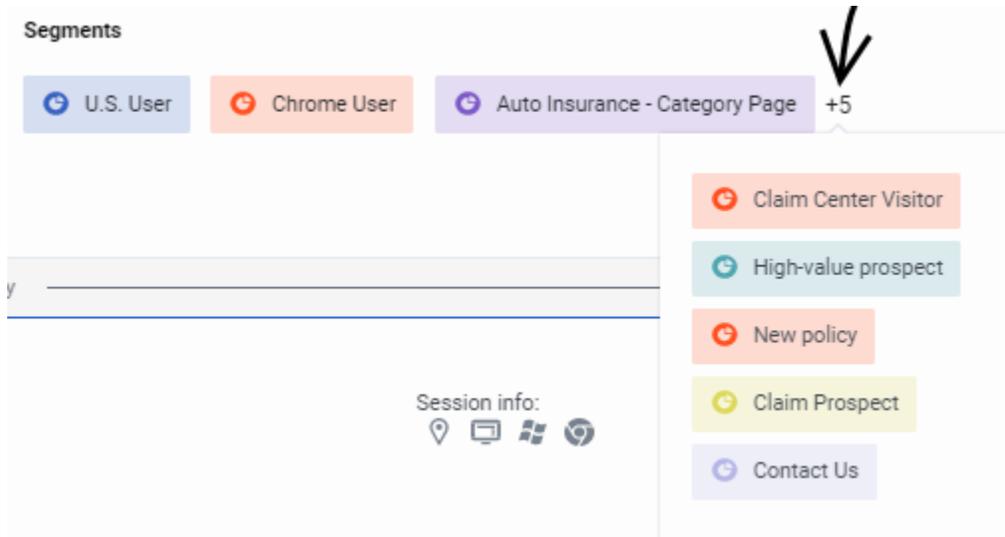


A segment represents a group of customers that have something in common. For example, a segment might include all customers who use the same browser or are from the same geographic region. Segments appear in the order that Genesys Predictive Engagement assigns them to the customer. For more information about segments, see [About segments](#).

## Copy activity data

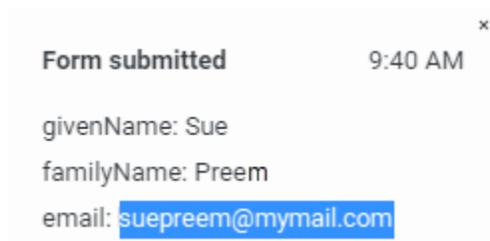

When viewing activity details, you can copy data (such as an email address) to the clipboard so that you can paste it elsewhere.

## View more cards

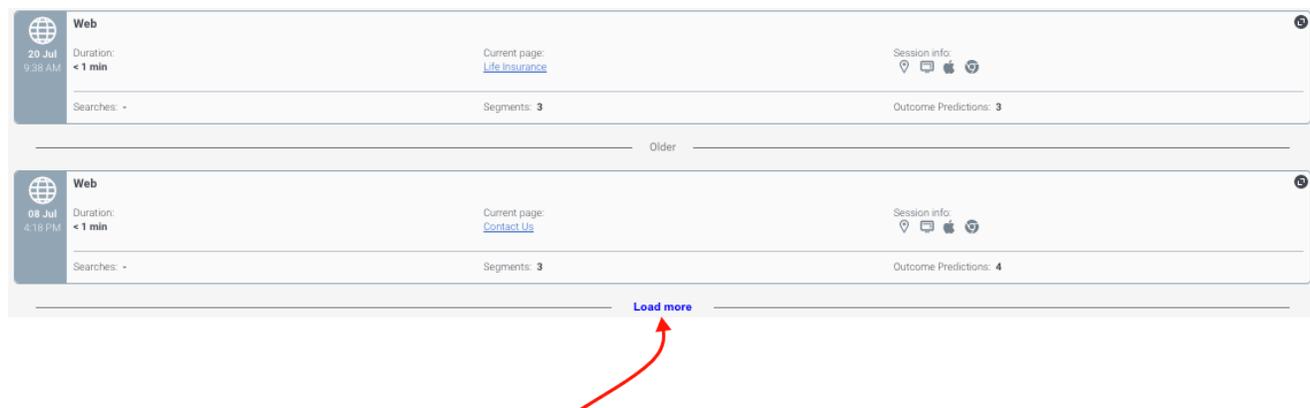

To see more cards, click **Load More** at the bottom of the list.

}}

# Visit journey map (admin view)

## Contents

- [1 View a visitor's journey](#)
- [2 See point-in-time details](#)
- [3 About the icons](#)
- [4 Messaging icons](#)
- [5 Chat icons](#)
- [6 Content offer icons](#)
- [7 Form-related icons](#)
- [8 Purchase-related icons](#)
- [9 Journey shaping icons](#)
- [10 Miscellaenous icons](#)

In Live Now, learn to use a graphical representation of a visitor's path through your website. This information provides the full context of a visitor's questions and can help you understand their needs. For more information about the icons, see icon descriptions.

## Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Customer > View** (to see information about existing customers)
  - **Journey > Event > View** (to see events on the customer journey map)
  - **Journey > Visit > View** (to see live tracking information about visitors who are currently on your website)

## View a visitor's journey



The visit journey map indicates:


- Which pages a visitor saw and in what order
- The engagement types that the visitor had with an agent or with Genesys Predictive Engagement while on a page
- When the visitor matched segments

To see URLs instead of page titles, click **URL**.

### Important

If a logged-in user logs out, Predictive Engagement considers the user as a new user and creates a new journey map.

See point-in-time details

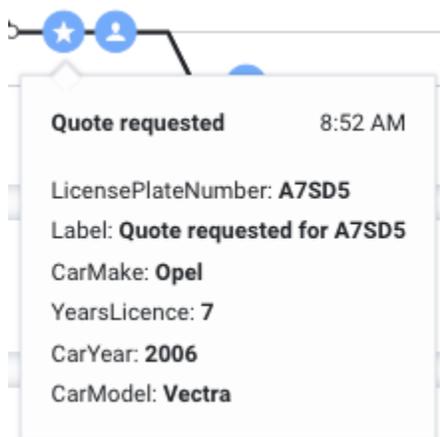

To see more information about what the visitor did, rest your mouse on an icon.

About the icons



**Positive**



**Neutral**



**Negative**

Icon descriptions:

- Messaging activity icons
- Chat activity icons

- Form activity icons
- Purchase activity icons
- Journey shaping icons
- Miscellaneous icons

## Messaging icons

This section only applies to Genesys Cloud CX customers using web messaging.

Icon	Tooltip	Description
	Messaging offered	Genesys Predictive Engagement offered messaging to the visitor.
	Messaging accepted	Visitor accepted the messaging offer.
	Messaging requested	Visitor requested messaging.
	Messaging rejected	Visitor rejected the messaging offer.
	Messaging timed out	Messaging offer timed out before the visitor responded.
	Messaging ignored	Visitor left the website before responding to the messaging offer.

## Chat icons

This section only applies to customers using web chat.

Icon	Tooltip	Description
	Chat offered	Genesys Predictive Engagement offered a chat to the visitor.

---

Icon	Tooltip	Description
	Chat accepted	Visitor accepted the offer to chat.
	Chat requested	Visitor requested a chat.
	Chat rejected	Visitor rejected the offer to chat.
	Chat timed out	Offer to chat timed out before the visitor responded.
	Chat ignored	Visitor left the website before responding to the chat offer.

## Form-related icons

Icon	Tooltip	Description
	Form submitted	Visitor submitted a form.
	Form abandoned	Visitor abandoned the form before completing it.

## Purchase-related icons

Icon	Tooltip	Description
	Product added to cart	Visitor added a product to their shopping cart.

## Visit journey map (admin view)

---

Icon	Tooltip	Description
	Product removed from cart	Visitor removed a product from their shopping cart.
	Checkout complete	Visitor completed the checkout transaction.

## Journey shaping icons

Icon	Tooltip	Description
	Outcome achieved	Visitor achieved one of your outcomes.
	Segment matched	Visitor matched one of your segments.

## Miscellaneous icons

Icon	Tooltip	Description
	Page viewed	Visitor viewed the page. <b>Important</b> It's possible for a web session card to have multiple page titles with the same name. If the URL of a page changes, a new line will form on the web session card and the URL will update. We aren't facilitating dynamic values within a page if a visitor reloads the page.
	Searched	Visitor searched for something on your site.

---

Icon	Tooltip	Description
	Default	Default icon used when no other icon is applicable.
	Error	An error occurred.

# Searches performed (admin view)

## Contents

- [1 View searches performed](#)
- [2 View search details in the visit journey map](#)

In Live Now, learn how to see what a visitor searched for on your website. This information provides insight into their specific questions and prepares you to answer them.

### Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Customer > View** (to see information about existing customers)
  - **Journey > Event > View** (to see events on the customer journey map)
  - **Journey > Visit > View** (to see live tracking information about visitors who are on your website currently)

### View searches performed




Each time a visitor searches your website, the URL for your webpage changes. Since Genesys Predictive Engagement tracks URL changes, it can display information to your agents about each visitor's specific searches under **Searches performed**.

#### Important

You must configure your URL search parameter in your site search settings.

## View search details in the visit journey map

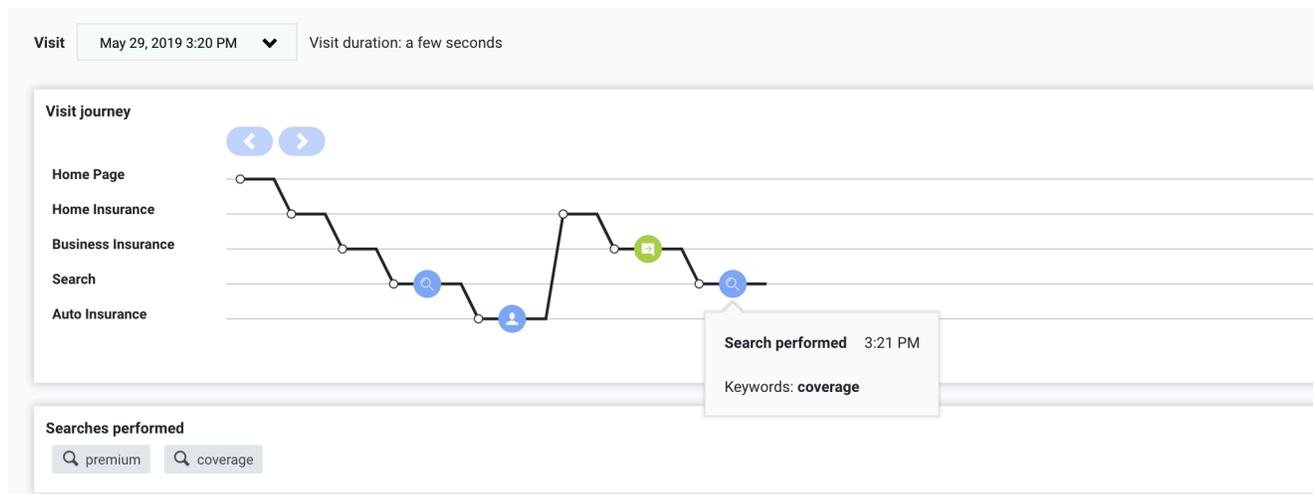

In the visit journey map, rest your mouse on a search icon to see what the visitor searched for.

# Segments assigned (admin view)

## Contents

- [1 View assigned segments](#)

In Live Now, learn how to use segments to understand what characteristics or behaviors a visitor shares with other visitors.

### Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Customer > View** (to see information about existing customers)
  - **Journey > Event > View** (to see events on the customer journey map)
  - **Journey > Segment > View** (to see matched segments for a visit)
  - **Journey > Visit > View** (to see live tracking information about visitors who are currently on your website)

## View assigned segments

### Segments



A segment represents a group of visitors who have something in common. For example, a segment might include all visitors who use the same browser or are from the same geographic region.

Segments appear in the order in which Genesys Predictive Engagement assigns them to the visitor.

For more information on defining segments, see [Manage segments](#).

# Outcome scores (admin view)

## Contents

- [1 View outcome scores](#)

In Live Now, learn how to recognize when a visitor is or is not progressing towards one of your business goals.

### Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Customer > View** (to see information about existing customers)
  - **Journey > Event > View** (to see events on the customer journey map)
  - **Journey > Outcome > View** (to see outcomes achieved and scores for a visit)
  - **Journey > Visit > View** (to see live tracking information about visitors who are currently on your website)

## View outcome scores

### Outcome scores

Made Payment



A solid green bar indicates that the visitor achieved the outcome.

A bar with green and red indicates that the visitor has not yet achieved the outcome. The amount of green indicates approximately how close the visitor is to achieving the goal. For more information on defining business outcomes, see [Manage outcomes](#). For more information on how Genesys Predictive Engagement gathers and uses outcome data, see [Outcomes overview](#).

# Additional information (admin view)

## Contents

- [1 View additional information](#)
- [2 Browsers](#)
- [3 Devices](#)
- [4 Operating system](#)

In Live Now, learn how to view details about a visitor's geographic location and the technology they use.

## Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Customer > View** (to see information about existing customers)
  - **Journey > Event > View** (to see events on the customer journey map)
  - **Journey > Visit > View** (to see live tracking information about visitors who are currently on your website)

## View additional information

Visitors > Live now > Customer summary

**Name:** Elvis Murazik  
**Status:** Online now  
**Visits:** 1

**Additional details**

- Ashburn, Virginia
- Apple desktop
- Mac OS X 10.8
- Safari 5.2

**Visit** June 7, 2019 8:41 AM Visit duration: a few seconds

**Visit journey**

- Universal Insurance
- Home Insurance
- Auto Insurance
- Search: professional ins...

**Searches performed**

- professional insurance

View additional information, including the visitor's:

- Browser
- Device
- Operating system

## Browsers

Browser	Icon
Chrome	
Edge	
FireFox	
Internet Explorer	
Opera	
Other	
Safari	

## Devices

Device	icon
Desktop	
Laptop	
Mobile	
Tablet	

Operating system

Operating system	Icon
Android	
Linux	
MacOS	
Windows	
Other	OS

# Unknown visitors (admin view)

## Contents


- [1 Unknown visitors](#)

In Live Now, learn how to recognize when Genesys Predictive Engagement does not recognize a visitor.

### Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Customer > View** (to see information about existing customers)
  - **Journey > Event > View** (to see events on the customer journey map)
  - **Journey > Visit > View** (to see live tracking information about visitors who are currently on your website)

## Unknown visitors

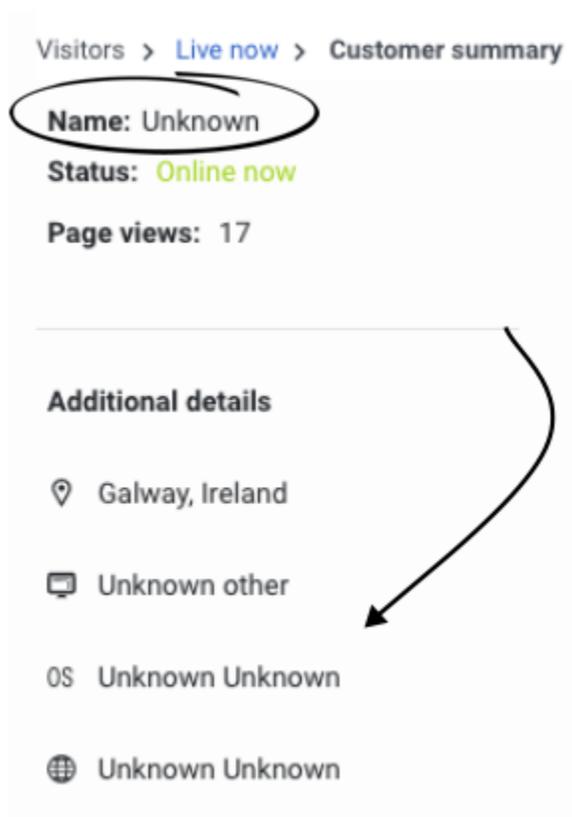

If Genesys Predictive Engagement cannot identify a visitor, Genesys Predictive Engagement displays **Unknown** in the customer summary fields. If Genesys Predictive Engagement identifies the visitor

later, the visitor's actual information appears.

When a logged in user logs out and continues to use the website, Predictive Engagement considers the user as a new user and creates a new journey map for all actions of the unauthenticated user actions.

# About analytics

Learn how to evaluate how visitors use your website and determine the effectiveness of your action maps.

## Contents

- [1 Availability of analytics data](#)
- [2 Reports](#)
- [3 Billing and usage](#)

### Availability of analytics data

Understand how Genesys Predictive Engagement's machine learning processes visitor data for reports. Learn when data results are available to you. Understand how you can select the granularity of data that appears in reports.

- Availability of analytics data
- 

### Reports

Learn about the Genesys Predictive Engagement reports and the performance views in Genesys Cloud CX.

- Visitor Activity
  - Action map performance
  - Outcome performance
  - Segment performance
  - Predictive Engagement data in other Genesys Cloud CX performance views
- 

### Billing and usage

View your billing and usage information.

- Billing and usage
-

# Availability of analytics data

## Contents

- [1 Processing data for reports](#)
- [2 Viewing updated reports](#)
- [3 Granularity of data](#)

Learn how Genesys Predictive Engagement processes data for reports, how to view updated reports, and how to see more precise data in reports.

## Processing data for reports

As a cloud-based product, Genesys Predictive Engagement receives data from timezones around the globe. Each night, Genesys Predictive Engagement processes this data in your organization's timezone for inclusion in reports. The reporting job processes all new data from 17:00 of the previous day to 17:00 of the current day. The reporting job begins at 22:45 local standard time and can take up to two hours to complete. Your fully processed, updated reports are available to you at 1:00 local standard time.

### Important

- Local standard time refers to the time in your organization's timezone. This time may differ from your personal, local time.
- Genesys Predictive Engagement uses Coordinated Universal Time (UTC) as the standard of precision for time-sensitive information. To stay consistent relative to UTC, Genesys Predictive Engagement does not observe daylight savings time in determining when to begin processing reports.
- The count for the most recent date available (yesterday) updates to include a full 24-hours of data when the next reporting job runs. Until this time, the count for the most recent date may not include all 24 hours of data because the reporting processing window is 17:00-17:00.

## Viewing updated reports

When you view a report, you select the date range for the data it shows. The date picker restricts you from selecting an end date for which data processing is incomplete.

### Important

The date picker uses your local time. If users in different timezones look at the same report at the same local time, they may see different data.

## Granularity of data

Start	End	Granularity
<input type="text" value="2019-06-04, 18:00"/>	<input type="text" value="2019-06-06, 18:00"/>	<input checked="" type="radio"/> hourly <input type="radio"/> daily

For each report, you select the granularity of data that you want to see. The more specific the granularity, the more detailed the report.

If you select hourly granularity:

- Your maximum date range is 14 days.
  - 03/02/2018 13:00 to 03/02/2018 14:00 is valid.
  - 03/02/2018 13:00 to 05/02/2018 13:00 is not valid.

If you select daily granularity:

- Your maximum date range is 365 days.
  - 03/02/2018 to 04/02/2018 is valid.
  - 03/02/2017 to 04/02/2018 is not valid.

# Visitor Activity

## Contents

- [1 About the Visitor Activity report](#)
- [2 View the Visitor Activity report](#)
- [3 Configure the Visitor Activity report](#)
- [4 Filter by segments and outcomes](#)
- [5 Filter by device category](#)
- [6 Filter by device type](#)
- [7 View report details](#)
- [8 Export the Visitor Activity report](#)
  - [8.1 About time values in exported reports](#)

Learn how to view usage data for your website.

### Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Report > View**

## About the Visitor Activity report

The Visitor Activity report shows the number of visitors on your website during a given time period. It allows you to track usage trends and to see the number of visitors at specific times. You can filter results by segments and outcomes. For more information about the availability of data in this report, see [About analytics data](#).

## View the Visitor Activity report



In Admin in Genesys Cloud CX, open the **Visitor Activity Report**.

## Configure the Visitor Activity report

## Visitor Activity



1. Select the date range for the report.
2. Specify whether you want to see hourly or daily results. For more information, see Granularity.

## Filter by segments and outcomes



**Feature coming soon: Customer segments**

## Visitor Activity


You can filter by any combination of *session* segments and outcomes. You cannot filter *customer* segments.

1. Search for segments and outcomes by their names.
2. Select up to five session segments and five outcomes to filter.
3. To remove an item, click its X.

### Important

You can select active segments that display to agents. For more information about configuring these options, see Manage segments.


## Filter by device category

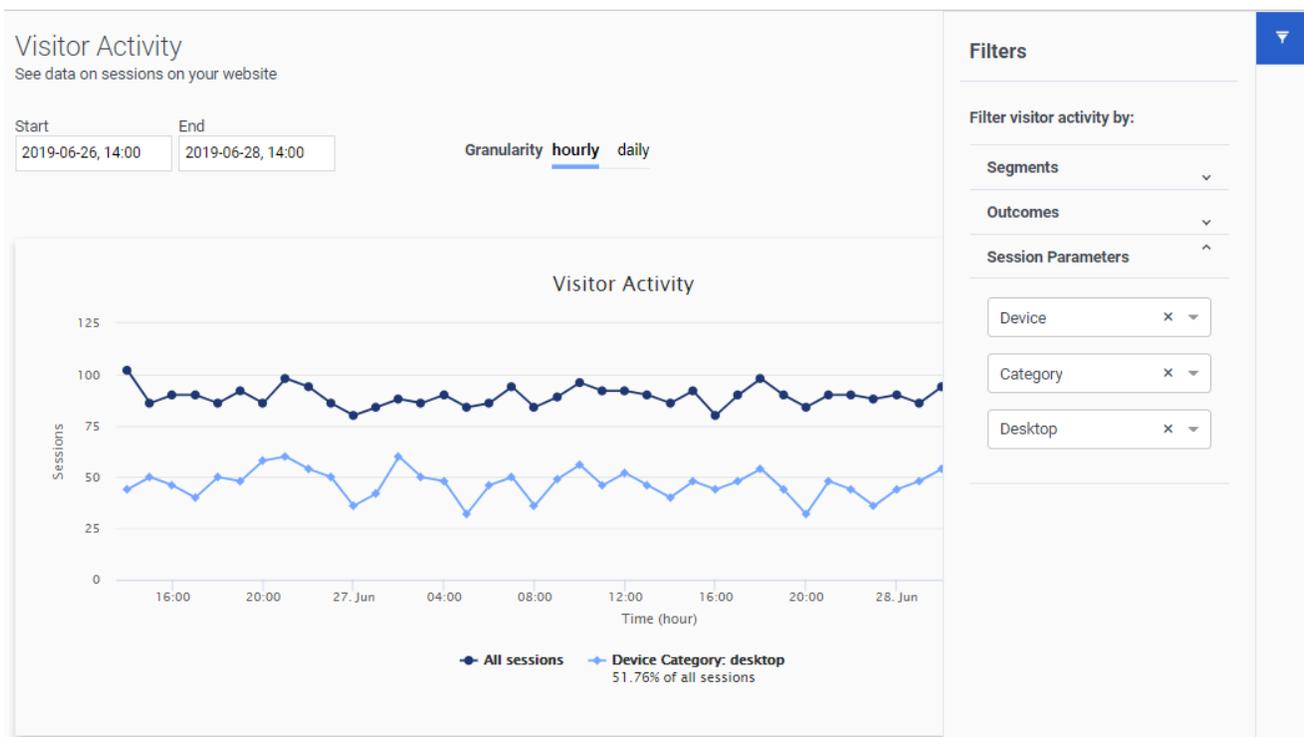

You can filter the report by device categories.

1. Select "Device," "Category," and the device category to filter.
2. Filter the report .

## Filter by device type

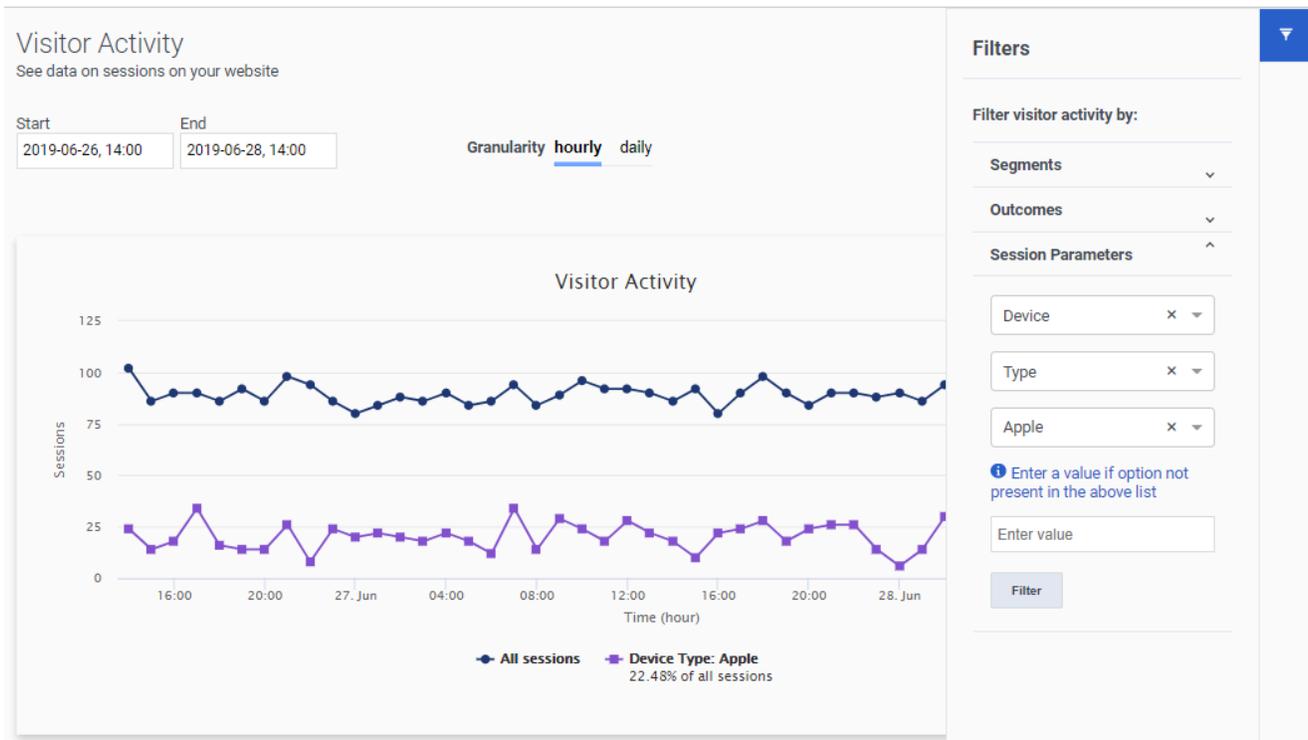


You can filter the report by device type.

1. Select "Device" and "Type."
2. Select the device type to filter:
  - If the device type is in the list, click it.
  - To search for the device type, type the first few letters of its name (not case-sensitive) and then click it.
  - To specify a device type not in the list, select "Other" and then type the device type (case-sensitive) in the box. For examples of device types, see Types of visitor attributes.
3. Filter the report.

## Visitor Activity

### View report details

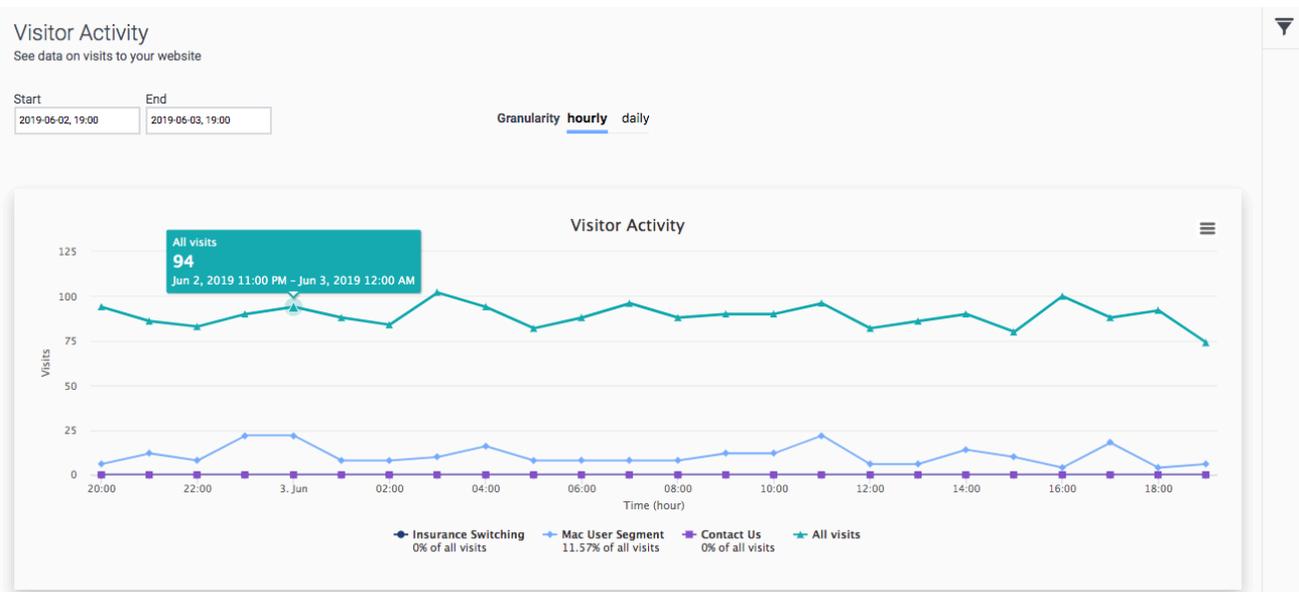

To view details, rest your mouse on a point on the report.

### Export the Visitor Activity report



You can export details of the Visitor Activity report to a CSV (comma-separated value) file.

1. Configure the report so that it displays the data that you want.
2. Download the report. The system downloads the report to your local Downloads folder.

### About time values in exported reports

When you export a Visitor Activity report, the name of the exported file includes from- and to-timestamps in the standard ISO-8601 format (mmhhddmmyyyy).

If you import the CSV file into Excel, use the following formula to convert the ISO-8601 time formatted-cell to the Date type:

**=DATEVALUE(MID(A1,1,10))+TIMEVALUE(MID(A1,12,8))"**

(A1 represents the cell location of the first ISO-8601 time formatted cell in the Excel worksheet.)

# Action map performance

Use the journey action map report from the Performance tab to view the performance of an action map.

## Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Report > View**
  - **Journey > Action Map > View** (to see action maps in the report)

The Journey action maps report displays the performance of your action maps. For example, the number of times an action map qualified to be offered to a visitor. Learn how visitors interacted with a specific action map and which outcome achievements were attributed to each action map.

Use the journey action map performance reports to view the following:

- All the action maps configured in your organization and their overall effectiveness.
- The number of actions that are offered, accepted, blocked, and rejected in each of the action map.
- The number of individual outcomes that are impacted by each action map.
- The number of individual outcomes that are impacted after action map engaged.

To view the report, go to **Performance > Predictive Engagement**, and then **Journey Action Map**. The following report appears.

## Action map performance

Journey Action Maps | Journey Outcomes | Journey Segments

December 28, 2021 - January 26, 2022

### Action Maps

Design when and how your website engages customers. [Configure action maps here](#)

Name	Type	Qualified	Offered	Offered %	Blocked	Accepted	Accepted %	Engaged	Engaged %	Rejected	Rejected %	Outcomes	Outcomes Ach...	Active	Updated
Premium Sports Package Subscription	Web Messaging Offer	720	440	61%	300	18	4%	15	83%	9	2%	1	10	✔	01/27/2022
NFL All Access Pass	Webchat	210	92	43%	120	10	11%	9	90%	1	1%	1	2	✔	01/25/2022
New Subscriber	Content Offer	75	60	80%	20	10	17%	-	-	30	50%	1	5	✔	01/25/2022
VIP Support	Web Messaging Offer	-	-	-	-	-	-	-	-	-	-	-	-	✔	01/25/2022

1 - 4 of 4 action maps

To know about the information available in the different columns of the journey action map reports, see action map report.

For more information about the granular performance of individual action maps, click the action map name. The report specific to the action map opens. For more information about the configuration and the other options within action map reports, see individual action map performance report.

### Action Maps

Design when and how your website engages customers. [Configure action maps here](#)

Name	Type	Qualified	Offered	Offered %	Blocked	Accepted	Accepted %	Engaged	Engaged %	Rejected	Rejected %	Outcomes	Outcomes Ach...	Active	Updated
Premium Sports Package Subscription	Web Messaging Offer	720	440	61%	300	18	4%	15	83%	9	2%	1	10	✔	02/05/2021

Outcome Name	Outcomes Achieved
Subscription	10

To view the individual outcomes that are impacted by each action map, click the maximize arrow mark at the bottom of the outcome number mentioned. The outcomes that are impacted appear.

To view the performance of a specific outcome, click the outcome name. The outcome report appears.

To know more about customization of the report to suit your needs, see customization of journey action map report.

# Outcome performance

Use the outcome journey report from the Performance tab to view the performance of a determined outcome.

## Prerequisites

- Configure the following permissions in Genesys Cloud CX:
  - **Journey > Outcome > Add , Delete, Edit, View**

The Journey outcomes report displays the outcomes that were achieved by a visitor after an engagement. For example, the number of outcomes that were achieved by a visitor using an action map.

To view the report, go to **Performance > Predictive Engagement**, and then **click Journey Outcomes**. The following report appears.

Name	Action Maps	Achieved	Achieved w/ Engagement	Outcome per Engagement %	Segments	Active	Updated
Subscription	4	452	17	11%	4	Active	01/21/2022

To know about the information available in the different columns of the journey outcome report, see outcome report.

## Outcome performance

Outcomes

Identify the business objectives you want to track. [Configure outcomes here](#)

Name	Action Maps	Achieved	Achieved w/ Engagement	Outcome per Engagement %	Segments	Active	Updated
Subscription	4	452	17	11%	4		01/27/2022
Action Map Name		Achieved w/ Engagement					
Premium Sports Package Subscription		10					
New Subscriber		5					

The journey outcome report provides the performance of outcomes. With information available on the performance of the outcomes (with and without engagement), and the action maps and segments that influence them, you can configure the outcomes to suit your business needs.

To view the action maps and segments the outcome is influenced by, click the maximize arrows at the bottom of the respective cell. Click the relevant action map or the segment, and the action map performance report and the segment performance report appear.


To know more about customization of the report to suit your needs, see customization of journey outcome report.

# Segment performance

Use the journey segment report from the Performance tab to view the performance of a segment.

The Journey segments report displays the performance of specific segments of visitors and how well you are engaging them. For example, the number of outcomes that were achieved by session segments and customer segments.

To view the report, go to **Performance > Predictive Engagement**, and then **Journey Segments**. The following report appears.

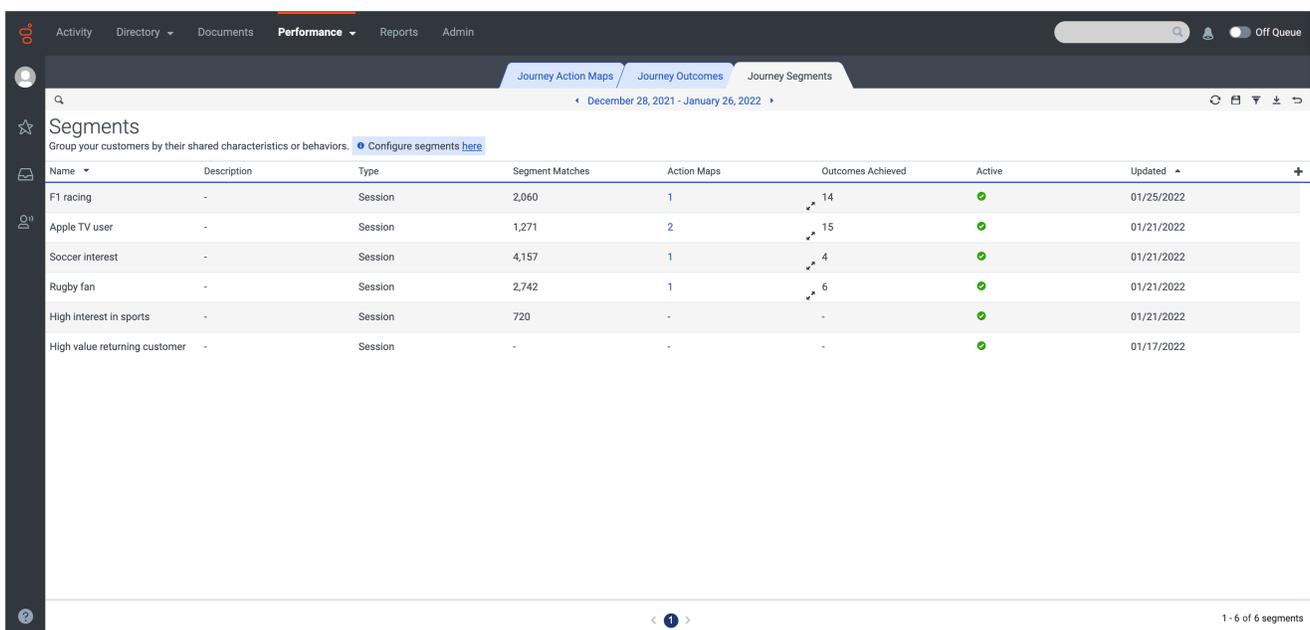

Name	Description	Type	Segment Matches	Action Maps	Outcomes Achieved	Active	Updated
F1 racing	-	Session	2,060	1	14	●	01/25/2022
Apple TV user	-	Session	1,271	2	15	●	01/21/2022
Soccer interest	-	Session	4,157	1	4	●	01/21/2022
Rugby fan	-	Session	2,742	1	6	●	01/21/2022
High interest in sports	-	Session	720	-	-	●	01/21/2022
High value returning customer	-	Session	-	-	-	●	01/17/2022

To know about the information available in the different columns of the journey segment report, see segment report.

## Segment performance

---

### Segments

Group your customers by their shared characteristics or behaviors. [Configure segments here](#)

Name	Description	Type	Segment Matches	Action Maps	Outcomes Achieved	Active	Updated
F1 racing	-	Session	2,060	1	14		11/17/2021
Outcome Name		Outcomes Achieved					
Subscription		14					

Use the journey segment performance report to view a count of segment matches, the action maps that the segment is used in, and the outcomes the segment is achieving. To view the action maps the segment is used in or the outcomes the segment is achieving, click the maximize arrow at the bottom of the respective cell. The action map performance report and outcome performance report appear.

To know more about customization of the report to suit your needs, see customization of journey segment report.

# Billing and usage

## Contents

- [1 About your usage](#)
- [2 View your usage](#)

Understand how you can monitor your usage charges for Genesys Predictive Engagement events.

### Prerequisites

- Any of the following **Billing** permissions:
  - **Billing > All Permissions**
  - **Billing > Subscription > Add**
  - **Billing > Subscription > View**

## About your usage

We price Genesys Predictive Engagement on a per-event basis. Genesys Predictive Engagement currently supports Web events.

## View your usage

Monitor your Genesys Predictive Engagement usage in the **Subscription** section of Genesys Cloud CX.

Usage counts update daily. When you view your usage, you see the total number of events as of the previous day.

For more information about your event pricing, see [View your billing and usage summary](#).

# About compliance

Tracking sensitive customer data requires compliance with GDPR and other regulations.

## Contents

- [1 Compliance](#)

## Compliance

Learn how to use Genesys Predictive Engagement in a compliant manner.

- General Data Protection Regulation (GDPR)
  - About the data we track
-

# General Data Protection Regulation (GDPR)

## Contents

- [1 GDPR compliance](#)
- [2 Genesys Predictive Engagement considerations](#)
- [3 Conditions for consent](#)
- [4 Stop tracking](#)

Learn how to use Genesys Predictive Engagement in a GDPR-compliant way.

### Important

This article only applies to customers using web chat. If you are a Genesys Cloud CX customer, we encourage you to use the new web messaging feature to replace web chat. For web messaging, tracking starts as soon as you deploy Genesys Messenger to your web site. Deployment implies acknowledgment that you are aware of the implications of capturing data.

## GDPR compliance

As part of the Genesys Cloud CX platform, Genesys Predictive Engagement complies with GDPR regulations. For more information about Genesys Cloud CX and GDPR, see [Genesys Cloud CX and GDPR compliance](#).

Genesys Cloud CX provides a GDPR API. The GDPR API is the preferred self-service solution for Genesys Cloud CX customers to respond to GDPR requests. The GDPR API enables responses to data subject requests to access, rectify, or delete their personal data in Genesys Cloud CX.

## Genesys Predictive Engagement considerations

For the purposes of GDPR compliance, Genesys is a data processor on behalf of customers who use the Genesys Predictive Engagement product. You, our customers, are the data controllers of the personal data that you collect from your end customers, the data subjects. This article describes how to adhere to GDPR consent requirements, should you identify consent as the most appropriate lawful basis for processing personal data. Note that there is no 'right' or 'wrong' lawful basis for processing personal data; the GDPR requires that data controllers consider the most appropriate lawful basis. For more information about what to consider when determining the most appropriate lawful basis, see [Lawful basis interactive guidance tool](#).

Genesys Predictive Engagement collects data about visitors' activities on business websites. It uses machine learning and AI to analyze customer-generated events (page views, searches, form-fills, and chats) to determine the probability of a specific customer achieving a specific outcome. An outcome is an event the business wants to maximize or minimize. Example outcomes are making a purchase, signing up for a webinar, or filling out a complex form online. For more information about how Genesys Predictive Engagement uses cookies to track visitor activity on websites, see [Cookies](#).

Businesses use end-customer data that Genesys Predictive Engagement collects for three primary purposes:

- Customer support - proactive or AI-driven engagement through chat and callback offers;
- Sales engagement - proactive or AI engagement through chat, callbacks, and content offers;
- Marketing - proactive or AI; for example, sign-up for an event or webinar through a content offer.

If you are still unsure whether you should obtain the data subject's consent to process their personal data, consult your legal advisor.

### Important

Genesys does not pass end-customer personal data processed through Genesys Predictive Engagement to any advertising or re-targeting companies. End-customer personal data processed through Genesys Predictive Engagement may be shared with business-integrated tools such as Salesforce and Marketo. Sharing only happens when one of our business customers configures that behavior for their organization.

## Conditions for consent

If you identified consent as the most appropriate lawful basis for processing end customer personal data, then the following conditions should be met when obtaining consent:

- You must be able to demonstrate that the data subject has consented to processing of his or her personal data. That means you should maintain a record or audit trail of consent being given.
- If the data subject's consent is given in the context of a written declaration which also concerns other matters, the request for consent shall be presented in a manner which is clearly distinguishable from the other matters, in an intelligible and easily accessible form, using clear and plain language.
- The data subject shall have the right to withdraw his or her consent at any time. The withdrawal of consent shall not affect the lawfulness of processing based on consent before its withdrawal. Prior to giving consent, the data subject shall be informed thereof. It shall be as easy to withdraw as to give consent.
- When assessing whether consent is freely given, utmost account shall be taken of whether, among other things, the performance of a contract, including the provision of a service, is conditional on consent to the processing of personal data that is not necessary for the performance of that contract.

If you identified consent as the most appropriate lawful basis for processing end customer personal data, consider what consent was given before calling the following functions:

- `ac('init', ...)` starts Genesys Predictive Engagement tracking on your website
- `ac('record', ...)` allows Genesys Predictive Engagement tracking of custom visitor actions on your website
- `ac('identify', ...)`, is used to identify visitors

For more information about these functions and others where you might need to

---

consider consent, see [Tracking with Predictive Engagement](#).

### Important

If you require consent to be GDPR-compliant, obtain that consent before passing any personally identifiable data to Genesys Predictive Engagement.

## Stop tracking

For more information about how to stop tracking when a visitor revokes consent, see [Stop tracking if a customer revokes consent](#).

# About the data we track

## Contents

- [1 Transparency about our data tracking practices](#)
- [2 Data we track about each visit](#)
- [3 Data we track about each visitor](#)

Learn how Genesys Predictive Engagement tracks visitor activity on your website.

## Transparency about our data tracking practices

When visitors come to your website, Genesys Predictive Engagement collects data about what they do and where they go on your website. For example, we track which pages each visitor views, any forms they submit, and any searches they complete. We collect this data to improve your understanding of the effectiveness of your website and the needs of your customers.

### Important

- To achieve compliance with GDPR, it's important that you create and implement a tool (for example, message, dialog box) to obtain each visitor's consent to be tracked.
- For more information on using Genesys Predictive Engagement in a GDPR-compliant manner, see General Data Protection Regulation (GDPR).

## Data we track about each visit

Visit information tracked does not contain any personal information related to the visitor, but contains information on their current session.

Data in a visit can include:

- Visit and visitor identifiers that identify visit information within Genesys Predictive Engagement
- Visit timestamps, such as start time, when the visitor is considered idle, and when the visitor was last active
- Current web page information including the number of pages visited, web document properties, and device properties
- Journey information such as matched segments and outcomes achieved
- Referrer information from where the visitor accessed your website, and marketing campaign information associated with it

## Data we track about each visitor

Visitor information contains personal information gathered from submitting data to the Genesys Predictive Engagement system about a specific visitor. Visitor data can include:

- Predictive Engagement-specific identifiers
- Third-party identifiers
- Personal details, such as name, date of birth, job information, and phone numbers
- Predictive Engagement visit information

### Feature coming soon: Web messaging

#### Important

To pass this no-default data to Genesys Predictive Engagement, you need specific JavaScript code on your website.

- If you are a Genesys Cloud CX customer, we encourage you to use the new web messaging feature to replace web chat. For web messaging, configure and deploy messenger.
- For all other customers, copy and deploy the tracking snippet.

# View audit logs

Learn how to view Genesys Predictive Engagement audit logs.

Genesys Predictive Engagement captures events in the audit log. These events include the change history of segments, outcomes, and clickstream settings. For more information about how to view these audits, see [About the audit log viewer](#).

The screenshot displays the Genesys Cloud Admin interface. At the top, there is a navigation bar with tabs for Activity, Directory, Documents, Performance, Reports, and Admin. Below this, the main content area is titled 'Genesys Cloud Admin' and includes a search bar. A sidebar on the left contains navigation links for Account Settings, People & Permissions, Directory, and Integrations. The main content area is divided into four columns: Account Settings, People & Permissions, Directory, and Integrations. Below these columns, there is a table of audit logs for the service 'PredictiveEngagement'. The table has columns for Service Name, Entity, Entity Type, Action, User, and Date and Time. The logs show several 'Update' actions performed by 'John Doe' on 'ClickstreamSettings', 'Outcome', and 'Segment' entities. A 'Delete' action is also shown for a 'Segment' entity. To the right of the table, there is a 'FILTERS' panel with dropdown menus for 'Service', 'Entity Type', and 'Action', and a search box for 'Entity ID'. The top right corner of the interface shows the date 'September 21, 2020' and the time '9:57 AM - 11:58 PM'.

Service Name	Entity	Entity Type	Action	User	Date and Time
PredictiveEngagement	d460a77c-9870-404f-9711-4be1cc247b66	ClickstreamSettings	Update	John Doe	Mon, Sep 21, 2020 3:31 PM
PredictiveEngagement	24ae2566-cdd9-4c67-a167-cf84a9bbbed65	Outcome	Update	John Doe	Mon, Sep 21, 2020 3:30 PM
PredictiveEngagement	24ae2566-cdd9-4c67-a167-cf84a9bbbed65	Outcome	Update	John Doe	Mon, Sep 21, 2020 3:30 PM
PredictiveEngagement	2b35bfe8-71ba-4c5a-9b05-2d4e18354677	Segment	Delete	John Doe	Mon, Sep 21, 2020 3:28 PM
PredictiveEngagement	60e055ad-127f-49e5-9f00-5248a2ae390e	Segment	Update	John Doe	Mon, Sep 21, 2020 2:11 PM
PredictiveEngagement	60e055ad-127f-49e5-9f00-5248a2ae390e	Segment	Update	John Doe	Mon, Sep 21, 2020 2:10 PM

# Genesys Predictive Engagement Administrator FAQs

This page lists all FAQs for Genesys Predictive Engagement administrators.

## GenesysCloud

### What is Genesys Predictive Engagement?

Genesys Predictive Engagement is a cloud-based, AI-powered customer engagement solution that analyzes visitors' behaviors on websites, predicts the outcomes visitors are trying to achieve, and personalizes engagements to help visitors achieve those outcomes.

### What defines a website visit?

A Web visit starts from the moment a visitor lands on a website and provides consent for tracking. The Web visit continues while the visitor browses the website and lasts until the visitor is inactive for 30 minutes. If the visitor resumes browsing after 30 minutes, Genesys Predictive Engagement tracks that activity as a new Web visit.

### Does Genesys Predictive Engagement work on mobile applications?

There is no explicit support for using Genesys Predictive Engagement on mobile apps. On both desktop and mobile browsers, Genesys Predictive Engagement tracks websites only.

## Which data attributes are captured during a customer's journey?

We recognize that every customer's journey is unique and we can capture numerous data attributes. By default, Genesys Predictive Engagement captures page view data from the browser (URL, page title, browser type, location) and uses this information to assign the appropriate segment(s) to the customer.

For a full list of the data attributes we support, see [, , , and .](#)

## What standard reports are provided?

Genesys Predictive Engagement offers two families of reports, both of which can be filtered for a time period:

- The [Performance Report](#) shows web visits and can be filtered based on segments matched and outcomes achieved.
- The [Action Map Report](#) shows the performance of each individual action map triggered.

## Does Genesys Predictive Engagement provide GDPR compliance?

As part of the Genesys Cloud CX platform, Predictive Engagement complies with GDPR regulations. For complete information about Genesys Cloud CX and GDPR, see [Genesys Cloud CX and GDPR compliance](#). See also [Genesys Cloud CX and GDPR compliance](#).

## Does Genesys Predictive Engagement support domain allowlists?

Yes. Customers can [configure domain allowlists](#). This list limits the domains that Genesys Predictive Engagement tracks.

## Does Genesys Predictive Engagement handle IP address blocklists?

You can designate IP addresses for which Genesys Predictive Engagement should not generate web events. For more information, see [IP address blocklists](#).

## Can Genesys Predictive Engagement distinguish between

---

desktop and mobile browsers?

Yes. Audience segmentation takes into account device type. For more information, see

Can Genesys Predictive Engagement distinguish between browser family and OS type?

Yes. Audience segmentation takes into account browser family and OS type. For more information, see

Does Genesys Predictive Engagement support co-browse or screenshare in Genesys Cloud CX?

Genesys Predictive Engagement does not support co-browse or screenshare capabilities of Genesys Cloud CX. If a visitor accepts a proactive chat through Genesys Predictive Engagement, an agent cannot escalate the chat to a co-browse or a screenshare session.

Which languages does Genesys Predictive Engagement support?

The user interface for **Predictive Engagement administrative features** is currently localized in the following languages:

- Dutch
- French
- German
- Italian
- Japanese
- Korean
- Portuguese
- Spanish
- Swedish

The user interface for **Predictive Engagement agent features** is currently localized in the following languages:

- Chinese Simplified

- Chinese Traditional
- Danish
- Dutch
- Finnish
- French
- German
- Italian
- Japanese
- Korean
- Norwegian
- Polish
- Portuguese
- Spanish
- Swedish
- Thai
- Turkish

## How do I increase the offered rate of web chats?

- If you configured an to only show on selected pages, check that the URL condition defined is not restricting chats being offered. Chats are only offered on pages where this condition is met.
- View the report to see how many chats are qualifying outside business hours.
- Other possible reasons for a low offer rate include the availability of agents, service level throttling, frequency capping, conflicting action maps, or action maps qualifying outside business hours.

## How can I increase the number of offers from qualified action maps?

1. Genesys Predictive Engagement applies URL conditions after qualification. Consider removing URL conditions or changing to a more restrictive , such as "contains all."
2. If agents belong to multiple queues, it can impact their availability and Genesys Predictive Engagement's ability to offer a chat.
3. When setting page URL conditions in your segment, ensure that you are not targeting visitors who are about to leave the site. Try adjusting the targeting to a step earlier in their journey. Consider this recommendation when setting page URL conditions in action maps also.

4. Conflicting action maps may prevent offers from occurring as Genesys Predictive Engagement only offers one action map per action type, once per page.

## How can I increase the number of qualifications?

1. Outcomes won't increase the number of qualifications. If using outcome scoring, adjust the outcome probability to a lower level to allow more qualification for that outcome. We recommend having up to 10 outcomes configured. Using outcomes can help increase your conversion rates. For more information, see .
2. Identify traffic sources that are not performing well on conversion rates. Target these sources as segments to see whether chat, content, or bot intervention can help.
3. Ensure that the tracking snippet is on all pages of your site.
4. Configure more custom web events, particularly if your website journey is form-based, that Genesys Predictive Engagement can track to provide more insight for outcome scoring. Also, implement a static rule to always trigger for know pain points. For example, an error message on form submission or an inline validation error.

## Why won't my segments, outcomes, or action maps trigger?

An action map can trigger based on segment or outcome conditions. Genesys Predictive Engagement doesn't validate free form text when configuring segments or outcomes. If you misspell a value here and the segment or outcome is used in an action map, it may not trigger. For example, typing "moble" instead of "mobile" as the device category; or, typing "ACB Retailer" when the page title is "ABC Retailer".

## Why isn't an action map working as expected?

It's possible that the action map's URL conditions aren't configured properly.

Possible causes are:

- There is a configuration issue with the segment or outcome used to trigger the action map
- The page URL conditions defined in the action map itself
- The availability of agents on the queue selected
- The schedules selected
- Visitors leaving the site before the action is offered

For more information, see .

## Can a visitor qualify for an action map more than once within a single session?

When you , you specify the conditions, or triggers, that qualify it for a visitor. A visitor cannot qualify for the same action map multiple times in a single session. If multiple action maps qualify, the priority of each action map determines which one Genesys Predictive Engagement offers to the visitor. For more information, see .

You can trigger action maps based on:

- 
- 
- 

## How does Predictive Engagement ensure that an agent is available to chat with a visitor?

When Genesys Predictive Engagement presents an to a visitor, that offer can include an invitation to speak directly with a live agent assigned to the queue to which the action map routes. Multiple action maps can route to the same target queue.

### Important

- Genesys Predictive Engagement can offer web actions, such as web chats and content offers, every 10 seconds. Visitors may experience a delay in receiving these types of offers.
- Only use the **Route if agents available** option for web chat engagements that you don't intend to route to a bot.
- Multiple action maps can route to the same target queue.
- Genesys Predictive Engagement does not use workforce management (WFM) or Workforce Engagement Management (WEM) data to power the service level throttling / "Route to agent if available" feature. For Genesys Cloud CX customers, Genesys Predictive Engagement uses the real-time presence status of agents that the analytics APIs provide. The status is available for all Genesys Cloud CX customers and the WFM or WEM features do not impact it directly.

Genesys Predictive Engagement allows chat offers when the following

criteria are met:

- Action map conditions are met.
- URL conditions are verified.
- allows the chat. By default, throttling aims to have 80% of chats answered within 20 seconds.
  - For Genesys Engage on-premises customers only, the determines agent availability.
- Agents are on queue.
- Chat is within hours.

Genesys Predictive Engagement calculates the **service level** based on the queue's configuration in Genesys Cloud CX.

## How to stop tracking if a visitor revokes consent

For more information about how to stop tracking when a visitor revokes consent, see

## Why are all the qualified actions not offered?

The **Blocked Actions** report lists the reasons for the qualified action not being offered. Next to each reason the action is blocked, the following details appear:

- Sessions - The number of sessions during which the action is blocked. If an action is blocked multiple times during a single session, the session number is retained at one.
- Count - The number of times an action is blocked. For example, if an action was blocked 30 times during a single session, the count number is 30.

Reason	Description
Page URL condition	The action map did not meet the page URL filters specified in the action map. For more information, see .
SLA throttle	The queue was saturated to capacity which prevented the action being offered. For more information, see .
Existing offer	An offer had already been rolled out to the customer at the time the action map qualified.
Future offer	The action map specifies the future time period for the action to be offered and the action is not set to 'Immediately'. For more information, see , , and .
Multiple offers	The customer qualified for more than one action

Reason	Description
	and received an offer in another action with a higher priority than this action. If all action maps have the same priority, the actions are offered in no particular order. For more information, see .
No agents	The action map specifies that the action be offered only upon agent availability. For more information, see .
Frequency cap	The visitor qualifies for and receives an offer on another action map. For more information, see .

## GenesysEngage

### What is Genesys Predictive Engagement?

Genesys Predictive Engagement is a cloud-based, AI-powered customer engagement solution that analyzes visitors' behaviors on websites, predicts the outcomes visitors are trying to achieve, and personalizes engagements to help visitors achieve those outcomes.

### What defines a website visit?

A Web visit starts from the moment a visitor lands on a website and provides consent for tracking. The Web visit continues while the visitor browses the website and lasts until the visitor is inactive for 30 minutes. If the visitor resumes browsing after 30 minutes, Genesys Predictive Engagement tracks that activity as a new Web visit.

### Does Genesys Predictive Engagement work on mobile applications?

There is no explicit support for using Genesys Predictive Engagement on mobile apps. On both desktop and mobile browsers, Genesys Predictive Engagement tracks websites only.

## Which data attributes are captured during a customer's journey?

We recognize that every customer's journey is unique and we can capture numerous data attributes. By default, Genesys Predictive Engagement captures page view data from the browser (URL, page title, browser type, location) and uses this information to assign the appropriate segment(s) to the customer.

For a full list of the data attributes we support, see [, , , and .](#)

## What standard reports are provided?

Genesys Predictive Engagement offers two families of reports, both of which can be filtered for a time period:

- The [Performance Report](#) shows web visits and can be filtered based on segments matched and outcomes achieved.
- The [Action Map Report](#) shows the performance of each individual action map triggered.

## Does Genesys Predictive Engagement provide GDPR compliance?

As part of the Genesys Cloud CX platform, Predictive Engagement complies with GDPR regulations. For complete information about Genesys Cloud CX and GDPR, see [Genesys Cloud CX and GDPR compliance](#). See also [GDPR](#).

## Does Genesys Predictive Engagement support domain allowlists?

Yes. Customers can [configure domain allowlists](#). This list limits the domains that Genesys Predictive Engagement tracks.

## Does Genesys Predictive Engagement handle IP address blocklists?

You can designate IP addresses for which Genesys Predictive Engagement should not generate web events. For more information, see [IP Address Blocklists](#).

## Can Genesys Predictive Engagement distinguish between

---

## desktop and mobile browsers?

Yes. Audience segmentation takes into account device type. For more information, see

## Can Genesys Predictive Engagement distinguish between browser family and OS type?

Yes. Audience segmentation takes into account browser family and OS type. For more information, see

## Which languages does Genesys Predictive Engagement support?

The user interface for **Predictive Engagement administrative features** is currently localized in the following languages:

- Dutch
- French
- German
- Italian
- Japanese
- Korean
- Portuguese
- Spanish
- Swedish

The user interface for **Predictive Engagement agent features** is currently localized in the following languages:

- Chinese Simplified
- Chinese Traditional
- Danish
- Dutch
- Finnish
- French
- German
- Italian

- Japanese
- Korean
- Norwegian
- Polish
- Portuguese
- Spanish
- Swedish
- Thai
- Turkish

## How can I increase the number of offers from qualified action maps?

1. Genesys Predictive Engagement applies URL conditions after qualification. Consider removing URL conditions or changing to a more restrictive , such as "contains all."
2. If agents belong to multiple queues, it can impact their availability and Genesys Predictive Engagement's ability to offer a chat.
3. When setting page URL conditions in your segment, ensure that you are not targeting visitors who are about to leave the site. Try adjusting the targeting to a step earlier in their journey. Consider this recommendation when setting page URL conditions in action maps also.
4. Conflicting action maps may prevent offers from occurring as Genesys Predictive Engagement only offers one action map per action type, once per page.

## How can I increase the number of qualifications?

1. Outcomes won't increase the number of qualifications. If using outcome scoring, adjust the outcome probability to a lower level to allow more qualification for that outcome. We recommend having up to 10 outcomes configured. Using outcomes can help increase your conversion rates. For more information, see .
2. Identify traffic sources that are not performing well on conversion rates. Target these sources as segments to see whether chat, content, or bot intervention can help.
3. Ensure that the tracking snippet is on all pages of your site.
4. Configure more custom web events, particularly if your website journey is form-based, that Genesys Predictive Engagement can track to provide more insight for outcome scoring. Also, implement a static rule to always trigger for know pain points. For example, an error message on form submission or an inline validation error.

## Why won't my segments, outcomes, or action maps trigger?

An action map can trigger based on segment or outcome conditions. Genesys Predictive Engagement doesn't validate free form text when configuring segments or outcomes. If you misspell a value here and the segment or outcome is used in an action map, it may not trigger. For example, typing "moble" instead of "mobile" as the device category; or, typing "ACB Retailer" when the page title is "ABC Retailer".

## Why isn't an action map working as expected?

It's possible that the action map's URL conditions aren't configured properly.

Possible causes are:

- There is a configuration issue with the segment or outcome used to trigger the action map
- The page URL conditions defined in the action map itself
- The availability of agents on the queue selected
- The schedules selected
- Visitors leaving the site before the action is offered

For more information, see .

## Can a visitor qualify for an action map more than once within a single session?

When you , you specify the conditions, or triggers, that qualify it for a visitor. A visitor cannot qualify for the same action map multiple times in a single session. If multiple action maps qualify, the priority of each action map determines which one Genesys Predictive Engagement offers to the visitor. For more information, see .

You can trigger action maps based on:

- 
- 
-

## How does Predictive Engagement ensure that an agent is available to chat with a visitor?

When Genesys Predictive Engagement presents an offer to a visitor, that offer can include an invitation to speak directly with a live agent assigned to the queue to which the action map routes. Multiple action maps can route to the same target queue.

### Important

- Genesys Predictive Engagement can offer web actions, such as web chats and content offers, every 10 seconds. Visitors may experience a delay in receiving these types of offers.
- Only use the **Route if agents available** option for web chat engagements that you don't intend to route to a bot.
- Multiple action maps can route to the same target queue.
- Genesys Predictive Engagement does not use workforce management (WFM) or Workforce Engagement Management (WEM) data to power the service level throttling / "Route to agent if available" feature. For Genesys Cloud CX customers, Genesys Predictive Engagement uses the real-time presence status of agents that the analytics APIs provide. The status is available for all Genesys Cloud CX customers and the WFM or WEM features do not impact it directly.

Genesys Predictive Engagement allows chat offers when the following criteria are met:

- Action map conditions are met.
- URL conditions are verified.
- allows the chat. By default, throttling aims to have 80% of chats answered within 20 seconds.
  - For Genesys Engage on-premises customers only, the determines agent availability.
- Agents are on queue.
- Chat is within hours.

Genesys Predictive Engagement calculates the **service level** based on the queue's configuration in Genesys Cloud CX.

## How to stop tracking if a visitor revokes consent

For more information about how to stop tracking when a visitor revokes consent, see

## Why are all the qualified actions not offered?

The **Blocked Actions** report lists the reasons for the qualified action not being offered. Next to each reason the action is blocked, the following details appear:

- Sessions - The number of sessions during which the action is blocked. If an action is blocked multiple times during a single session, the session number is retained at one.
- Count - The number of times an action is blocked. For example, if an action was blocked 30 times during a single session, the count number is 30.

Reason	Description
Page URL condition	The action map did not meet the page URL filters specified in the action map. For more information, see .
SLA throttle	The queue was saturated to capacity which prevented the action being offered. For more information, see .
Existing offer	An offer had already been rolled out to the customer at the time the action map qualified.
Future offer	The action map specifies the future time period for the action to be offered and the action is not set to 'Immediately'. For more information, see , , and .
Multiple offers	The customer qualified for more than one action and received an offer in another action with a higher priority than this action. If all action maps have the same priority, the actions are offered in no particular order. For more information, see .
No agents	The action map specifies that the action be offered only upon agent availability. For more information, see .
Frequency cap	The visitor qualifies for and receives an offer on another action map. For more information, see .

## PureConnect

### What is Genesys Predictive Engagement?

Genesys Predictive Engagement is a cloud-based, AI-powered customer engagement solution that analyzes visitors' behaviors on websites, predicts the outcomes visitors are trying to achieve, and personalizes engagements to help visitors achieve those outcomes.

### What defines a website visit?

A Web visit starts from the moment a visitor lands on a website and provides consent for tracking. The Web visit continues while the visitor browses the website and lasts until the visitor is inactive for 30 minutes. If the visitor resumes browsing after 30 minutes, Genesys Predictive Engagement tracks that activity as a new Web visit.

### Does Genesys Predictive Engagement work on mobile applications?

There is no explicit support for using Genesys Predictive Engagement on mobile apps. On both desktop and mobile browsers, Genesys Predictive Engagement tracks websites only.

### Which data attributes are captured during a customer's journey?

We recognize that every customer's journey is unique and we can capture numerous data attributes. By default, Genesys Predictive Engagement captures page view data from the browser (URL, page title, browser type, location) and uses this information to assign the appropriate segment(s) to the customer.

For a full list of the data attributes we support, see [Table 1](#), [Table 2](#), and [Table 3](#).

### What standard reports are provided?

Genesys Predictive Engagement offers two families of reports, both of which can be filtered for a time period:

- The [Web Visits Report](#) shows web visits and can be filtered based on segments matched and outcomes achieved.

- The shows the performance of each individual action map triggered.

## Does Genesys Predictive Engagement provide GDPR compliance?

As part of the Genesys Cloud CX platform, Predictive Engagement complies with GDPR regulations. For complete information information about Genesys Cloud CX and GDPR, see [Genesys Cloud CX and GDPR compliance](#). See also .

## Does Genesys Predictive Engagement support domain allowlists?

Yes. Customers can . This list limits the domains that Genesys Predictive Engagement tracks.

## Does Genesys Predictive Engagement handle IP address blocklists?

You can designate IP addresses for which Genesys Predictive Engagement should not generate web events. For more information, see .

## Can Genesys Predictive Engagement distinguish between desktop and mobile browsers?

Yes. Audience segmentation takes into account device type. For more information, see

## Can Genesys Predictive Engagement distinguish between browser family and OS type?

Yes. Audience segmentation takes into account browser family and OS type. For more information, see

## Does Genesys Predictive Engagement support co-browse or

---

## screenshare in Genesys Cloud CX?

Genesys Predictive Engagement does not support co-browse or screenshare capabilities of Genesys Cloud CX. If a visitor accepts a proactive chat through Genesys Predictive Engagement, an agent cannot escalate the chat to a co-browse or a screenshare session.

## Which languages does Genesys Predictive Engagement support?

The user interface for **Predictive Engagement administrative features** is currently localized in the following languages:

- Dutch
- French
- German
- Italian
- Japanese
- Korean
- Portuguese
- Spanish
- Swedish

The user interface for **Predictive Engagement agent features** is currently localized in the following languages:

- Chinese Simplified
- Chinese Traditional
- Danish
- Dutch
- Finnish
- French
- German
- Italian
- Japanese
- Korean
- Norwegian
- Polish
- Portuguese
- Spanish

- Swedish
- Thai
- Turkish

## How can I increase the number of offers from qualified action maps?

1. Genesys Predictive Engagement applies URL conditions after qualification. Consider removing URL conditions or changing to a more restrictive , such as "contains all."
2. If agents belong to multiple queues, it can impact their availability and Genesys Predictive Engagement's ability to offer a chat.
3. When setting page URL conditions in your segment, ensure that you are not targeting visitors who are about to leave the site. Try adjusting the targeting to a step earlier in their journey. Consider this recommendation when setting page URL conditions in action maps also.
4. Conflicting action maps may prevent offers from occurring as Genesys Predictive Engagement only offers one action map per action type, once per page.

## How can I increase the number of qualifications?

1. Outcomes won't increase the number of qualifications. If using outcome scoring, adjust the outcome probability to a lower level to allow more qualification for that outcome. We recommend having up to 10 outcomes configured. Using outcomes can help increase your conversion rates. For more information, see .
2. Identify traffic sources that are not performing well on conversion rates. Target these sources as segments to see whether chat, content, or bot intervention can help.
3. Ensure that the tracking snippet is on all pages of your site.
4. Configure more custom web events, particularly if your website journey is form-based, that Genesys Predictive Engagement can track to provide more insight for outcome scoring. Also, implement a static rule to always trigger for know pain points. For example, an error message on form submission or an inline validation error.

## Why won't my segments, outcomes, or action maps trigger?

An action map can trigger based on segment or outcome conditions. Genesys Predictive Engagement doesn't validate free form text when configuring segments or outcomes. If you misspell a value here and the segment or outcome is used in an action map, it may not trigger. For example, typing "moble" instead of "mobile" as the device category; or, typing "ACB Retailer" when the page title is "ABC Retailer".

## Why isn't an action map working as expected?

It's possible that the action map's URL conditions aren't configured properly.

Possible causes are:

- There is a configuration issue with the segment or outcome used to trigger the action map
- The page URL conditions defined in the action map itself
- The availability of agents on the queue selected
- The schedules selected
- Visitors leaving the site before the action is offered

For more information, see .

## Can a visitor qualify for an action map more than once within a single session?

When you , you specify the conditions, or triggers, that qualify it for a visitor. A visitor cannot qualify for the same action map multiple times in a single session. If multiple action maps qualify, the priority of each action map determines which one Genesys Predictive Engagement offers to the visitor. For more information, see .

You can trigger action maps based on:

- 
- 
- 

## How does Predictive Engagement ensure that an agent is available to chat with a visitor?

When Genesys Predictive Engagement presents an to a visitor, that offer can include an invitation to speak directly with a live agent assigned to the queue to which the action map routes. Multiple action maps can route to the same target queue.

**Important**

- Genesys Predictive Engagement can offer web actions, such as web chats and content offers, every 10 seconds. Visitors may experience a delay in receiving these types of offers.
- Only use the **Route if agents available** option for web chat engagements that you don't intend to route to a bot.
- Multiple action maps can route to the same target queue.
- Genesys Predictive Engagement does not use workforce management (WFM) or Workforce Engagement Management (WEM) data to power the service level throttling / "Route to agent if available" feature. For Genesys Cloud CX customers, Genesys Predictive Engagement uses the real-time presence status of agents that the analytics APIs provide. The status is available for all Genesys Cloud CX customers and the WFM or WEM features do not impact it directly.

Genesys Predictive Engagement allows chat offers when the following criteria are met:

- Action map conditions are met.
- URL conditions are verified.
- allows the chat. By default, throttling aims to have 80% of chats answered within 20 seconds.
  - For Genesys Engage on-premises customers only, the determines agent availability.
- Agents are on queue.
- Chat is within hours.

Genesys Predictive Engagement calculates the **service level** based on the queue's configuration in Genesys Cloud CX.

## How to stop tracking if a visitor revokes consent

For more information about how to stop tracking when a visitor revokes consent, see

## Why are all the qualified actions not offered?

The **Blocked Actions** report lists the reasons for the qualified action not being offered. Next to each reason the action is blocked, the following details appear:

- Sessions - The number of sessions during which the action is blocked. If an action is blocked multiple times during a single session, the session number is retained at one.
- Count - The number of times an action is blocked. For example, if an action was blocked 30 times during a single session, the count number is 30.

Reason	Description
Page URL condition	The action map did not meet the page URL filters specified in the action map. For more information, see .
SLA throttle	The queue was saturated to capacity which prevented the action being offered. For more information, see .
Existing offer	An offer had already been rolled out to the customer at the time the action map qualified.
Future offer	The action map specifies the future time period for the action to be offered and the action is not set to 'Immediately'. For more information, see , , and .
Multiple offers	The customer qualified for more than one action and received an offer in another action with a higher priority than this action. If all action maps have the same priority, the actions are offered in no particular order. For more information, see .
No agents	The action map specifies that the action be offered only upon agent availability. For more information, see .
Frequency cap	The visitor qualifies for and receives an offer on another action map. For more information, see .