

GENESYS

This PDF is generated from authoritative online content, and is provided for convenience only. This PDF cannot be used for legal purposes. For authoritative understanding of what is and is not supported, always use the online content. To copy code samples, always use the online content.

Voice Microservices Events and Models Reference

Basic call models

Contents

- 1 Simple call model
- 2 Connection-establishing phase for an internal/inbound call
 - 2.1 Abnormal call flow
- 3 Connection-establishing phase for an internal/inbound call to ACD
 - 3.1 Abnormal call flow
- · 4 Connection-establishing phase for an internal/inbound call queued to multiple ACDs
 - 4.1 Abnormal call flow
- 5 Connection-establishing phase for an internal/inbound call with call parking
 - 5.1 Abnormal call flow
- 6 Connection-establishing phase for internal/inbound call with routing (RouteQueue case)
 - 6.1 Abnormal call flow
- 7 Connection-establishing phase for internal/inbound call with routing
 - 7.1 Abnormal call flow
- · 8 Connection-establishing phase for an internal/inbound call with routing outbound
 - 8.1 Abnormal call flow
- 9 Connection-establishing phase for an outbound call
 - 9.1 Abnormal call flow
- 10 Connection-establishing phase while on hold (internal/outbound call)

This page describes the basic scenarios in which calls arrive in a contact center.

Related documentation:

- •
- •

RSS:


• For private edition

For simplicity, the examples on this page use abbreviated attribute values. For example, ConnID **1**, which – in actual events – displays as ConnID>@metainformation>.

The following comments and abbreviations are used in the call models:

- OPT—Optional.
- DIAL—Might be a dialed number or is not present if Voice Microservices have no information about the other party.

Simple call model

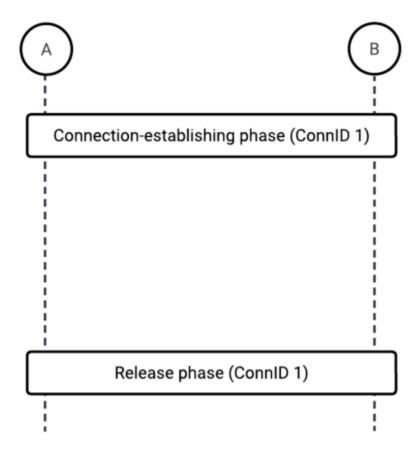

Connection-establishing phase for an internal/inbound call

The following table describes the connection-establishing phase for an internal/inbound call.

Party A	Party B
Make call to B (TMakeCall)	
EventDialing ConnID 1 ThisDN A ThisDNRole Origination OtherDN *DIAL OtherDNRole Destination *DIAL	
	EventRinging ConnID 1 ThisDN B ThisDNRole Destination

	OtherDN A OtherDNRole Origination CallState OK	
	Answer (TAnswerCall)	
EventEstablished ConnID 1 ThisDN A ThisDNRole Origination OtherDN B OtherDNRole Destination	EventEstablished ConnID 1 ThisDN B ThisDNRole Destination OtherDN A OtherDNRole Origination	
Conversation		

Interruption point	Party A	Party B
*	EventReleased ConnID 1 ThisDN A ThisDNRole Origination CallState OK	
**	EventDestinationBusy ConnID 1 ThisDN A ThisDNRole Origination CallState a	
***	EventReleased ConnID 1 ThisDN A ThisDNRole Origination OtherDN B *DIAL OtherDNRole Destination *DIAL CallState OK	EventAbandoned ConnID 1 ThisDN B OtherDN A CallState OK

a. CallState might have values that clarify the reason for the destination being busy, for instance CallState SitInvalidNum.

Connection-establishing phase for an internal/inbound call to ACD

The following table describes the connection-establishing phase for an internal/inbound call to ACD.

Party A	Party B (ACD Group)	Party C
Make call to B		

EventDialing ConnID 1 ThisDN A ThisDNRole Origination OtherDN B *DIAL OtherDNRole Destination *DIAL	EventQueued ConnID 1 ThisDN B ThisQueue B ThisDNRole Destination OtherDN A OtherDNRole Origination	
	Diverts call to C	
	ConnID 1 ThisDN B ThisQueue B ThisDNRole Destination OtherDN A OtherDNRole Origination ThirdPartyDN C *OPT ThirdPartyDNRole Destination *OPT	
		EventRinging ConnID 1 ThisDN C ThisQueue B ThisDNRole Destination OtherDN A OtherDN AO OtherDNRole Origination CallState OK
		Answer (TAnswerCall)
EventEstablished ConnID 1 ThisDN A ThisDNRole Origination OtherDN C OtherDNRole Destination		EventEstablished ConnID 1 ThisDN C ThisQueue B ThisDNRole Destination OtherDN A OtherDNRole Origination
	Conversation	

Interruption point	Party A	Party B	Party C
*	EventReleased ConnID 1 ThisDN A OtherDN B CallState OK	EventAbandoned ConnID 1 ThisDN B OtherDN A CallState OK	
**	EventReleased ConnID 1 ThisDN A OtherDN B CallState OK		
***	EventReleased		EventAbandoned

ConnID 1 ThisDN A OtherDN C CallState OK	ConnID 1 ThisDN C OtherDN A CallState OK
--	--

Connection-establishing phase for an internal/inbound call queued to multiple ACDs

The following table describes the connection-establishing phase for an internal/inbound call queued to multiple ACDs.

Party A	Party B (ACD)	Party C (ACD)	Party D
Make internal/ inbound call to B (ACD)	Tanty 2 (Ato2)		
EventDialing ConnID 1 ThisDN A ThisDNRole Origination OtherDN B *DIAL OtherDNRole Destination *DIAL	EventQueued ConnID 1 ThisDN B ThisQueue B ThisDNRole Destination OtherDN A OtherDNRole Origination		
		ConnID 1 ThisDN C ThisQueue C ThisDNRole Destination OtherDN A OtherDNRole Origination	
	Diverts call to D		
	EventDiverted ConnID 1 ThisDN B ThisDNRole Origination OtherDN C OtherDNRole Destination	ConnID 1 ThisDN C ThisQueue C ThirdPartyDN D ThirdPartyQueue B CallState Redirected a	
			EventRinging ConnID 1 ThisDN D ThisQueue B ThisDNRole Destination OtherDN A OtherDNRole Origination CallState OK
			Answer (TAnswerCall)

EventEstablished ConnID 1 ThisDN A ThisDNRole Origination OtherDN D OtherDNRole Destination CallState OK			EventEstablished ConnID 1 ThisDN D ThisDNRole Destination OtherDN A OtherDNRole Origination CallState OK
Conversation			

a. For ACD configurations where calls are distributed to agents assigned directly to ACD groups, CallState with a value of Redirected is present. For ACD configurations where calls are distributed to agents assigned to secondary ACD groups associated with top-level ACD queues, the CallState, with the value Redirected, is not present.

Abnormal call flow

Interruption point	Party A	Party B	Party C	Party D
*	EventReleased ConnID 1 ThisDN A OtherDN B CallState OK	EventAbandoned ConnID 1 ThisDN B ThisQueue B OtherDN A CallState OK		
**	EventReleased ConnID 1 ThisDN A OtherDN B CallState OK	EventAbandoned ConnID 1 ThisDN B ThisQueue B OtherDN A CallState OK	ConnID 1 ThisDN C ThisQueue C OtherDN A CallState OK	
***	EventReleased ConnID 1 ThisDN A OtherDN D CallState OK			
***	EventReleased ConnID 1 ThisDN A OtherDN D CallState OK			EventAbandoned ConnID 1 ThisDN D ThisQueue C OtherDN A CallState OK

Connection-establishing phase for an internal/inbound call with call parking

The following table describes the connection-establishing phase for an internal/inbound call with call

parking.

Party A	Party B
Make call to B (TMakeCall)	
EventDialing	
ConnID 1 ThisDN A ThisDNRole Origination OtherDN B *DIAL OtherDNRole Destination *DIAL	
	Call is parked on B
EventDestinationBusy *OPT	EventQueued
ConnID 1 ThisDN A ThisDNRole Origination OtherDN B *DIAL OtherDNRole Destination *DIAL	ConnID 1 ThisDN B ThisDNRole Destination OtherDN A OtherDNRole Origination CallState OK Call is picked up by B
	EventRinging ConnID 1 ThisDN B ThisDNRole Destination OtherDN A OtherDNRole Origination CallState OK
	Answer (TAnswerCall)
EventEstablished	EventEstablished
ConnID 1 ThisDN A ThisDNRole Origination OtherDN B OtherDNRole Destination	ConnID 1 ThisDN B ThisDNRole Destination OtherDN A OtherDNRole Origination
Conver	rsation

Abnormal call flow

Interruption point	Party A	Party B
*	EventReleased ConnID 1 ThisDN A ThisDNRole Origination OtherDN B *DIAL OtherDNRole Destination *DIAL CallState OK	EventAbandoned ConnID 1 ThisDN B OtherDN A CallState OK

Connection-establishing phase for internal/inbound call with routing (RouteQueue case)

The following table describes the connection-establishing phase for an internal/inbound call with routing (RouteQueue case).

Party A	Party B (Routing Point/CDN)	Party C
Make incoming call to information service		
EventDialing ConnID 1 ThisDN A ThisDNRole Origination OtherDN B OtherDNRole Destination	ConnID 1 ThisDN B ThisQueue B ThisDNRole Destination OtherDN A OtherDNRole Origination EventRouteRequest ConnID 1 ThisDN B ThisQueue B ThisDNRole Destination OtherDN A OtherDNRole Origination	
	Route call to C ^a (TRouteCall)	
	ConnID 1 ThisDN B ThisDNRole Destination OtherDN A OtherDNRole Origination ThirdPartyDNRole Destination *OPT ThirdPartyDNRole Destination EventDiverted ConnID 1 ThisDN B ThisQueue B ThisDNRole Destination OtherDN A OtherDNRole Origination ThirdPartyDNRole Origination ThirdPartyDN C *OPT ThirdPartyDNRole Destination *OPT	
		EventRinging ConnID 1 ThisDN C ThisQueue B ThisDNRole Destination OtherDN A OtherDNRole Origination CallState OK
		Answer (TAnswerCall)
EventEstablished		EventEstablished

ConnID 1 ThisDN A ThisDNRole Origination OtherDN C OtherDNRole Destination		ConnID 1 ThisDN C ThisDNRole Destination OtherDN A OtherDNRole Origination
	Conversation	

a. RouteCall to C (TRouteCall()) might be missing.

Abnormal call flow

Interruption point	Party A	Party B	Party C
* and **	EventReleased ConnID 1 ThisDN A OtherDN B CallState OK	EventAbandoned ConnID 1 ThisDN B OtherDN A CallState OK	
***	EventReleased ConnID 1 ThisDN A OtherDN C CallState OK		
***	EventReleased ConnID 1 ThisDN A OtherDN C CallState OK		EventAbandoned ConnID 1 ThisDN C OtherDN A CallState OK

Connection-establishing phase for internal/inbound call with routing

The following table describes the connection-establishing phase for an internal/inbound call with routing.

Party A	Party B (Routing Point/CDN)	Party C
Make incoming call to information service		
EventDialing ConnID 1 ThisDN A ThisDNRole Origination OtherDN B *DIAL OtherDNRole Destination *DIAL	EventRouteRequest ConnID 1 ThisDN B ThisDNRole Destination OtherDN A OtherDNRole Origination	

	Route call to C ^a (TRouteCall)	
	EventRouteUsed	
	ConnID 1 ThisDN B ThisDNRole Destination OtherDN A OtherDNRole Origination ThirdPartyDN C ThirdPartyDNRole Destination *OPT CallState OK/Redirected C	
		EventRinging
		ConnID 1 ThisDN C ThisDNRole Destination OtherDN A OtherDNRole Origination CallState OK
		Answer (TAnswerCall)
EventEstablished		EventEstablished
ConnID 1 ThisDN A ThisDNRole Origination OtherDN C OtherDNRole Destination		ConnID 1 ThisDN C ThisDNRole Destination OtherDN A OtherDNRole Origination
	Conversation	

- a. Not present if a call has been routed by default; that is, a switch did not receive any routing instruction from a computer domain within a timeout configured on the switch side (scripted or otherwise) and therefore processed the call using switch logic.
- b. Content of **ThirdPartyDN** depends on the call scenario:
 - If information about the destination is available at the moment EventRouteUsed is generated, this attribute is mandatory; a DN where the call has been delivered must be reported.
 - If the information is not available, but the call has been routed through Voice Microservices, this attribute is mandatory; a DN where the call has been sent must be reported.
 - If a call has been routed to a default destination or routed by another application, this attribute is optional (depends on switch capabilities).
- c. **CallState** has a value of Redirected (22) if a call has been routed by a switch. For some switches, the attribute **Callstate** might not be present.

Interruption point	Party A	Party B	Party C
	EventReleased	EventAbandoned	
*	ConnID 1 ThisDN A OtherDN B	ConnID 1 ThisDN B OtherDN A	

	CallState OK	CallState OK	
**	ConnID 1 ThisDN A OtherDN C CallState OK	EventAbandoned ^a ConnID 1 ThisDN B OtherDN A CallState OK	
***	EventReleased ConnID 1 ThisDN A OtherDN C CallState OK		
****	ConnID 1 ThisDN A OtherDN C CallState OK		EventAbandoned ConnID 1 ThisDN C OtherDN A CallState OK

a. In this case, EventError must be sent after EventAbandoned to make the ReferenceID available.

Connection-establishing phase for an internal/inbound call with routing outbound

The following table describes the connection-establishing phase for an internal/inbound call with routing outbound.

Party A	Party B (Routing Point)	Party C
Incoming call		
EventDialing	EventRouteRequest	
ConnID 1 ThisDN A ThisDNRole Origination OtherDN B *DIAL OtherDNRole Destination *DIAL	ConnID 1 ThisDN B ThisDNRole Destination OtherDN A OtherDNRole Origination	
	Route call to C ^a (TRouteCall)	
EventNetworkReached ConnID 1 ThisDN A ThisDNRole Origination OtherDN C *DIAL OtherDNRole Destination *DIAL	ConnID 1 ThisDN B ThisDNRole Destination OtherDN A OtherDNRole Origination ThirdPartyDN C ThirdPartyDNRole Destination *OPT CallState OK/Redirected C	EventRinging ConnID 1 ThisDN C ThisDNRole Destination OtherDN A OtherDNRole Origination CallState OK

	Answer (TAnswerCall)	
EventEstablished	EventEstablished	
ConnID 1 ThisDN A ThisDNRole Origination OtherDN C OtherDNRole Destination	ConnID 1 ThisDN C ThisDNRole Destination OtherDN A OtherDNRole Origination	
Conversation		

- a. Not present if a call has been routed by default; that is, a switch did not receive any routing instruction from a computer domain within a timeout configured on the switch side (scripted or otherwise) and therefore processed the call using switch logic.
- b. Content of **ThirdPartyDN** depends on the call scenario:
 - If information about the destination is available at the moment EventRouteUsed is generated, this attribute is mandatory; a DN where the call has been delivered must be reported.
 - If the information is not available, but the call has been routed through Voice Microservices, this attribute is mandatory; a DN where the call has been sent must be reported.
 - If a call has been routed to a default destination or routed by another application, this attribute is optional (depends on switch capabilities).
- c. **CallState** has a value of Redirected (22) if a call has been routed by a switch. For some switches, the attribute **CallState** might not be present.

Interruption point	Party A	Party B	Party C
*	EventReleased ConnID 1 ThisDN A OtherDN B CallState OK	EventAbandoned ConnID 1 ThisDN B OtherDN A CallState OK	
**	ConnID 1 ThisDN A OtherDN C CallState OK		EventAbandoned ConnID 1 ThisDN C OtherDN A CallState OK

Connection-establishing phase for an outbound call

The following table describes the connection-establishing phase for an outbound call.

Party A	Party B
Make outside call (TMakeCall)	
EventDialing	

ConnID 1 ThisDN A ThisDNRole Origination OtherDN B *DIAL OtherDNRole Destination *DIAL	
EventNetworkReached ^a ConnID 1 ThisDN A ThisDNRole Origination OtherDN B *DIAL OtherDNRole Destination *DIAL	
	Answer
EventEstablished ConnID 1 ThisDN A ThisDNRole Origination OtherDN B *OPT OtherDNRole Destination *OPT	
Conve	rsation

a. When a switch does not report network reached, Voice Microservices simulate EventNetworkReached right before distributing EventEstablished.

Abnormal call flow

Interruption point	Party A
*	EventReleased ConnID 1 ThisDN A OtherDN B CallState OK
**	EventDestinationBusy ConnID 1 ThisDN A OtherDN B CallState a
***	EventReleased ConnID 1 ThisDN A OtherDN B CallState OK

a. CallState might have values that clarify the reason for the destination being busy, for instance CallStateSitInvalidNum.

Connection-establishing phase while on hold (internal/outbound call)

The following table describes the connection-establishing phase for an internal/outbound call while on hold.

Party A	Party B
Call to B	
EventDialing	EventRinging
ConnID 1 ThisDN A ThisDNRole Origination OtherDN B OtherDNRole Destination CallState OK	ConnID 1 ThisDN B ThisDNRole Destination OtherDN A OtherDNRole Origination CallState OK
Hold	
EventHeld	
ConnID 1 ThisDN A OtherDN B	
	Answer
EventEstablished	EventEstablished
ConnID 1 ThisDN A OtherDN B	ConnID 1 ThisDN B OtherDN A
Retrieve	
EventRetrieved	
ConnID 1 ThisDN A OtherDN B CallState OK	