



This PDF is generated from authoritative online content, and is provided for convenience only. This PDF cannot be used for legal purposes. For authoritative understanding of what is and is not supported, always use the online content. To copy code samples, always use the online content.

Designer User's Guide

Bot Registry

12/17/2025

Contents

- 1 Before you start
 - 1.1 Supported bot service providers
- 2 Adding a bot resource to the registry
- 3 Adding a Google Dialogflow CX bot to the registry
- 4 Adding a Google Dialogflow ES bot to the registry
 - 4.1 Wait Conversation End
- 5 Adding an Amazon Lex bot to the registry




- Administrator

Learn how to add external bot services to the **Designer Bot Registry** so you can use them in your applications.

Related documentation:

-

You can access the Designer **Bot Registry** from the **Grammars & Bots** menu.

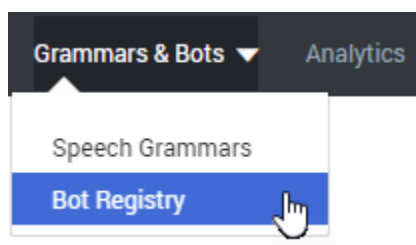

Before you start

The Bot Registry does not enable you to create bots. Rather, it stores information about bots that you've configured with a supported bot service provider.

Before you can add a bot resource to the registry, you'll need to set it up with your bot service provider. During registration, you might need to provide certain account details, such as URLs, user IDs, or passwords that Designer requires to access the bot. If you are not sure where to get the information required to register the bot, check with your bot service provider.

After you've added a bot to the registry, you can start using it by adding a Bot Block to your application.

Supported bot service providers

Important

Some bot services may not be available in all deployments. Check with your Genesys representative to confirm which bot services are supported in your environment.

Designer currently supports the following bot types:

- Google Dialogflow CX (can be enabled upon request)
- Google Dialogflow ES
- Amazon Lex

Adding a bot resource to the registry

[Link to video](#)

Click **Add Bot Definition** and enter the details for your bot. You can then test your bot's connection and save it to the registry. Watch the video to see a quick demonstration of how to add a bot resource to Designer.


For more information about adding specific bot types, see:

- Adding a Google Dialogflow CX bot
- Adding a Google Dialogflow ES bot
- Adding an Amazon Lex bot

Adding a Google Dialogflow CX bot to the registry


For Google **Dialogflow CX** bots, you can import a JSON file that contains the settings for your bot resource. You can export this file from your Dialogflow CX account page. If you need help doing this, refer to the Dialogflow documentation.

Click **Add Bot Definition** and enter a **Name** for the bot (check valid naming characters for a list of approved characters you can use when naming a bot resource). For the **Type**, select **Dialogflow CX** from the list of supported bot services.

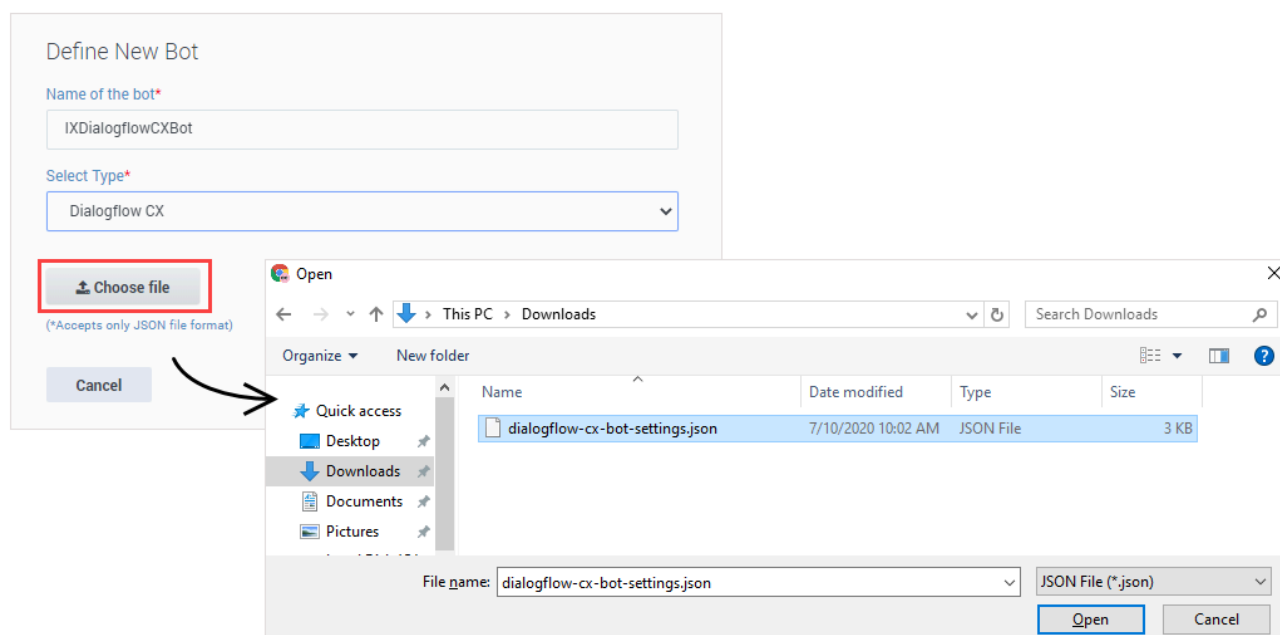

Click **Choose file** to select the JSON file that contains the setting for your bot and click **Open**. Designer imports the settings for your bot and displays the bot properties. You must also manually enter the following details for your Dialogflow CX bot service to work with Designer:

- **Location** - the geographical location (i.e. region ID) of your CX bot agent. Examples: us-east1, europe-west1, asia-south1.
- **Agent ID** - the agent ID of your CX bot.
- **Environment ID** (Optional) If you have created different versions and environments in your bot settings, you can use this field to enter the ID of an environment that corresponds to a specific version of the flow. You can find this ID in the bot settings (under **Manage** > **Testing & Deployment** > **Environments**) by checking the URL of the selected environment:

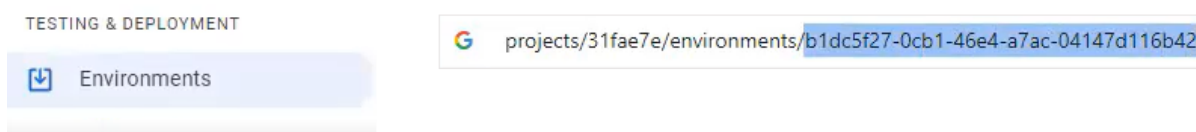

If left blank, Designer uses the latest version of the draft agent that is deployed to the default environment.

Here is an example of the properties for a Dialogflow CX bot:

The image shows a web form for configuring a Dialogflow CX bot. The form is titled "IXDialogflowCXBot" and has a "Type : Dialogflow CX" label. It contains several text input fields: "Description" (with the value "Sample Dialogflow CX Bot"), "Project ID" (with the value "speech-api-123456789"), "Private Key" (with masked characters "*****"), "Client Email" (with the value "dialogflow-123456789@speech-api-123456789-gcp.com"), "Location" (with the value "us-central1"), "Agent ID" (with the value "91d5876e-1234-5678-9abc-def012345678"), and "Environment ID" (with the value "aee08abd-1234-5678-9abc-def012345678"). There is a checkbox labeled "Analyze Sentiment" which is checked. At the bottom, there are four buttons: "Delete", "Test Connection", "Reset", and "Save".


Example of the properties for a Dialogflow CX bot.
Click for larger view.

After you've entered the required settings, click **Test Connection** to check if Designer can communicate with it. If the test fails, check your bot details and try again. When you are finished, click **Save** to add it to the registry. You can now use the bot in your applications by adding a Bot Block to your application.

Adding a Google Dialogflow ES bot to the registry

For Google **Dialogflow ES** bots, you can import a JSON file that contains all of the required settings for your bot resource. You can export this file from your Dialogflow account page. If you need help doing this, refer to the Dialogflow documentation.

Click **Add Bot Definition** and enter a **Name** for the bot (check valid naming characters for a list of approved characters you can use when naming a bot resource). For the **Type**, select **Dialogflow**.

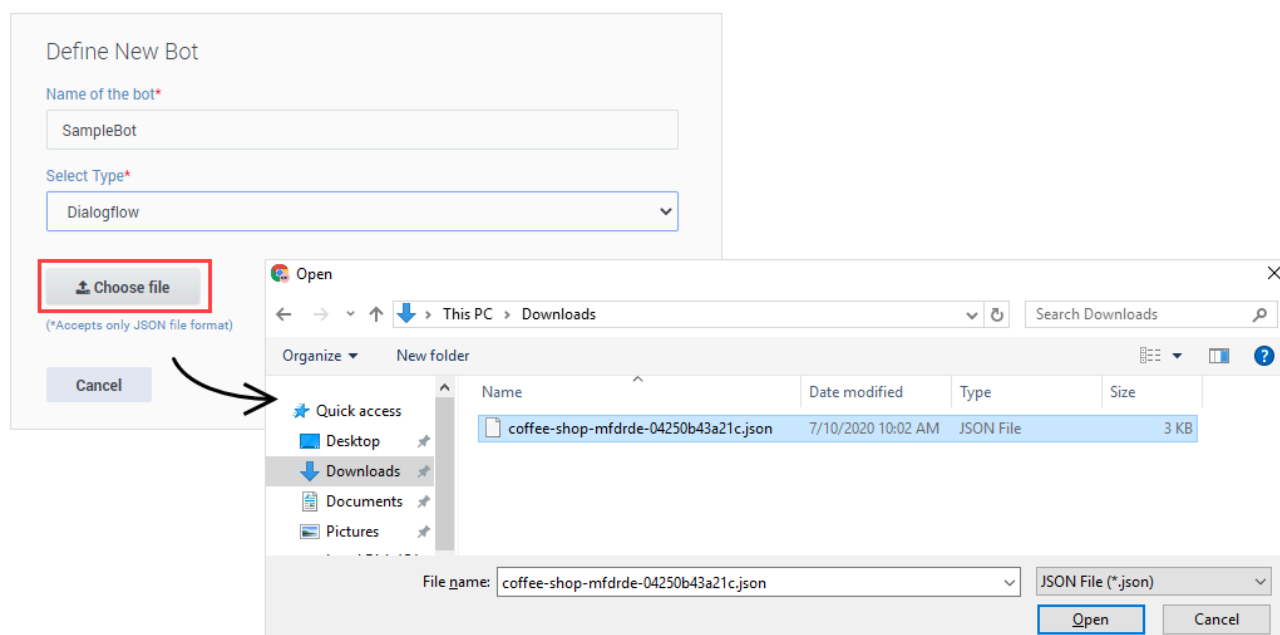

Click **Choose file** to select the JSON file that contains the setting for your bot and click **Open**. Designer imports the settings for your bot and displays the bot properties.

Wait Conversation End

You can also select an optional setting called **Wait Conversation End**. When enabled, the Bot Block recognizes intents that are marked as end-of-conversation intents in the bot.

Here is an example of the properties for a Dialogflow ES bot:

The image shows a form for configuring a Dialogflow ES bot. The title is 'DialogFlow-ScheduleAppointment' and the type is 'Dialogflow'. The form has several fields: 'Description' with the value 'Dialog Flow Bot ScheduleAppointment', 'Project ID' with 'speech-ap-000000', 'Private Key' with a redacted value, and 'Client Email' with 'dialogflow-client-000000@speech-ap-000000-on.gcpmanagedmail.com'. There is a checkbox for 'Wait Conversation End' which is checked. At the bottom, there are buttons for 'Delete', 'Test Connection', 'Reset', and 'Save'.

Example of the settings for a Dialogflow ES bot. Click for larger view.

After you've entered the settings, click **Test Connection** to check if Designer can communicate with it. If the test fails, check your bot details and try again. When you are finished, click **Save** to add it to the registry. You can now use the bot in your applications by adding a Bot Block to your application.

Adding an Amazon Lex bot to the registry

Click **Add Bot Definition** and enter a **Name** for the bot (check valid naming characters for a list of approved characters you can use when naming a bot resource). For the **Type**, select **LEX** and click **Submit**.

For Amazon Lex bots, you'll need to provide the following details:

- **Bot Name** – The name of the bot in Lex.
- **Bot Alias** – The name of the alias that the bot was published to. (An *alias* points to a specific version of your Lex bot.)
- **Region** – The region the bot is located in. This corresponds to the region indicated in your Amazon Web Services (AWS) console (e.g. us-east-1, us-west-2).
- **Access Key ID** and **Secret Access Key** – These credentials are created and managed from AWS Identity and Access Management (IAM) and require the appropriate permissions to interact with Lex.

Here is an example of the settings for a LEX bot:

A screenshot of the Amazon Lex console showing the configuration for a bot named 'Lee booktrip'. The form includes fields for Description, Bot Name, Bot Alias, Region, Access Key ID, and Secret Access Key. The 'Type' is set to 'LEX'. At the bottom, there are buttons for 'Delete', 'Test Connection', 'Reset', and 'Save'.

Example of the settings for a LEX bot. Click for larger view.

After you've entered the required settings, click **Test Connection** to check if Designer can communicate with it. If the test fails, check your bot details and try again. When you are finished, click **Save** to add it to the registry. You can now use the bot in your applications by adding a Bot Block to your application.