



This PDF is generated from authoritative online content, and is provided for convenience only. This PDF cannot be used for legal purposes. For authoritative understanding of what is and is not supported, always use the online content. To copy code samples, always use the online content.

## Operations

Sample Kibana queries

Sample Kibana queries to find logs

## Related documentation:

•

## RSS:


- [For private edition](#)

Here are some sample queries for you to understand what information could be searched for in Kibana. The search is specific to the values in the query. It returns the log messages that matches the query.

### Query 1: To return podname , namespace , and container name

```
kubernetes.pod_name:"t100-0" AND kubernetes.namespace_name:"voice" AND kubernetes.container_name.raw:"tenant"
```


### Output:

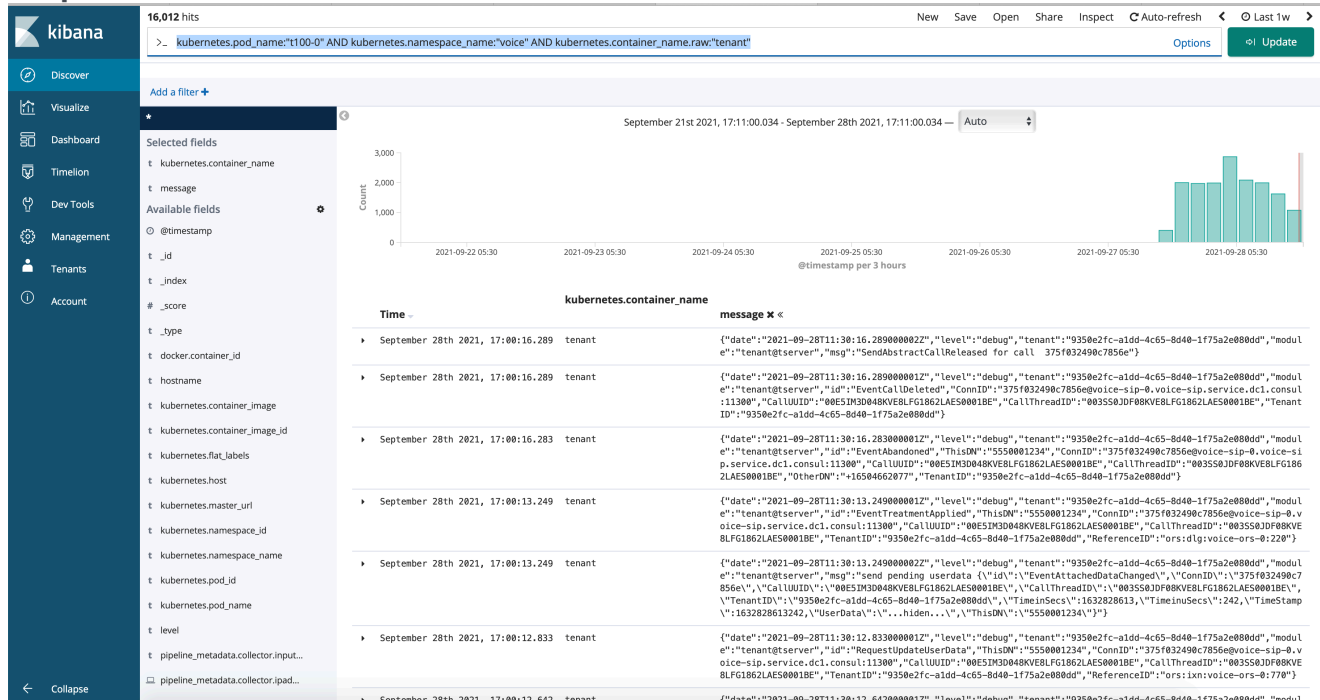

## Query 2: Any string and logs listed with the string

"Voice-sip"


### Output

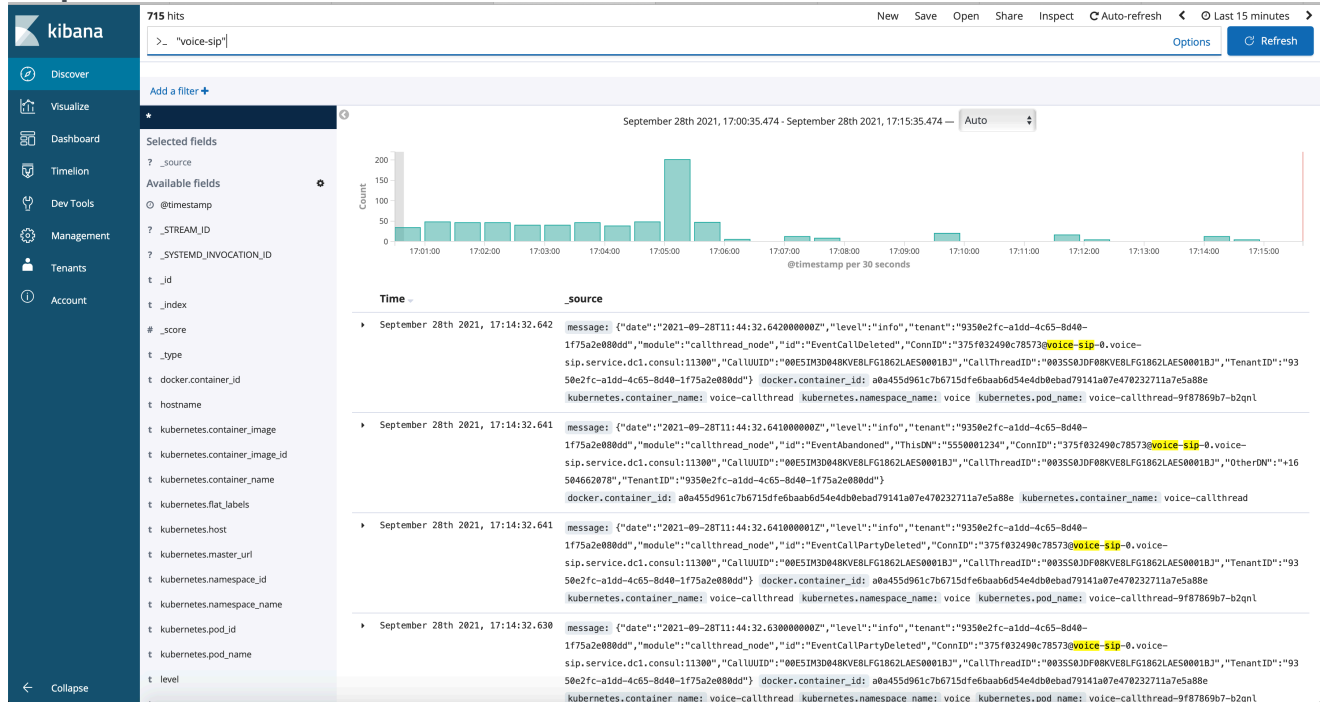

## Query 3: Any combination with service, service name, instance , name , version, any value available in the logs

"service=ixn" AND "servicename=ixn-vqnode"

### Output:

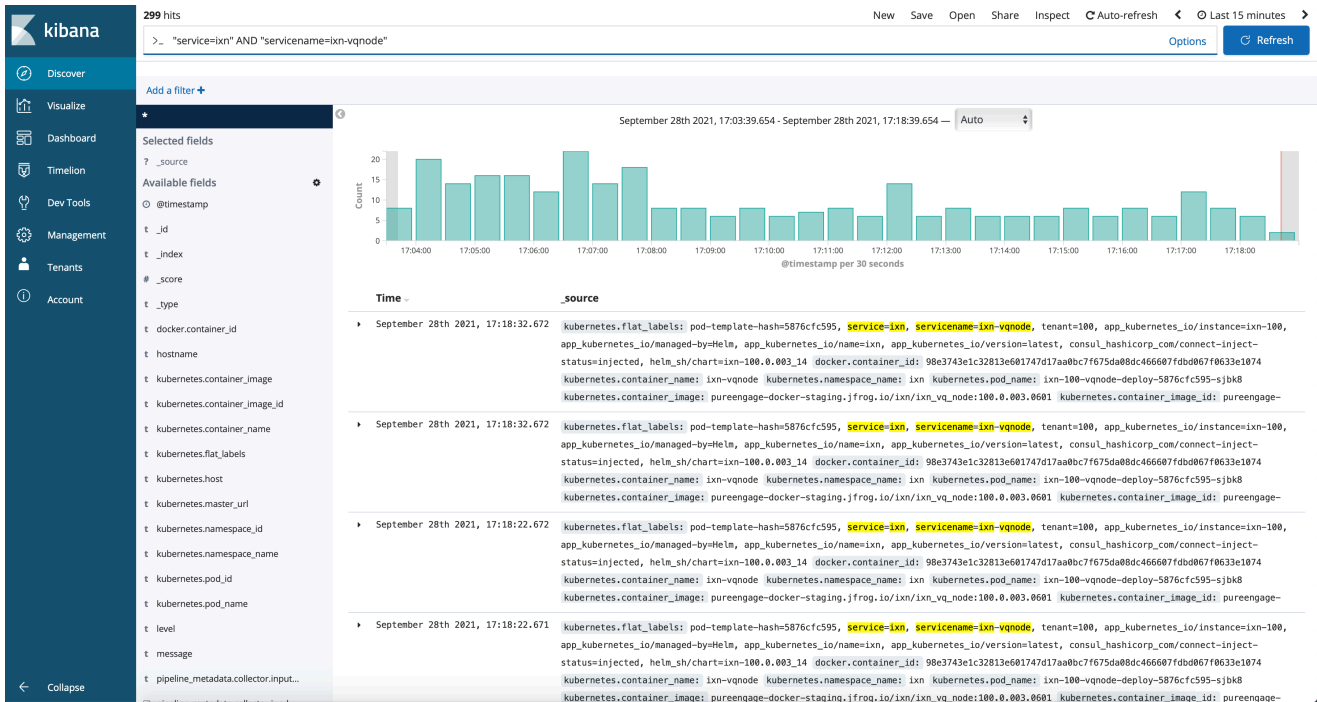

### Query 4: CallUUID is consistent across interactions

kubernetes.pod\_name."voice-sip-0" AND kubernetes.namespace\_name."voice" AND kubernetes.container\_name.raw."voice-sip" AND "CallUUID.00E5IM3D048KVE8LFG1862LAES0001SP"

### Output:

